



REVISION HISTORY				
ECO	REV	DESCRIPTION	APPROVED	DATE
-	2	2ND PROTOTYPE	KEITH B.	8-14-13

NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610
2. MAXIMUM SOLDER TEMPERATURE IS 240 DEGREES CELSIUS
3. DEPANELIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE BREAKOUT TABS ON FOUR SIDES OF THE BOARD
4. PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS. LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER. MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
5. ASSEMBLY PROCESS SHALL INCLUDE: REFLOW SOLDER TOP SIDE SMD
6. DO NOT APPLY ANY KIND OF ASSEMBLY OR QA STAMP TO ANY BOARD

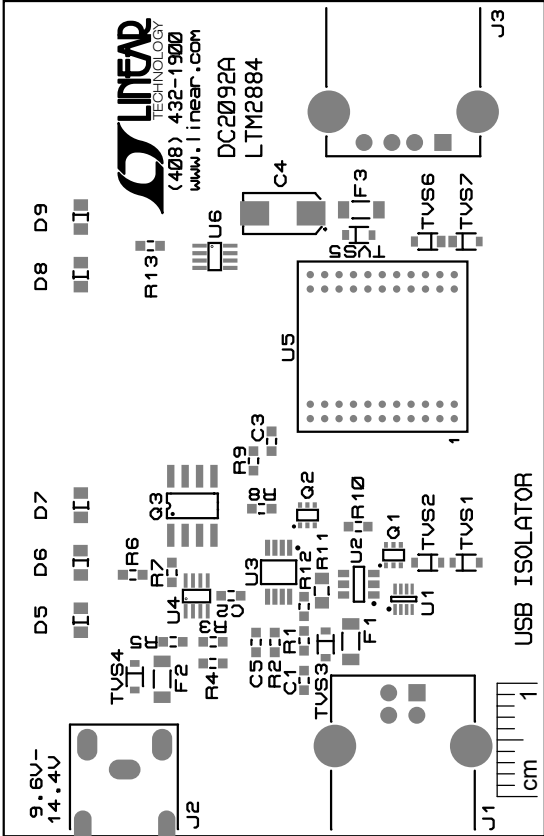

APPROVALS		<div></div> <div>1630 McCarthy Blvd. Milpitas, CA 95035 Phone: (408) 432-1900 Fax: (408) 434-0507 www.linear.com</div> <div>LTC CONFIDENTIAL FOR CUSTOMER USE ONLY</div>	
PCB DES.	KEITH B.		
APP ENG.	KEITH B.		
TITLE: ASSEMBLY DRAWING USB ISOLATOR		REV. 2	
SIZE N/A		IC NO. LTM2884IY DEMO CIRCUIT 2092A	
SCALE = 1.5:1		DATE: Wednesday August 14, 2013	
		SHEET 1 OF 1	