

## Ultralow Offset Voltage Dual Op Amp

### FEATURES

- ▶ Very high DC precision
  - ▶ 50  $\mu\text{V}$  maximum offset voltage
  - ▶ 0.3  $\mu\text{V}/^\circ\text{C}$  maximum offset voltage drift
  - ▶ 0.35  $\mu\text{V}$  p-p maximum voltage noise (0.1 Hz to 10 Hz)
  - ▶ 5 million V/V minimum open-loop gain
  - ▶ 130 dB minimum CMRR
  - ▶ 120 dB minimum PSRR
- ▶ Matching characteristics
  - ▶ 30  $\mu\text{V}$  maximum offset voltage match
  - ▶ 0.3  $\mu\text{V}/^\circ\text{C}$  maximum offset voltage drift match
  - ▶ 130 dB minimum CMRR match
- ▶ Available in 8-lead narrow body, PDIP, and hermetic CERDIP and CERDIP/883B packages

### GENERAL DESCRIPTION

The AD708 is a high precision, dual monolithic operational amplifier. Each amplifier individually offers excellent DC precision with maximum offset voltage and offset voltage drift of any dual bipolar op amp.

The matching specifications are among the best available in any dual op amp. In addition, the AD708 provides 5 V/ $\mu\text{V}$  minimum open-loop gain and guaranteed maximum input voltage noise of 350 nV p-p (0.1 Hz to 10 Hz). All DC specifications show excellent stability over temperature, with offset voltage drift typically 0.1  $\mu\text{V}/^\circ\text{C}$  and input bias current drift of 25 pA/ $^\circ\text{C}$  maximum.

The AD708 is available in four performance grades. The AD708J is rated over the commercial temperature range of 0 $^\circ\text{C}$  to 70 $^\circ\text{C}$  and is available in a narrow body, PDIP. The AD708A and AD708B are rated over the industrial temperature range of -40 $^\circ\text{C}$  to +85 $^\circ\text{C}$  and are available in a CERDIP.

The AD708S is rated over the military temperature range of -55 $^\circ\text{C}$  to +125 $^\circ\text{C}$  and is available in a CERDIP military version processed to MIL-STD-883B.

### PIN CONFIGURATION

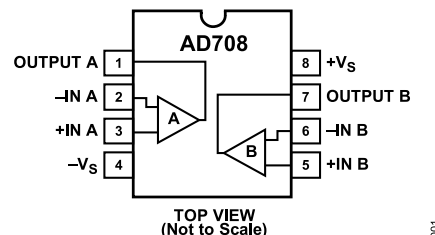


Figure 1. PDIP (N) and CERDIP (Q) Packages

### PRODUCT HIGHLIGHTS

1. The combination of outstanding matching and individual specifications make the AD708 ideal for constructing high gain, precision instrumentation amplifiers.
2. The low offset voltage drift and low noise of the AD708 allow the designer to amplify very small signals without sacrificing overall system performance.
3. The AD708 10 V/ $\mu\text{V}$  typical open-loop gain and 140 dB common-mode rejection make it ideal for precision applications.

TABLE OF CONTENTS

|                                          |   |                                              |    |
|------------------------------------------|---|----------------------------------------------|----|
| Features.....                            | 1 | Theory of Operation.....                     | 10 |
| General Description.....                 | 1 | Crosstalk Performance.....                   | 10 |
| Pin Configuration.....                   | 1 | Operation With a Gain of $-100$ .....        | 10 |
| Product Highlights.....                  | 1 | High Precision Programmable Gain Amplifier.. | 11 |
| Specifications.....                      | 3 | Bridge Signal Conditioner.....               | 11 |
| Absolute Maximum Ratings.....            | 5 | Precision Absolute Value Circuit.....        | 12 |
| ESD Caution.....                         | 5 | Selection of Passive Components.....         | 12 |
| Typical Performance Characteristics..... | 6 | Outline Dimensions.....                      | 13 |
| Matching Characteristics.....            | 9 | Ordering Guide.....                          | 13 |

REVISION HISTORY

6/2026—Rev. D to Rev. E

|                                                                                                   |    |
|---------------------------------------------------------------------------------------------------|----|
| Change to Features Section.....                                                                   | 1  |
| Changes to Input Offset Voltage Parameter, Input Bias Current Parameter, and Note 1, Table 1..... | 3  |
| Changes in Table 3.....                                                                           | 10 |
| Change to High Precision Programmable Gain Amplifier Section.....                                 | 11 |
| Changes to Precision Absolute Value Circuit Section.....                                          | 12 |

## SPECIFICATIONS

At 25°C and ±15 V DC, unless otherwise noted.

Table 1.

| Parameter                             | Test Conditions/<br>Comments         | AD708J/AD708A    |      |                  | AD708B           |      |                  | AD708S           |      |                  | Unit     |
|---------------------------------------|--------------------------------------|------------------|------|------------------|------------------|------|------------------|------------------|------|------------------|----------|
|                                       |                                      | Min <sup>1</sup> | Typ  | Max <sup>1</sup> | Min <sup>1</sup> | Typ  | Max <sup>1</sup> | Min <sup>1</sup> | Typ  | Max <sup>1</sup> |          |
| INPUT OFFSET VOLTAGE <sup>2</sup>     |                                      |                  | 30   | 100              |                  | 5    | 50               |                  | 5    | 50               | μV       |
|                                       | T <sub>MIN</sub> to T <sub>MAX</sub> |                  | 50   | 150              |                  | 15   | 65               |                  | 15   | 50               | μV       |
| Drift                                 |                                      |                  | 0.3  | 1.0              |                  | 0.1  | 0.4              |                  | 0.1  | 0.3              | μV/°C    |
| Long Term Stability                   |                                      |                  | 0.3  |                  |                  | 0.3  |                  |                  | 0.3  |                  | μV/month |
| INPUT BIAS CURRENT                    |                                      |                  | 1.0  | 2.5              |                  | 0.5  | 1.0              |                  | 0.5  | 2                | nA       |
|                                       | T <sub>MIN</sub> to T <sub>MAX</sub> |                  | 2.0  | 4.0              |                  | 1.0  | 2.0              |                  | 1.0  | 4                | nA       |
| Average Drift                         |                                      |                  | 15   | 40               |                  | 10   | 25               |                  | 10   | 30               | pA/°C    |
| OFFSET CURRENT                        | V <sub>CM</sub> = 0 V                |                  | 0.5  | 2.0              |                  | 0.1  | 1.0              |                  | 0.1  | 1                | nA       |
|                                       | T <sub>MIN</sub> to T <sub>MAX</sub> |                  | 2.0  | 4.0              |                  | 0.2  | 1.5              |                  | 0.2  | 1.5              | nA       |
| Average Drift                         |                                      |                  | 2    | 60               |                  | 1    | 25               |                  | 1    | 25               | pA/°C    |
| MATCHING CHARACTERISTICS <sup>3</sup> |                                      |                  |      |                  |                  |      |                  |                  |      |                  |          |
| Offset Voltage                        |                                      |                  |      | 80               |                  |      | 50               |                  |      | 30               | μV       |
|                                       | T <sub>MIN</sub> to T <sub>MAX</sub> |                  |      | 150              |                  |      | 75               |                  |      | 50               | μV       |
| Offset Voltage Drift                  |                                      |                  |      | 1.0              |                  |      | 0.4              |                  |      | 0.3              | μV/°C    |
| Input Bias Current                    |                                      |                  |      | 4.0              |                  |      | 1.0              |                  |      | 1.0              | nA       |
|                                       | T <sub>MIN</sub> to T <sub>MAX</sub> |                  |      | 5.0              |                  |      | 2.0              |                  |      | 2.0              | nA       |
| Common-Mode Rejection                 |                                      | 120              | 140  |                  | 130              | 140  |                  | 130              | 140  |                  | dB       |
|                                       | T <sub>MIN</sub> to T <sub>MAX</sub> | 110              |      |                  | 130              |      |                  | 130              |      |                  | dB       |
| Power Supply Rejection                |                                      | 110              |      |                  | 120              |      |                  | 120              |      |                  | dB       |
|                                       | T <sub>MIN</sub> to T <sub>MAX</sub> | 110              |      |                  | 120              |      |                  | 120              |      |                  | dB       |
| Channel Separation                    |                                      | 135              |      |                  | 140              |      |                  | 140              |      |                  | dB       |
| INPUT VOLTAGE NOISE                   | 0.1 Hz to 10 Hz                      |                  | 0.23 | 0.6              |                  | 0.23 | 0.6              |                  | 0.23 | 0.35             | μV p-p   |
|                                       | f = 10 Hz                            |                  | 10.3 | 18               |                  | 10.3 | 12               |                  | 10.3 | 12               | nV/√Hz   |
|                                       | f = 100 Hz                           |                  | 10.0 | 13.0             |                  | 10.0 | 11.0             |                  | 10.0 | 11               | nV/√Hz   |
|                                       | f = 1 kHz                            |                  | 9.6  | 11.0             |                  | 9.6  | 11.0             |                  | 9.6  | 11               | nV/√Hz   |
| INPUT CURRENT NOISE                   | 0.1 Hz to 10 Hz                      |                  | 14   | 35               |                  | 14   | 35               |                  | 14   | 35               | pA p-p   |
|                                       | f = 10 Hz                            |                  | 0.32 | 0.9              |                  | 0.32 | 0.8              |                  | 0.32 | 0.8              | pA/√Hz   |
|                                       | f = 100 Hz                           |                  | 0.14 | 0.27             |                  | 0.14 | 0.23             |                  | 0.14 | 0.23             | pA/√Hz   |
|                                       | f = 1 kHz                            |                  | 0.12 | 0.18             |                  | 0.12 | 0.17             |                  | 0.12 | 0.17             | pA/√Hz   |
| COMMON-MODE REJECTION RATIO           | V <sub>CM</sub> = ±13 V              | 120              | 140  |                  | 130              | 140  |                  | 130              | 140  |                  | dB       |
|                                       | T <sub>MIN</sub> to T <sub>MAX</sub> | 120              | 140  |                  | 130              | 140  |                  | 130              | 140  |                  | dB       |
| OPEN-LOOP GAIN                        | V <sub>O</sub> = ±10 V               |                  |      |                  |                  |      |                  |                  |      |                  |          |
|                                       | R <sub>LOAD</sub> ≥ 2 kΩ             | 3                | 10   |                  | 5                | 10   |                  | 4                | 10   |                  | V/μV     |
|                                       | T <sub>MIN</sub> to T <sub>MAX</sub> | 3                | 10   |                  | 5                | 10   |                  | 4                | 7    |                  | V/μV     |
| POWER SUPPLY REJECTION RATIO          | V <sub>S</sub> = ±3 V to ±18 V       | 110              | 130  |                  | 120              | 130  |                  | 120              | 130  |                  | dB       |
|                                       | T <sub>MIN</sub> to T <sub>MAX</sub> | 110              | 130  |                  | 120              | 130  |                  | 120              | 130  |                  | dB       |
| FREQUENCY RESPONSE                    |                                      |                  |      |                  |                  |      |                  |                  |      |                  |          |
| Closed-Loop Bandwidth                 |                                      | 0.5              | 0.9  |                  | 0.5              | 0.9  |                  | 0.5              | 0.9  |                  | MHz      |
| Slew Rate                             |                                      | 0.15             | 0.3  |                  | 0.15             | 0.3  |                  | 0.15             | 0.3  |                  | V/μs     |
| INPUT RESISTANCE                      |                                      |                  |      |                  |                  |      |                  |                  |      |                  |          |
| Differential                          |                                      |                  | 60   |                  |                  | 200  |                  |                  | 200  |                  | MΩ       |
| Common Mode                           |                                      |                  | 200  |                  |                  | 400  |                  |                  | 400  |                  | GΩ       |
| OUTPUT VOLTAGE                        | R <sub>LOAD</sub> ≥ 10 kΩ            | 13.5             | 14   |                  | 13.5             | 14.0 |                  | 13.5             | 14   |                  | ±V       |
|                                       | R <sub>LOAD</sub> ≥ 2 kΩ             | 12.5             | 13.0 |                  | 12.5             | 13.0 |                  | 12.5             | 13   |                  | ±V       |
|                                       | R <sub>LOAD</sub> ≥ 1 kΩ             | 12.0             | 12.5 |                  | 12.0             | 12.5 |                  | 12.0             | 12.5 |                  | ±V       |
|                                       | T <sub>MIN</sub> to T <sub>MAX</sub> | 12.0             | 13.0 |                  | 12.0             | 13.0 |                  | 12.0             | 13   |                  | ±V       |

## SPECIFICATIONS

Table 1. (Continued)

| Parameter                   | Test Conditions/<br>Comments                      | AD708J/AD708A    |     |                  | AD708B           |     |                  | AD708S           |     |                  | Unit     |
|-----------------------------|---------------------------------------------------|------------------|-----|------------------|------------------|-----|------------------|------------------|-----|------------------|----------|
|                             |                                                   | Min <sup>1</sup> | Typ | Max <sup>1</sup> | Min <sup>1</sup> | Typ | Max <sup>1</sup> | Min <sup>1</sup> | Typ | Max <sup>1</sup> |          |
| OPEN-LOOP OUTPUT RESISTANCE |                                                   | 60               |     |                  | 60               |     |                  | 60               |     |                  | $\Omega$ |
| POWER SUPPLY                |                                                   |                  |     |                  |                  |     |                  |                  |     |                  |          |
| Quiescent Current           | $V_S = \pm 15\text{ V}$<br>$V_S = \pm 3\text{ V}$ |                  | 4.5 | 5.5              |                  | 4.5 | 5.5              |                  | 4.5 | 5.5              | mA       |
| Power Consumption           |                                                   |                  | 135 | 165              |                  | 135 | 165              |                  | 135 | 165              | mW       |
|                             |                                                   |                  | 12  | 18               |                  | 12  | 18               |                  | 12  | 18               | mW       |
| Operating Range             |                                                   | $\pm 3$          |     | $\pm 18$         | $\pm 3$          |     | $\pm 18$         | $\pm 3$          |     | $\pm 18$         | V        |

<sup>1</sup> All min and max specifications are guaranteed.

<sup>2</sup> Input offset voltage specifications are guaranteed after five minutes of operation at  $T_A = 25^\circ\text{C}$ .

<sup>3</sup> Matching is defined as the difference between parameters of the two amplifiers.

## ABSOLUTE MAXIMUM RATINGS

Table 2.

| Parameter                               | Rating                                          |
|-----------------------------------------|-------------------------------------------------|
| Supply Voltage                          | $\pm 22$ V                                      |
| Internal Power Dissipation <sup>1</sup> |                                                 |
| Input Voltage <sup>2</sup>              | $\pm V_S$                                       |
| Output Short-Circuit Duration           | Indefinite                                      |
| Differential Input Voltage              | $+V_S$ and $-V_S$                               |
| Storage Temperature Range (Q)           | $-65^{\circ}\text{C}$ to $+150^{\circ}\text{C}$ |
| Storage Temperature Range (N)           | $-65^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ |
| Lead Temperature (Soldering 60 sec)     | $300^{\circ}\text{C}$                           |

<sup>1</sup> Thermal Characteristics8-lead PDIP:  $\theta_{JC} = 33^{\circ}\text{C/W}$ ,  $\theta_{JA} = 100^{\circ}\text{C/W}$ 8-lead CERDIP:  $\theta_{JC} = 30^{\circ}\text{C/W}$ ,  $\theta_{JA} = 110^{\circ}\text{C/W}$ <sup>2</sup> For supply voltages less than  $\pm 22$  V, the absolute maximum input voltage is equal to the supply voltage.

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

## ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## TYPICAL PERFORMANCE CHARACTERISTICS

$V_S = \pm 15\text{ V}$  and  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

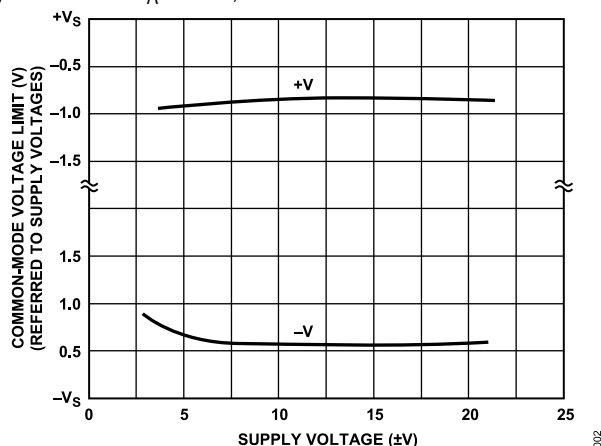


Figure 2. Input Common-Mode Range vs. Supply Voltage

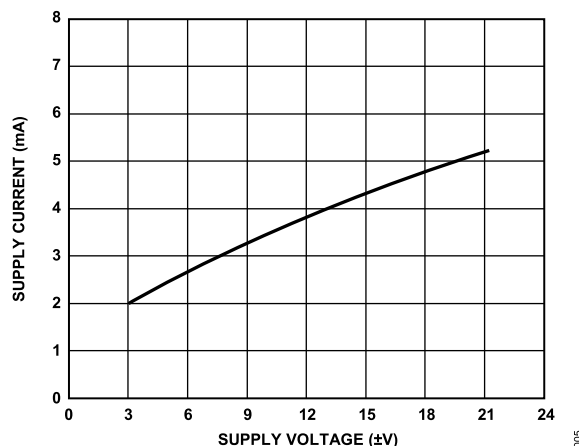


Figure 5. Supply Current vs. Supply Voltage

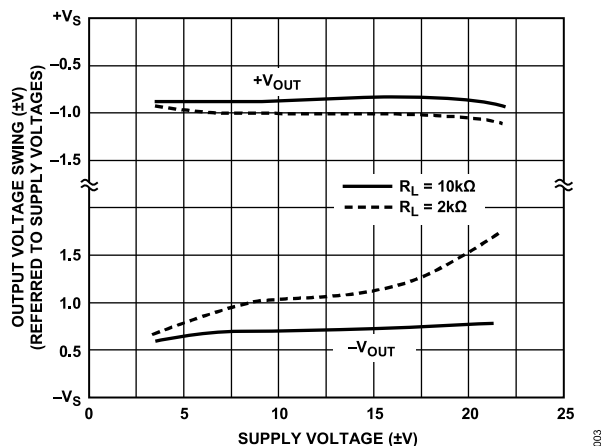


Figure 3. Output Voltage Swing vs. Supply Voltage

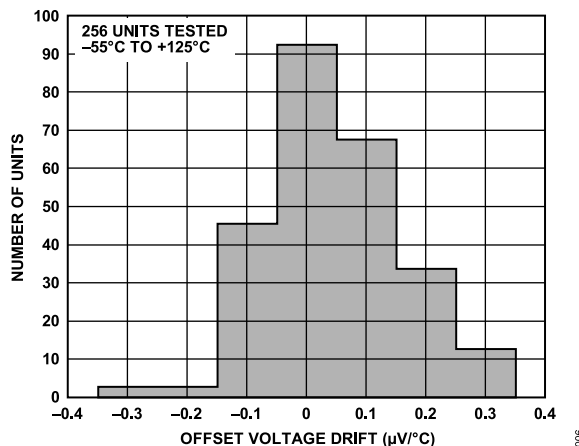


Figure 6. Typical Distribution of Offset Voltage Drift

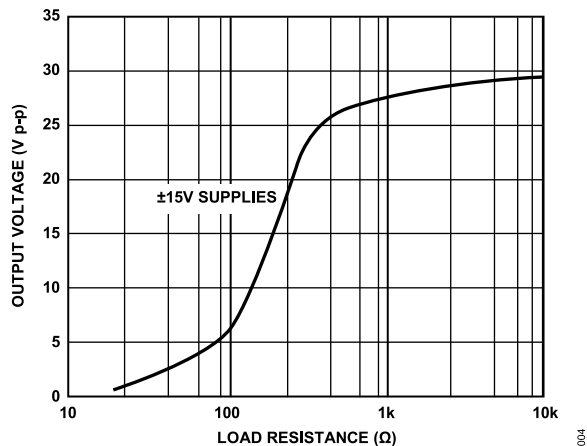


Figure 4. Output Voltage Swing vs. Load Resistance

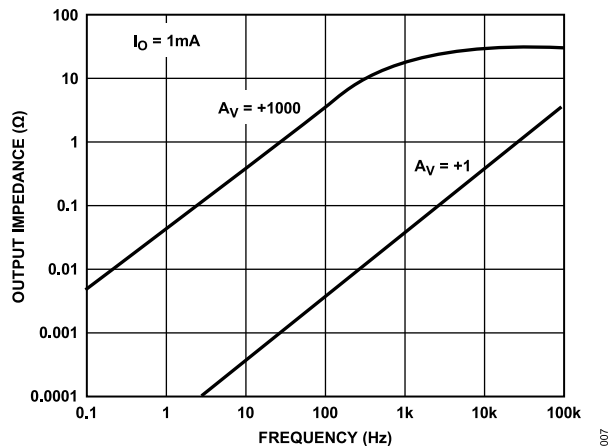


Figure 7. Output Impedance vs. Frequency

## TYPICAL PERFORMANCE CHARACTERISTICS

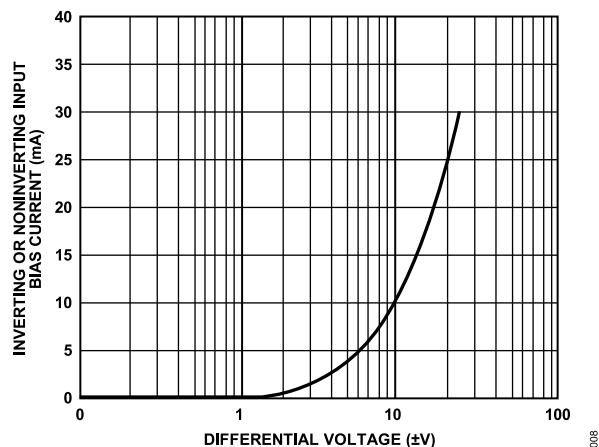


Figure 8. Input Bias Current vs. Differential Input Voltage

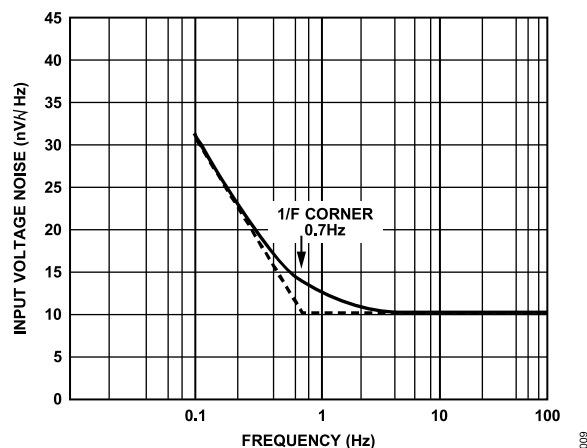


Figure 9. Input Noise Spectral Density

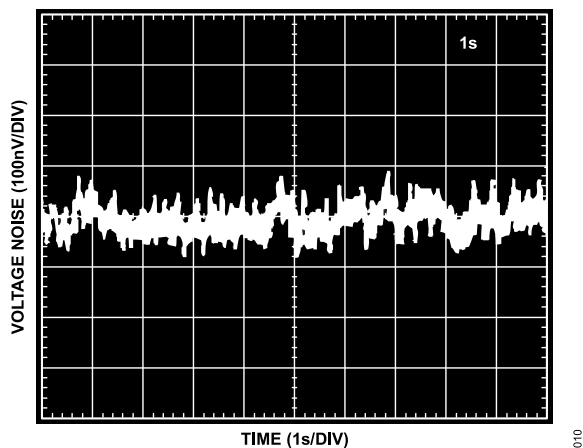


Figure 10. 0.1 Hz to 10 Hz Voltage Noise

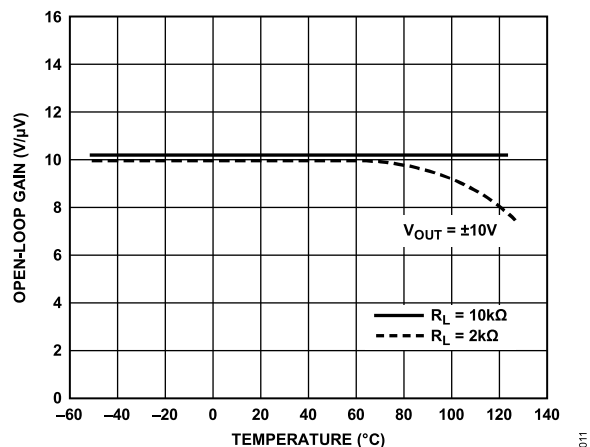


Figure 11. Open-Loop Gain vs. Temperature

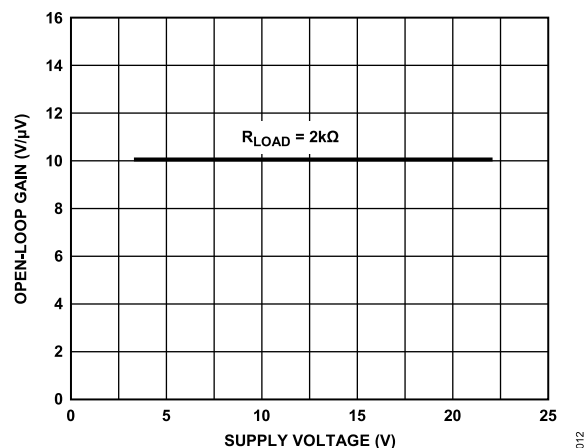


Figure 12. Open-Loop Gain vs. Supply Voltage

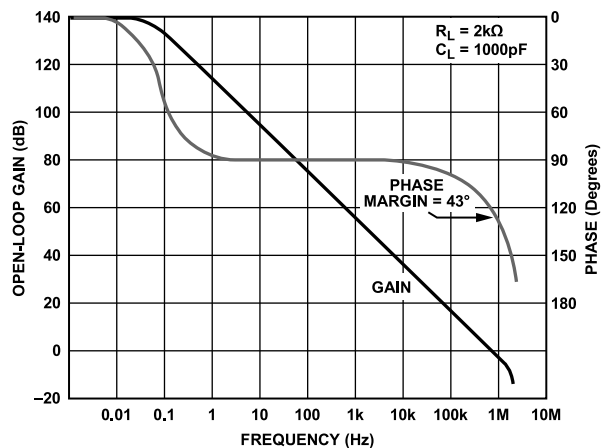


Figure 13. Open-Loop Gain and Phase vs. Frequency

TYPICAL PERFORMANCE CHARACTERISTICS

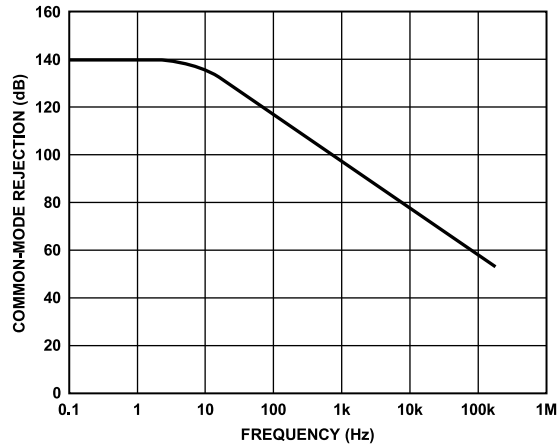


Figure 14. Common-Mode Rejection vs. Frequency

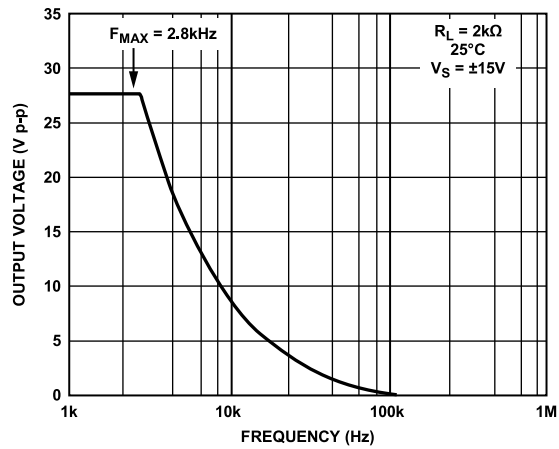


Figure 15. Large Signal Frequency Response

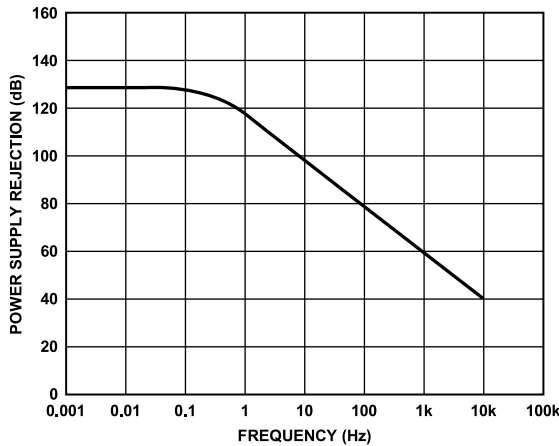


Figure 16. Power Supply Rejection vs. Frequency

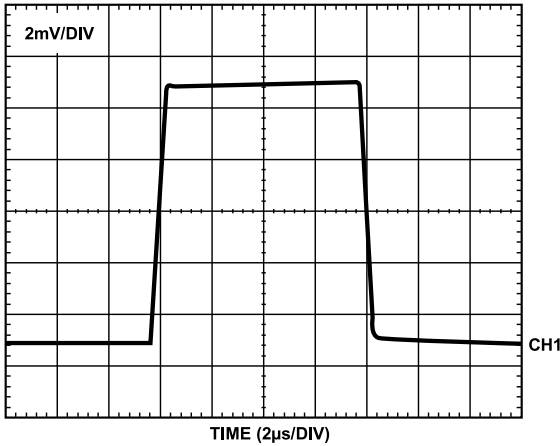


Figure 17. Small Signal Transient Response;  $A_V = +1$ ,  $R_L = 2 \text{ k}\Omega$ ,  $C_L = 50 \text{ pF}$

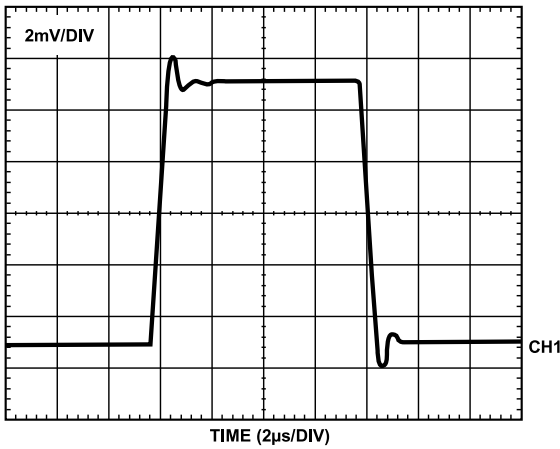


Figure 18. Small Signal Transient Response;  $A_V = +1$ ,  $R_L = 2 \text{ k}\Omega$ ,  $C_L = 1000 \text{ pF}$



## TYPICAL PERFORMANCE CHARACTERISTICS

## MATCHING CHARACTERISTICS

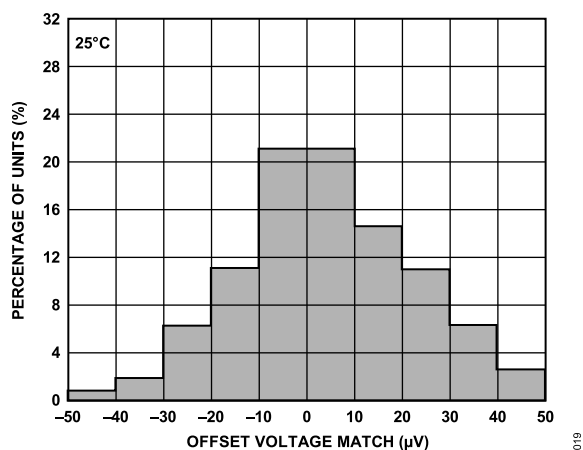


Figure 19. Typical Distribution of Offset Voltage Match

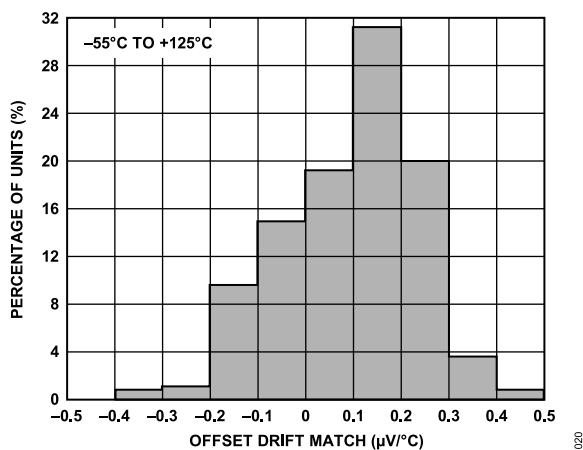


Figure 20. Typical Distribution of Offset Voltage Drift Match

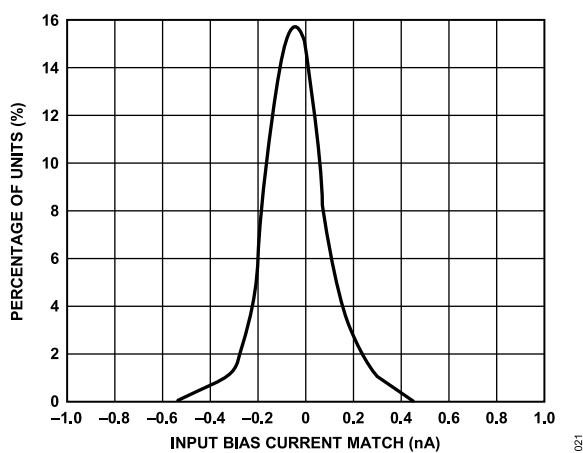


Figure 21. Typical Distribution of Input Bias Current Match

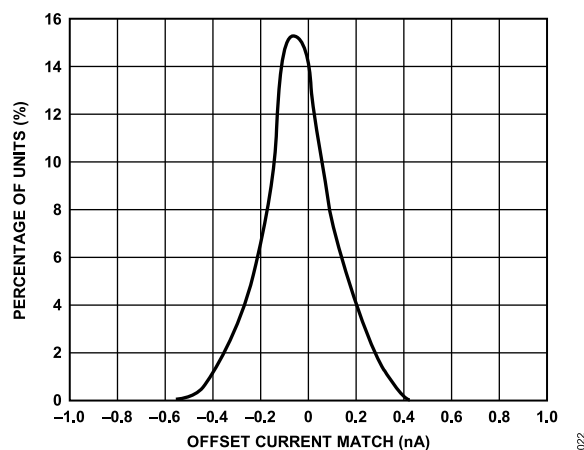


Figure 22. Typical Distribution of Input Offset Current Match

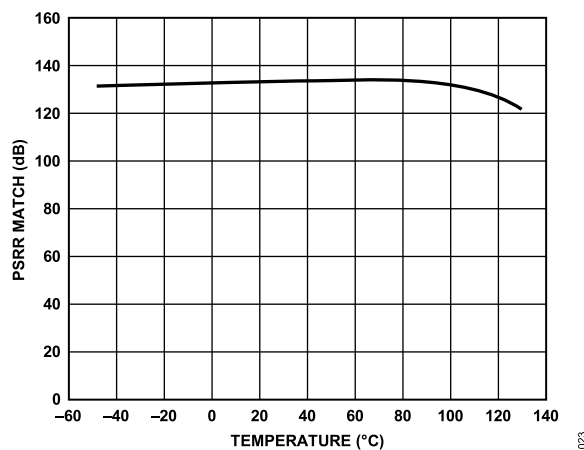


Figure 23. PSRR Match vs. Temperature

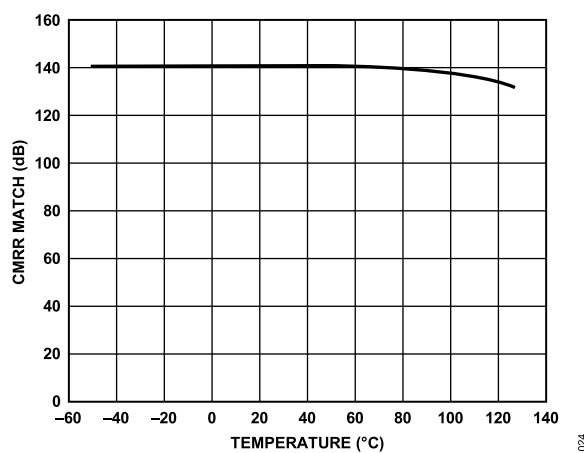


Figure 24. Common-Mode Rejection Ratio (CMRR) Match vs. Temperature

## THEORY OF OPERATION

## CROSSTALK PERFORMANCE

The AD708 exhibits very low crosstalk as shown in Figure 25, Figure 26, and Figure 27. Figure 25 shows the offset voltage induced on Side B of the AD708 when Side A output is moving slowly (0.2 Hz) from  $-10\text{ V}$  to  $+10\text{ V}$  under no load. This is the least stressful situation to the part because the overall power in the chip does not change. Only the location of the power in the output device changes. Figure 26 shows the input offset voltage change to Side B when Side A is driving a  $2\text{ k}\Omega$  load. Here the power changes in the chip with the maximum power change occurring at  $7.5\text{ V}$ . Figure 27 shows crosstalk under the most severe conditions. Side A is connected as a follower with  $0\text{ V}$  input, and is forced to sink and source  $\pm 5\text{ mA}$  of output current.

$$\text{Power} = (30\text{ V})(5\text{ mA}) = 150\text{ mW}$$

Even this large change in power causes only an  $8\text{ }\mu\text{V}$  (linear) change in the input offset voltage of Side B.

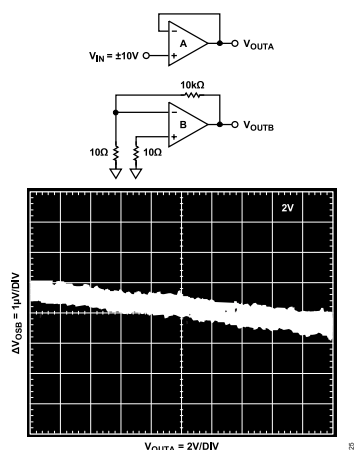


Figure 25. Crosstalk with No Load

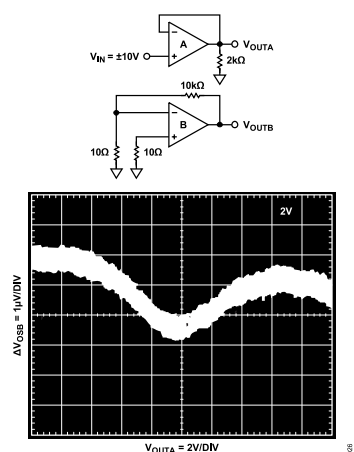
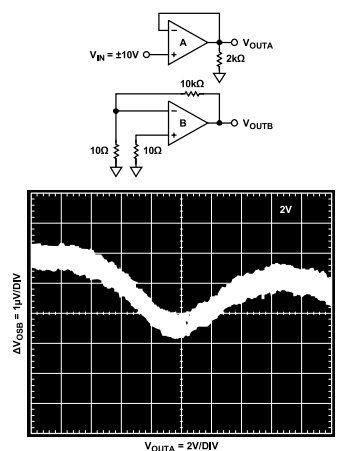
Figure 26. Crosstalk with  $2\text{ k}\Omega$  Load


Figure 27. Crosstalk Under Forced Source and Sink Conditions

OPERATION WITH A GAIN OF  $-100$ 

To show the outstanding DC precision of the AD708 in a real application, Table 3 shows an error budget calculation for a gain of  $-100$ . This configuration is shown in Figure 28.

Table 3.

| Error Sources                   | Maximum Error Contribution, $A_V = 100$ (S Grade), (Full Scale: $V_{OUT} = 10\text{ V}$ , $V_{IN} = 100\text{ mV}$ ) |                                     |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| $V_{OS}$                        | $50\text{ }\mu\text{V}/100\text{ mV}$                                                                                | $= 500\text{ ppm}$                  |
| $I_{OS}$                        | $(100\text{ k}\Omega)(1\text{ nA})/10\text{ V}$                                                                      | $= 10\text{ ppm}$                   |
| Gain ( $2\text{ k}\Omega$ Load) | $10\text{ V}/(5 \times 10^6)/100\text{ mV}$                                                                          | $= 20\text{ ppm}$                   |
| Noise                           | $0.35\text{ mV}/100\text{ mV}$                                                                                       | $= 4\text{ ppm}$                    |
| $V_{OS}$ Drift                  | $(0.3\text{ mV}/^\circ\text{C})/100\text{ mV}$                                                                       | $= 3\text{ ppm}/^\circ\text{C}$     |
| Total Unadjusted Error          | At $25^\circ\text{C}$                                                                                                | $= 534\text{ ppm} > 10\text{ bits}$ |
|                                 | $-55^\circ\text{C}$ to $+125^\circ\text{C}$                                                                          | $= 834\text{ ppm} > 10\text{ bits}$ |
| With Offset Calibrated Out      | At $25^\circ\text{C}$                                                                                                | $= 34\text{ ppm} > 14\text{ bits}$  |
|                                 | $-55^\circ\text{C}$ to $+125^\circ\text{C}$                                                                          | $= 534\text{ ppm} > 10\text{ bits}$ |

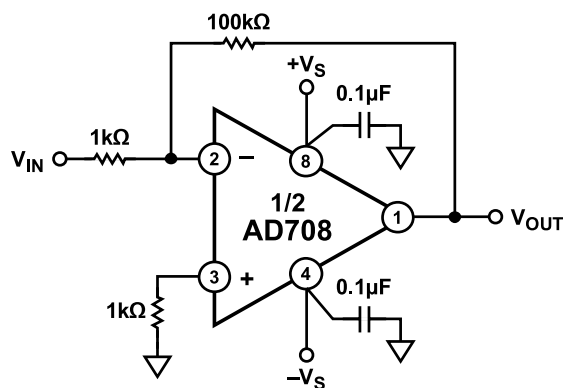Figure 28. Gain of  $-100$  Configuration

This error budget assumes no error in the resistor ratio and no error from power supply variation (the 120 dB minimum PSRR of the

## THEORY OF OPERATION

AD708S makes this a good assumption). The external resistors can cause gain error from mismatch and drift over temperature.

### HIGH PRECISION PROGRAMMABLE GAIN AMPLIFIER

The 3-op-amp programmable gain amplifier shown in Figure 29 utilizes the matching characteristics of the AD708 to achieve high DC precision.

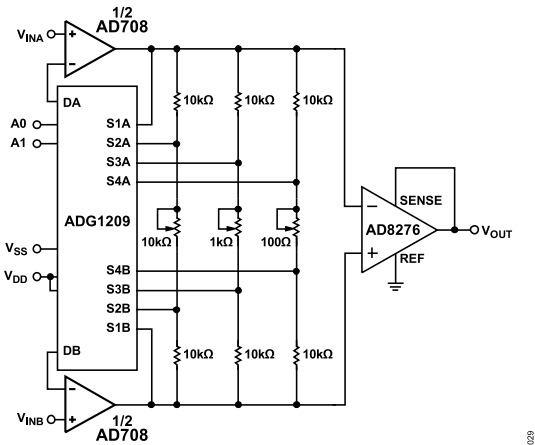


Figure 29. Precision PGA

The gains of the circuit are controlled by the select lines, A0 and A1, of the ADG1209 multiplexer and are 1, 10, 100, and 1000 in this design.

The input stage attains very high DC precision due to the 50 μV maximum offset voltage match of the AD708 and the 1 nA maximum input bias current match. The accuracy is maintained over temperature because of the ultralow drift performance of the AD708.

The AD8276 unity-gain difference amplifier eliminates the need for trimming in the second stage of the instrumentation amplifier. The AD8276 has on-chip resistors that are laser trimmed for excellent gain accuracy and high CMRR.

To determine the CMRR, follow these steps:

1. Connect  $V_{INB}$  to  $V_{INA}$  and apply an input voltage equal to the maximum and minimum full-scale common mode expected.
2. Use the following equation to determine the CMRR:

$$CMRR = 20 \times \log \frac{\Delta V_{CM}}{\Delta V_{OUT}} \quad (1)$$

where  $V_{CM}$  is the common-mode voltage.

To minimize gain errors, follow these steps:

1. Select gain = 10 with the control lines and apply a differential input voltage.
2. Adjust the 10 kΩ potentiometer to  $V_{OUT} = 10 V_{IN}$  (adjust  $V_{IN}$  magnitude as necessary).

3. Repeat Step 1 and Step 2 for gain = 100 and gain = 1000, adjusting the 1 kΩ and 100 Ω potentiometers, respectively.

The design shown in Figure 29 allows 0.1% gain accuracy and 100 dB common-mode rejection when  $\pm 1\%$  resistors and  $\pm 10\%$  potentiometers are used.

### BRIDGE SIGNAL CONDITIONER

The AD708 can be used in the circuit shown in Figure 30 to produce an accurate and inexpensive dynamic bridge conditioner. The low offset voltage match and low offset voltage drift match of the AD708 combine to achieve circuit performance better than all but the best instrumentation amplifiers. The outstanding specifications of the AD708, such as open-loop gain, input offset currents, and low input bias currents, do not limit circuit accuracy.

As configured, the circuit only requires a gain resistor,  $R_G$ , of suitable accuracy and a stable, accurate voltage reference. The transfer function is

$$V_O = V_{REF} [\Delta R / (R + \Delta R)] [R_G / R] \quad (2)$$

The only significant errors due to the AD708S are

$$V_{OS\_OUT} = (V_{OS\_MATCH}) (2R_G / R) = 30 \text{ mV}$$

$$V_{OS\_OUT}(T) = (V_{OS\_DRIFT}) (2R_G / R) = 0.3 \text{ mV}/^\circ\text{C}$$

To achieve high accuracy, Resistor  $R_G$  should be 0.1% or better with a low drift coefficient.

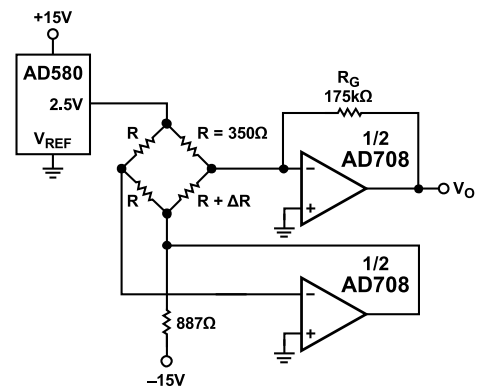


Figure 30. Bridge Signal Conditioning Circuit

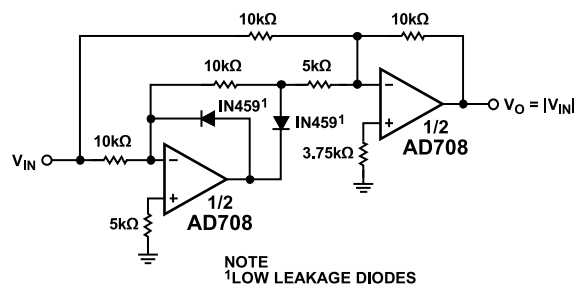


Figure 31. Precision Absolute Value Circuit

## THEORY OF OPERATION

### PRECISION ABSOLUTE VALUE CIRCUIT

The AD708 is ideally suited to the precision absolute value circuit shown in Figure 31. The low offset voltage match of the AD708 enables this circuit to accurately resolve the input signal. In addition, the tight offset voltage drift match maintains the resolution of the circuit over the full military temperature range. The high DC open-loop gain and exceptional gain linearity allows the circuit to perform well at both large and small signal levels.

In this circuit, the only significant DC errors are due to the offset voltage of the two amplifiers, the input offset current match of the amplifiers, and the mismatch of the resistors. Errors associated with the AD708S contribute less than 0.001% error over  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

Maximum error at  $25^{\circ}\text{C}$

$$\frac{50\ \mu\text{V} + (10\ \text{k}\Omega)(1\ \text{nA})}{10\ \text{V}} = 60\ \mu\text{V}/10\ \text{V} = 6\ \text{ppm}$$

Maximum error at  $+125^{\circ}\text{C}$  or  $-55^{\circ}\text{C}$

$$\frac{50\ \mu\text{V} + (2\ \text{nA})(10\ \text{k}\Omega)}{10\ \text{V}} = 7\ \text{ppm} @ +125^{\circ}\text{C}$$

Figure 32 shows  $V_{\text{OUT}}$  vs.  $V_{\text{IN}}$  for this circuit with a  $\pm 3\ \text{mV}$  input signal at 0.05 Hz. Note that the circuit exhibits very low offset at the zero crossing. This circuit can also produce  $V_{\text{OUT}} = -|V_{\text{IN}}|$  by reversing the polarity of the two diodes.

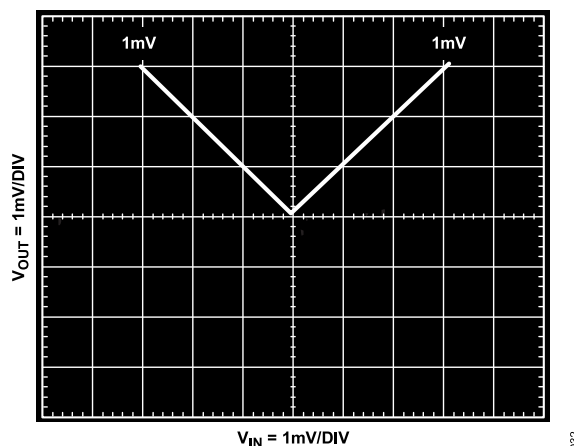


Figure 32. Absolute Value Circuit Performance (Input Signal = 0.05 Hz)

### SELECTION OF PASSIVE COMPONENTS

Use high quality passive components to take full advantage of the high precision and low drift characteristics of the AD708. Discrete resistors and resistor networks with temperature coefficients of less than 10 ppm/ $^{\circ}\text{C}$  are available from Vishay, Caddock, Precision Replacement Parts (PRP), and others.

**OUTLINE DIMENSIONS**

| Package Drawing (Option) | Package Type | Package Description                              |
|--------------------------|--------------|--------------------------------------------------|
| N-8                      | PDIP         | 8-Lead Plastic Dual In-Line Package, Narrow Body |
| Q-8                      | CERDIP       | 8-Lead Ceramic Dual In-Line Package              |

For the latest package outline information and land patterns (footprints), go to [Package Index](#).

**ORDERING GUIDE**

| Model <sup>1</sup> | Temperature Range | Package Description                          | Package Option |
|--------------------|-------------------|----------------------------------------------|----------------|
| AD708JNZ           | 0°C to +70°C      | 8-Lead Plastic Dual In-Line Package [PDIP]   | N-8            |
| AD708AQ            | -40°C to +85°C    | 8-Lead Ceramic Dual In-Line Package [CERDIP] | Q-8            |
| AD708BQ            | -40°C to +85°C    | 8-Lead Ceramic Dual In-Line Package [CERDIP] | Q-8            |
| AD708SQ/883B       | -55°C to +125°C   | 8-Lead Ceramic Dual In-Line Package [CERDIP] | Q-8            |

<sup>1</sup> Z = RoHS Compliant Part.

**Legal Terms and Conditions**

Information furnished by Analog Devices is believed to be accurate and reliable "as is". However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners. All Analog Devices products contained herein are subject to release and availability.