

## Four-Output Mini PMICs for Camera Applications

**MAX25249/MAX25249B**

### General Description

The MAX25249/MAX25249B are high-efficiency, four-output PMICs that integrate three DC-DC converters and a high-PSRR LDO, with OV/UV monitoring on all outputs. OUT1 is a 1A high-voltage synchronous step-down converter operating from power over coax or car battery. The OUT2 and OUT3 low-voltage synchronous step-down converters operate from OUT1 and provide a 0.8V to 3.9875V output voltage range. OUT2 can deliver 1.2A for high-megapixel cameras and high-speed serializers. OUT3 can deliver 1.2A to power the secondary rails of the imager, serializer, and MCU. OUT4 is a low-voltage, low-noise, high-PSRR LDO for imager power. All buck converters achieve  $\pm 1.5\%$  output voltage accuracy over load, line, and temperature range. Overvoltage and undervoltage faults are monitored with  $\pm 1.3\%$  accuracy around the set voltage, and errors are communicated through RESET.

The devices feature a 2.2MHz fixed-frequency PWM mode for better noise immunity and load-transient response. The high-frequency operation allows for the use of all ceramic capacitors and minimizes external components. The programmable spread-spectrum frequency modulation minimizes radiated electromagnetic emissions. Integrated low-RDS(ON) switches improve efficiency at heavy loads and make layout simpler than discrete solutions. Sequencing through the use of EN23 and EN4 pins and factory-settable output voltages increases flexibility for different image sensors and configurations. Other features include soft-start, overcurrent, and overtemperature protections. The MAX25249/MAX25249B are compliant with ASIL B ratings and are specified for operation over the  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  automotive temperature range.


### Applications

- Surround-View Cameras
- Rear-View Cameras

### Benefits and Features

- Multiple Functions for Small Size
  - 1A Synchronous High-Voltage Buck Converter
    - Input Voltage Range 5V to 36V
    - 3V to 4V in 50mV Steps
    - 5V Fixed Output Voltage
  - Two Synchronous Low-Voltage Buck Converters
    - OUT2 and OUT3 Provide up to 1.2A
    - 0.8V to 3.9875V in 12.5mV Steps
  - LDO for Camera Sensor; 50dB at 1kHz
  - 2.2MHz Operation
  - RESET Output – Push Pull or Open Drain
- High Precision
  - $\pm 1.5\%$  Output Voltage Accuracy
  - $\pm 1.3\%$  OV/UV Monitoring Accuracy
- Diagnostics and Features
  - ASIL B Compliant
  - Redundant Reference
- Robust for the Automotive Environment
  - Current-Mode, Forced-PWM Operation
  - Overtemperature and Short-Circuit Protection
  - 3.5mm x 3.5mm, 20-Pin TQFN
  - $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  Grade 1 Automotive Temperature Range
  - AEC-Q100 Qualified

### Simplified Block Diagram

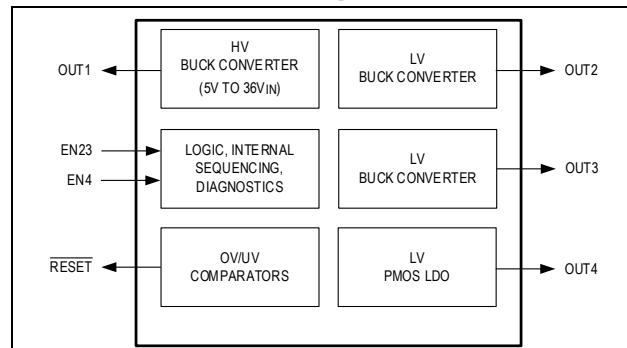

*[Ordering Information](#) appears at end of data sheet.*

Visit [Web Support](#) to complete the nondisclosure agreement (NDA) required to receive additional product information.

