



REVISIONS		
REV	DESCRIPTION	APPR DATE

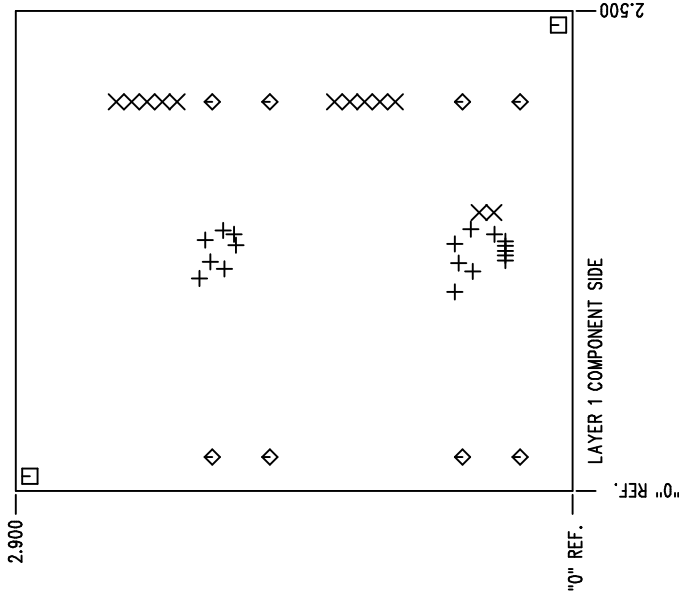

- 4 LAYERS:
- LAYER 1 COMPONENT SIDE
 - LAYER 2 GND1, GND2
 - LAYER 3 GND1, GND2
 - LAYER 4 SOLDER SIDE
- NOTES :
1. MATERIAL : FR4 OR EQUIVALENT EPOXY, 2 OZ. COPPER CLAD
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS
 2. FINISH : ALL PLATED HOLES .001 MIN. / .0015 MAX. COPPER PLATE
ELECTRODEPOSITED TIN-LEAD COMPOSITION
BEFORE REFLOW , SOLDER MASK OVER BARE COPPER (SNOBC)
 3. SOLDER MASK : BOTH SIDES USING LPI OR EQUIVALENT
 4. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK
 5. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
 6. ALL DIMENSIONS ARE IN INCHES
 7. SCORING:



Fabrication Drawing

APPROVALS			LINEAR TECHNOLOGY		
DRAWN	INIT	DATE	1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900		
CHECK					
DESIGN	KML/LS	7/18/00	TITLE: 2W SYNCHRONOUS BOOST REGULATOR		
ENGR					
SCALE = NONE			SIZE A	DEMO BRD DC308A	REV. A1
			DES- 0000		SHT 1 of 1