


FAB Drawing

| SIZE | QTY | SYM | PLATED | TOL |
|-------|-----|----------------|--------|----------|
| 0.187 | 4 | + | YES | +/-0.003 |
| 0.035 | 25 | X | YES | +/-0.003 |
| 0.063 | 17 | □ | YES | +/-0.003 |
| 0.04 | 20 | ◇ | YES | +/-0.003 |
| 0.01 | 178 | ⊗ | YES | +/-0.003 |
| 0.07 | 2 | ⊗ | NO | +/-0.003 |
| 0.125 | 2 | ⊕ ^A | YES | +/-0.003 |
| 0.047 | 15 | ⊕ ^B | YES | +/-0.003 |
| 0.12 | 2 | ⊕ ^C | YES | +/-0.003 |
| 0.1 | 1 | ⊕ ^D | YES | +/-0.003 |

| REVISIONS | | |
|-----------|-------------|------|
| REV | DESCRIPTION | DATE |
| | | |

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
2 OZ. COPPER FINISHED ON OUTER LAYERS.
1 OZ. COPPER FINISHED ON INNER LAYERS.
THICKNESS .062 +/-0.006 TOTAL OF 4 LAYERS.
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/-0.003 INCH IN RELATION TO CENTER
4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR RED.
5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
7. SCORING:

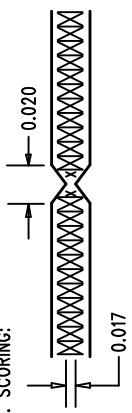

FAB DRAWING

| | | | | | | | |
|--------------|--------|-------------------|---|--|--|--|--|
| APPROVALS | | LINEAR TECHNOLOGY | | 1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900 | | | |
| DRAWN | INIT | DATE | TITLE: LTC1760CFW, Dual Smart Battery Charger Board | | | | |
| CHECK | JW | 04/26/11 | SIZE A | | | | |
| ENGR | J. Yee | 04/26/11 | REV. 1 | | | | |
| SCALE = NONE | | DC486B | | SHT 1 of 1 | | | |