


1. INSTALL SHUNTS AT PINS 1 AND 2 OF ALL HEADERS.

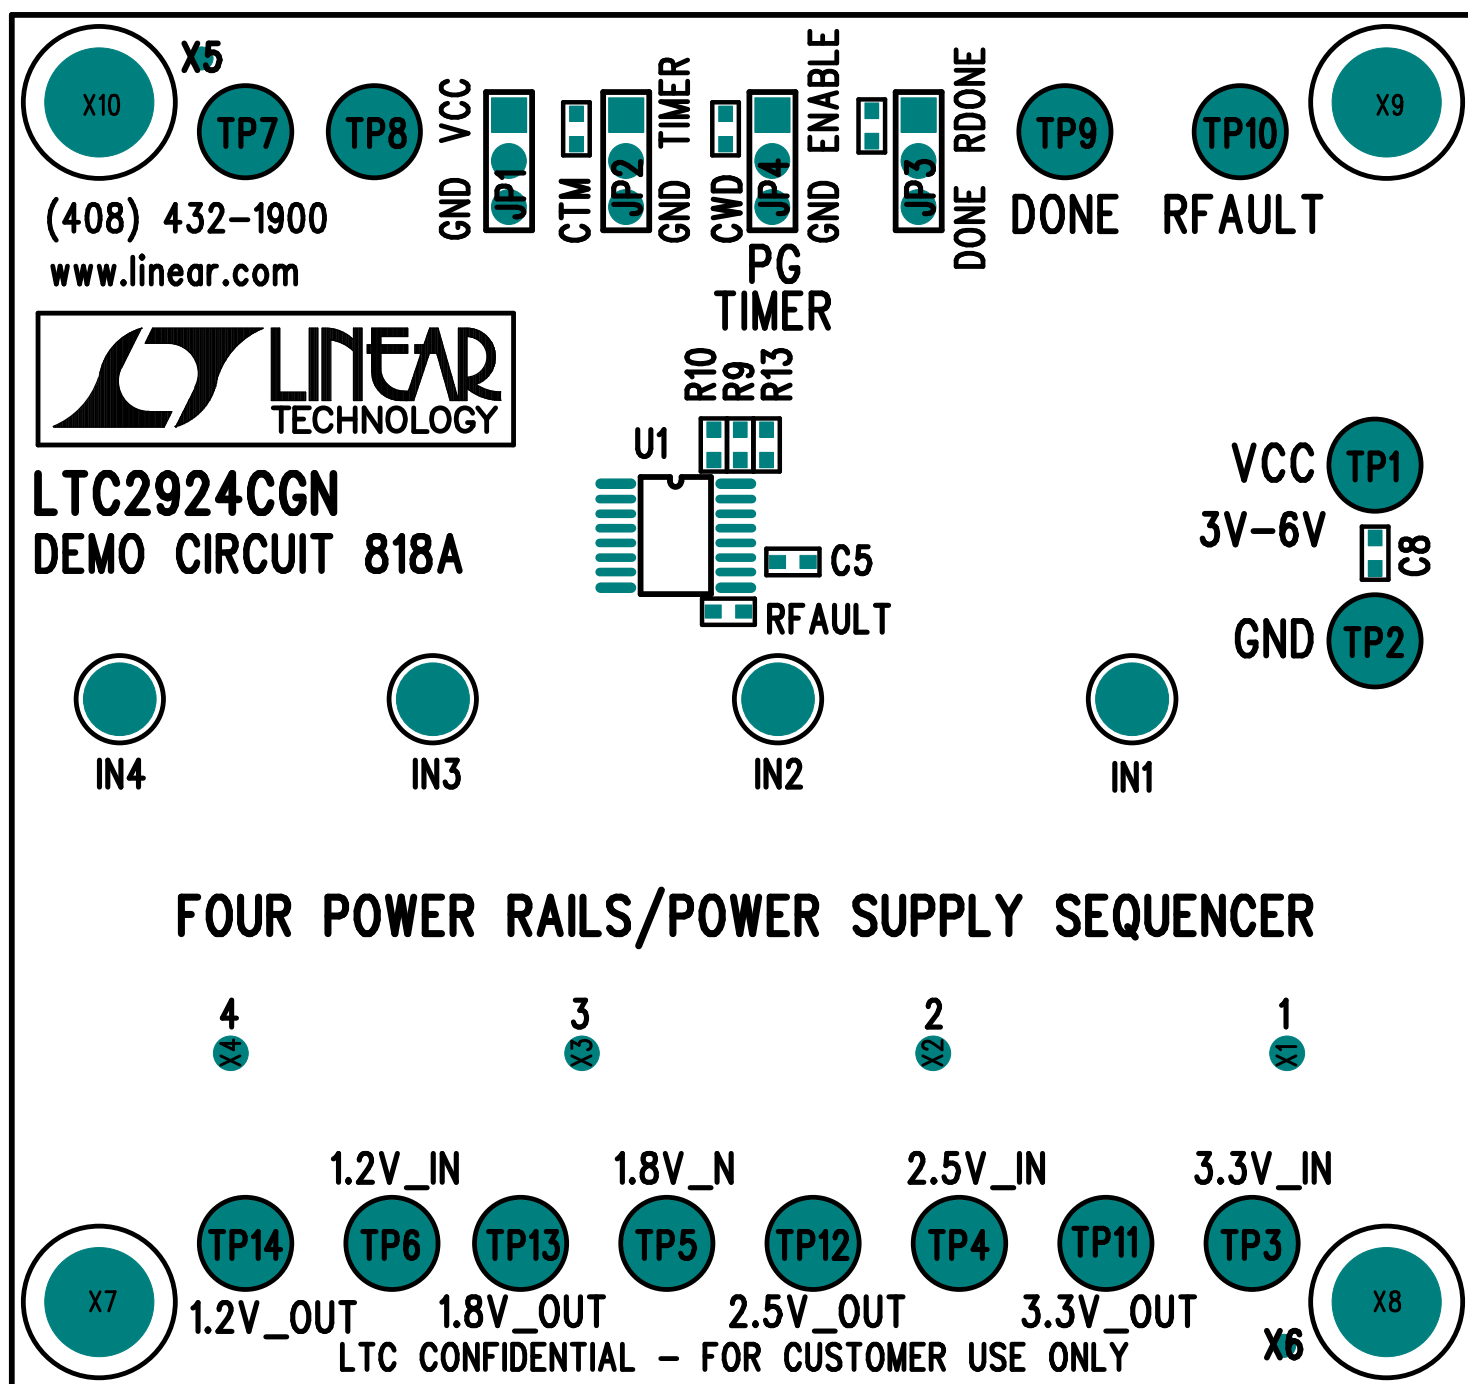

**LINEAR TECHNOLOGY CORPORATION**

DC818A REV 2  
04/04/05

TOP SILKSCREEN