

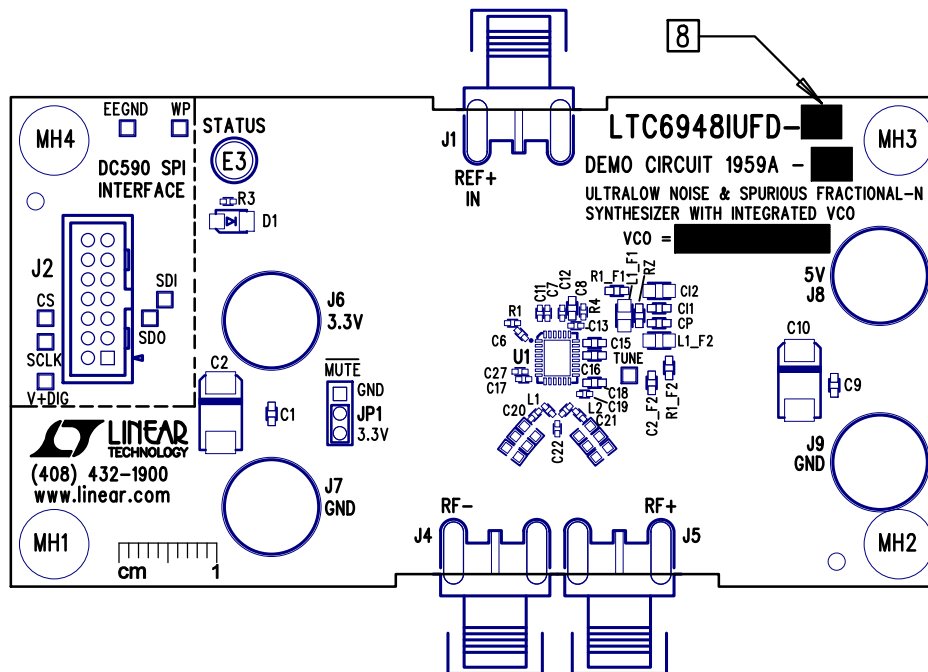


REVISION HISTORY				
ECO	REV	DESCRIPTION	APP. ENG.	DATE
-	2	PRODUCTION	MICHEL A.	01-24-14

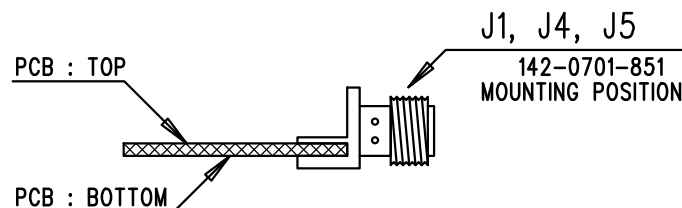

NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
2. ASSEMBLY PROCESS SHALL INCLUDE: REFLOW SOLDER TOP SIDE SMD. MAXIMUM SOLDER TEMPERATURE IS 240 DEGREES CELSIUS.
3. PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS. LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER. MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
4. INSTALL SHUNTS AS SHOWN ON ASSY DRAWING.
5. DEPANELIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
6. DO NOT APPLY ANY KIND OF ASSEMBLY STAMP OR QA STAMP TO ANY BOARD.
7. INSTALL CONNECTORS, TURRETS, STANDOFFS AS SHOWN BELOW:

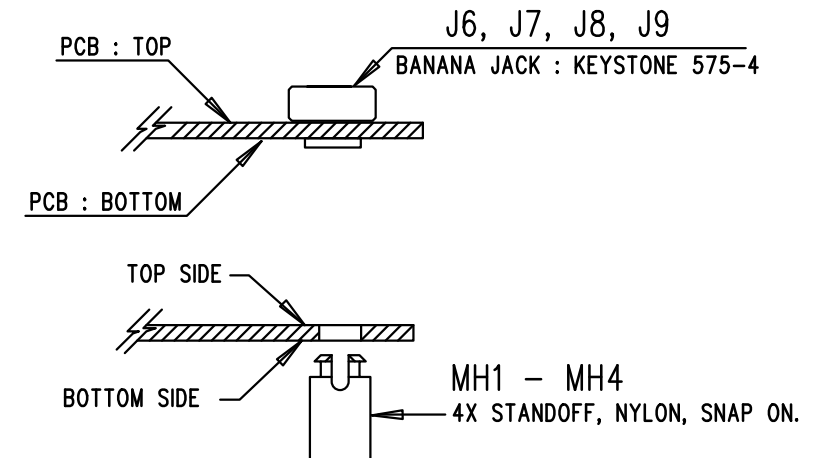

8. MARK EACH LTC PART NUMBER, ASSEMBLY TYPE AND VCO RANGE WITH BLACK PERMANENT MARKER AS SHOWN IN TABLE BELOW:

ASSY	U1	VCO
DC1959A-A	LTC6948IUFD-1	2.24 TO 3.74 GHz
DC1959A-B	LTC6948IUFD-2	3.08 TO 4.91 GHz
DC1959A-C	LTC6948IUFD-3	3.84 TO 5.79 GHz
DC1959A-D	LTC6948IUFD-4	4.20 TO 6.39 GHz

APPROVALS		 1630 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)432-1900 www.linear.com LTC CONFIDENTIAL- FOR CUSTOMER USE ONLY		
PCB DES.	KIM T.			
APP ENG.	MICHEL A.	TITLE: TOP ASSEMBLY DRAWING		
		ULTRALOW NOISE & SPURIOUS FRACTIONAL-N SYNTHESIZER WITH INTEGRATED VCO		
		SIZE N/A	IC NO. LTC6948IUFD-1/-2/-3/-4	REV. 2
SCALE = NONE		FILENAME: DC1959A-2.PCB		SHT 1 OF 2