



REVISION HISTORY				
ECO	REV	DESCRIPTION	APPR	DATE
-	2	PRODUCTION FAB	GEORGE B.	10-2-15

LAYER STRUCTURE

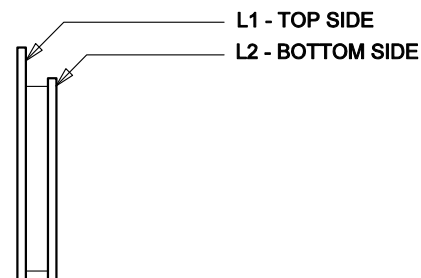



NOTES: UNLESS OTHERWISE SPECIFIED

- FAB PER IPC-A-600. CLASS 2.
- MATERIAL: -LEAD FREE ASSEMBLY COMPLIANT, ISOLA FR-370HR OR EQUIVALENT.
-FINISHED THICKNESS TO BE 0.062" +/- .005"
-TOTAL OF 2 LAYERS WITH .5 OZ. Cu ON LAYERS 1 AND 2. .
-FLAMMABILITY RATING: 94 V-0 MINIMUM.
- SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00 ARE PRIMARY DATUMS.
- DRILLING: -DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, 0.001" THICK MIN.
-ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
-HOLE LOCATION TOLERANCES ARE +/-0.003" IN RELATION TO CENTER
- FINISH: -SMOBC USING LPI BOTH SIDES, COLOR GREEN, NO TENT.
-GOLD IMMERSION BOTH SIDES.
(LEAD FREE SOLDER CAN BE USED FOR PROTOTYPE)
-FOR SILKSCREEN: BOTH SIDES USE WHITE NON-CONDUCTIVE INK.
- DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
PAD SIZE CAN BE MODIFIED TO MEET END FINISH.
- PCBS ARE TO BE RoHS COMPLIANT.



SIZE	QTY	SYM	PLATED	TOL
0.11811	4	+	NO	+/-0.003
0.07	2	×	NO	+/-0.003
0.063	2	□	YES	+/-0.003
0.015	3	◇	YES	+/-0.003
0.02	2	⊗	YES	+/-0.003
0.02559 x 0.05512	2	⊗	YES	+/-0.003

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON ANGLE ±1 0.XX" = ±0.01" 0.XXX" = ±0.005" INTERPRET DIM AND TOL PER ASME Y14.5M-1994 THIRD ANGLE PROJECTION 	APPROVALS		 LINEAR TECHNOLOGY	1630 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)432-1900 www.Linear.com LTC CONFIDENTIAL- FOR CUSTOMER USE ONLY			
	PCB DES.	NC					
	APP ENG.	GEORGE B.					
TITLE: FABRICATION DRAWING: SINGLE SWITCH TRANSMITTER FOR LTC4123							
			SIZE N/A		IC NO. LTC4123 DEMO CIRCUIT 2301A	REV. 2	
DO NOT SCALE DRAWING			SCALE: NONE			FILENAME: DC2301A-2.PCB	SHT 1 of 1