

## General Description

The MAX20310 evaluation kit (EV kit) is a fully assembled and tested circuit for evaluating the MAX20310 medical wearable, power-management solution with I<sup>2</sup>C capability for low-power medical applications. The device includes a voltage monitor multiplexer, a button monitor, a single-inductor, multiple-output (SIMO) buck-boost regulator, and two low-dropout (LDO) linear regulators.

Refer to the MAX20310 IC data sheet for detailed information regarding the operation and features of the devices.

## Features

- RoHS Compliant
- Proven PCB Layout
- Fully Assembled and Tested
- I<sup>2</sup>C Serial Interface
- Multiple Inductor Options Included

Ordering Information appears at end of data sheet.

## Quick Start

### Required Equipment

Before beginning, the following equipment is needed:

- MAX20310 EV kit
- Power supply capable of supplying +0.8V to +2.0V
- Digital multimeter (DMM)
- I<sup>2</sup>C master device

### Procedure

The EV kit is fully assembled and tested. Follow the steps below to verify board operation:

- 1) Connect the positive terminal of the power supply to GND and the common terminal to BATN (Note 1).
- 2) Pull the  $\overline{KIN}$  pin to BATN until the device wakes up (400ms (typ)).
- 3) Use the DMM to measure the voltage at B1OUT and verify that it is 1.8V.
- 4) Use the I<sup>2</sup>C master to configure the MAX20310 as desired.

## Detailed Description of Hardware

The MAX20310 evaluation kit (EV kit) evaluates the MAX20310 medical wearable, power-management solution. The device is optimized for low-voltage applications and operates on battery voltages from 0.8V to 2.0V. The EV kit breaks out all device bumps for ease of measurement.

### Negative Supply

The MAX20310 requires a negative power supply configuration. Therefore, the positive terminal of a battery or power supply connects to GND and the negative terminal connects to BATN. There is no reverse-battery protection on the MAX20310 EV kit, so users are strongly advised to verify power connections before connecting a battery or turning on a supply.

**Note 1:** MAX20310 is powered by a negative supply. See Detailed Description.

## Inductors

All four of the MAX20310's voltage rails are generated by a single-inductor, multiple-output (SIMO) buck-boost regulator. In order to provide maximum flexibility in evaluating the MAX20310 and selecting an inductor, this

EV kit contains several inductors of different values and from different suppliers. [Table 1](#) provides the part numbers, manufacturers, and values of the included inductors.

See [Table 2](#) and [Table 3](#) for pin descriptions of connectors J1 and J2.

**Table 1. Inductors**

| INSTALLED | VALUE (MH) | SIZE (METRIC)     | MANUFACTURER PART NUMBER | MANUFACTURER |
|-----------|------------|-------------------|--------------------------|--------------|
| Yes       | 1.5        | 2016, 1.0mm thick | DFE201610E-1R5M=P2       | Murata       |
| No        | 4.7        | 2520, 1.0mm thick | DFE252010F-4R7M=P2       | Murata       |
| No        | 3.3        | 2520, 1.0mm thick | DFE252010F-3R3M=P2       | Murata       |
| No        | 2.2        | 2016, 1.0mm thick | DFE201610E-2R2M          | Murata       |
| No        | 4.7        | 2016, 1.0mm thick | DFE201610E-4R7M=P2       | Murata       |
| No        | 6.8        | 2520, 1.0mm thick | DFE252010F-6R8M=P2       | Murata       |
| No        | 1          | 2010, 1.0mm thick | SRP2010-1R0M             | Bourns       |

**Table 2. Connector J1**

| PIN | MAX20310                 | DESCRIPTION                               |
|-----|--------------------------|---|
| 1   | GND                      | Ground                                    |
| 2   | MON                      | Voltage Monitor Output                    |
| 3   | MPC                      | Multipurpose Control Input                |
| 4   | SDA                      | I <sup>2</sup> C Serial Data Input/Output |
| 5   | $\overline{\text{KIN}}$  | Key Input                                 |
| 6   | SCL                      | I <sup>2</sup> C Serial Clock Input       |
| 7   | $\overline{\text{KOUT}}$ | Key Output                                |
| 8   | $\overline{\text{RST}}$  | Power-On Reset Output                     |
| 9   | MPO                      | Multipurpose Output                       |
| 10  | GND                      | Ground                                    |

**Table 3. Connector J2**

| PIN | SIGNAL | DESCRIPTION                |
|-----|--------|----------------------------|
| 1   | GND    | Ground                     |
| 2   | L2OUT  | LDO2 Output                |
| 3   | L1OUT  | LDO1 Output                |
| 4   | CAP    | Internal Supply Decoupling |
| 5   | B1OUT  | SIMO Output 1              |
| 6   | B2OUT  | SIMO Output 2              |
| 7   | LX     | Inductor Switch Connection |
| 8   | BATN   | Battery Negative Terminal  |
| 9   | GND    | Ground                     |

## Component Suppliers

| SUPPLIER        | WEBSITE  |
|-----------------|--|
| Bourns Inc.     | <a href="http://www.bourns.com">www.bourns.com</a>               |
| Murata Americas | <a href="http://www.murata.com">www.murata.com</a>               |
| TDK Corp        | <a href="http://www.component.tdk.com">www.component.tdk.com</a> |

**Note:** Indicate that you are using the MAX20310EVKIT when contacting these component suppliers.

## Ordering Information


| PART           | TYPE   |
|----------------|--------|
| MAX20310EVKIT# | EV Kit |

#Denotes RoHS compliant.

MAX20310 EV Kit Bill of Materials


| ITEM  | REF_DES | DNI/DNP | QTY | MFG PART #  | MANUFACTURER                                  | VALUE     | DESCRIPTION  | COMMENTS                |
|-------|---------|---------|-----|---|---|-----------|--|-------------------------|
| 1     | C1, C2  | -       | 2   | JMK105BBJ475MMV-F;<br>C1005X5R0J475M050BC                                     | TAIYO YUDEN; TDK                              | 4.7UF     | CAPACITOR; SMT (0402); CERAMIC CHIP; 4.7UF; 6.3V; TOL=20%; TC=-55 DEGC TO +85 DEGC; TC=X5R                 |                         |
| 2     | C3, C6  | -       | 2   | GRM155R60J106ME44;<br>C1005X5R0J106M050BC;<br>CL05A106M050NUN; C0402C106M9PAC | MURATA; TDK;<br>SAMSUNG ELECTRONICS;<br>KEMET | 10UF      | CAPACITOR; SMT (0402); CERAMIC CHIP; 10UF; 6.3V; TOL=20%; TC=-55 DEGC TO +85 DEGC; TC=X5R                  |                         |
| 3     | C4, C5  | -       | 2   | C1608X5R0J226M080AC   | TDK   | 22UF      | CAPACITOR; SMT (0603); CERAMIC CHIP; 22UF; 6.3V; TOL=20%; MODEL=C SERIES; TG=-55 DEGC TO +85 DEGC;         |                         |
| 4     | C7      | -       | 1   | C0603C104K3RAC;<br>GRM188R71E104KA01;<br>C1608X7R1E104K                       | KEMET/MURATA/TKD                              | 0.1UF     | CAPACITOR; SMT; 0603; CERAMIC; 0.1uF; 25V; 10%; X7R; -55degC to +125degC; +/-15% from -55degC to +125degC; |                         |
| 5     | J1      | -       | 1   | PBC10SAAN   | SULLINS ELECTRONICS CORP.                     | PBC10SAAN | CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 10PINS; -65 DEGC TO +125 DEGC                          |                         |
| 6     | J2      | -       | 1   | PBC09SAAN   | SULLINS ELECTRONICS CORP                      | PBC09SAAN | CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 9PINS; -65 DEGC TO +125 DEGC                           |                         |
| 7     | L1      | *       | 1   | DFF201610E-1R5M=P2  | MURATA  | 1.5UH     | INDUCTOR; SMT (0806); MAGNETICALLY SHIELDED; 1.5UH; TOL=+/-20%; 2.1A;                                      |                         |
| 8     | U1      | -       | 1   | MAX20310  | MAXIM   | MAX20310  | EVKIT PART IC; PACKAGE OUTLINE: 16 BUMPS WLP PKG. 0.40MM PITCH; 21-0491; W161F1+1                          |                         |
| 9     | L1      | DNI     | 1   | DFF252010F-4R7M=P2  | MURATA  | 4.7UH     | INDUCTOR; SMT (1008); MAGNETICALLY SHIELDED; 4.7UH; TOL=+/-20%; 1.4A                                       | (Alternate part for L1) |
| 10    | L1      | DNI     | 1   | DFF252010F-3R3M=P2  | MURATA  | 3.3UH     | INDUCTOR; SMT (1008); MAGNETICALLY SHIELDED; 3.3UH; TOL=+/-20%; 1.6A                                       | (Alternate part for L1) |
| 11    | L1      | DNI     | 1   | DFF201610E-2R2M   | MURATA  | 2.2UH     | INDUCTOR; SMT (2016); METAL ALLOY CHIP; 2.2UH; TOL=+/-20%; 2.6A  | (Alternate part for L1) |
| 12    | L1      | DNI     | 1   | DFF201610E-4R7M=P2  | MURATA  | 4.7UH     | INDUCTOR; SMT (2016); METAL ALLOY CHIP; 4.7UH; TOL=+/-20%; 1.3A  | (Alternate part for L1) |
| 13    | L1      | DNI     | 1   | DFF252010F-6R8M=P2  | MURATA  | 6.8UH     | INDUCTOR; SMT (1008); MAGNETICALLY SHIELDED; 6.8UH; TOL=+/-20%; 1.1A                                       | (Alternate part for L1) |
| 14    | L1      | DNI     | 1   | SRP2010-1R0M  | BOURNS  | 1UH       | INDUCTOR; SMT (0806); MAGNETICALLY SHIELDED; 1UH; TOL=+/-20%; 2.6A   | (Alternate part for L1) |
| 15    | R1      | DNP     | 0   | CRCW04020000ZS  | VISHAY DALE                                   | 0         | RESISTOR; 0402; 0 OHM; 0% JUMPER; 0.063W; THICK FILM;  |                         |
| 16    | PCB     | -       | 1   | MAX20310  | MAXIM   | PCB       | PCB Board:MAX20310 EVALUATION KIT  |                         |
| TOTAL |         |         | 18  |   |   |           |  |                         |

MAX20310 EV Kit Schematic

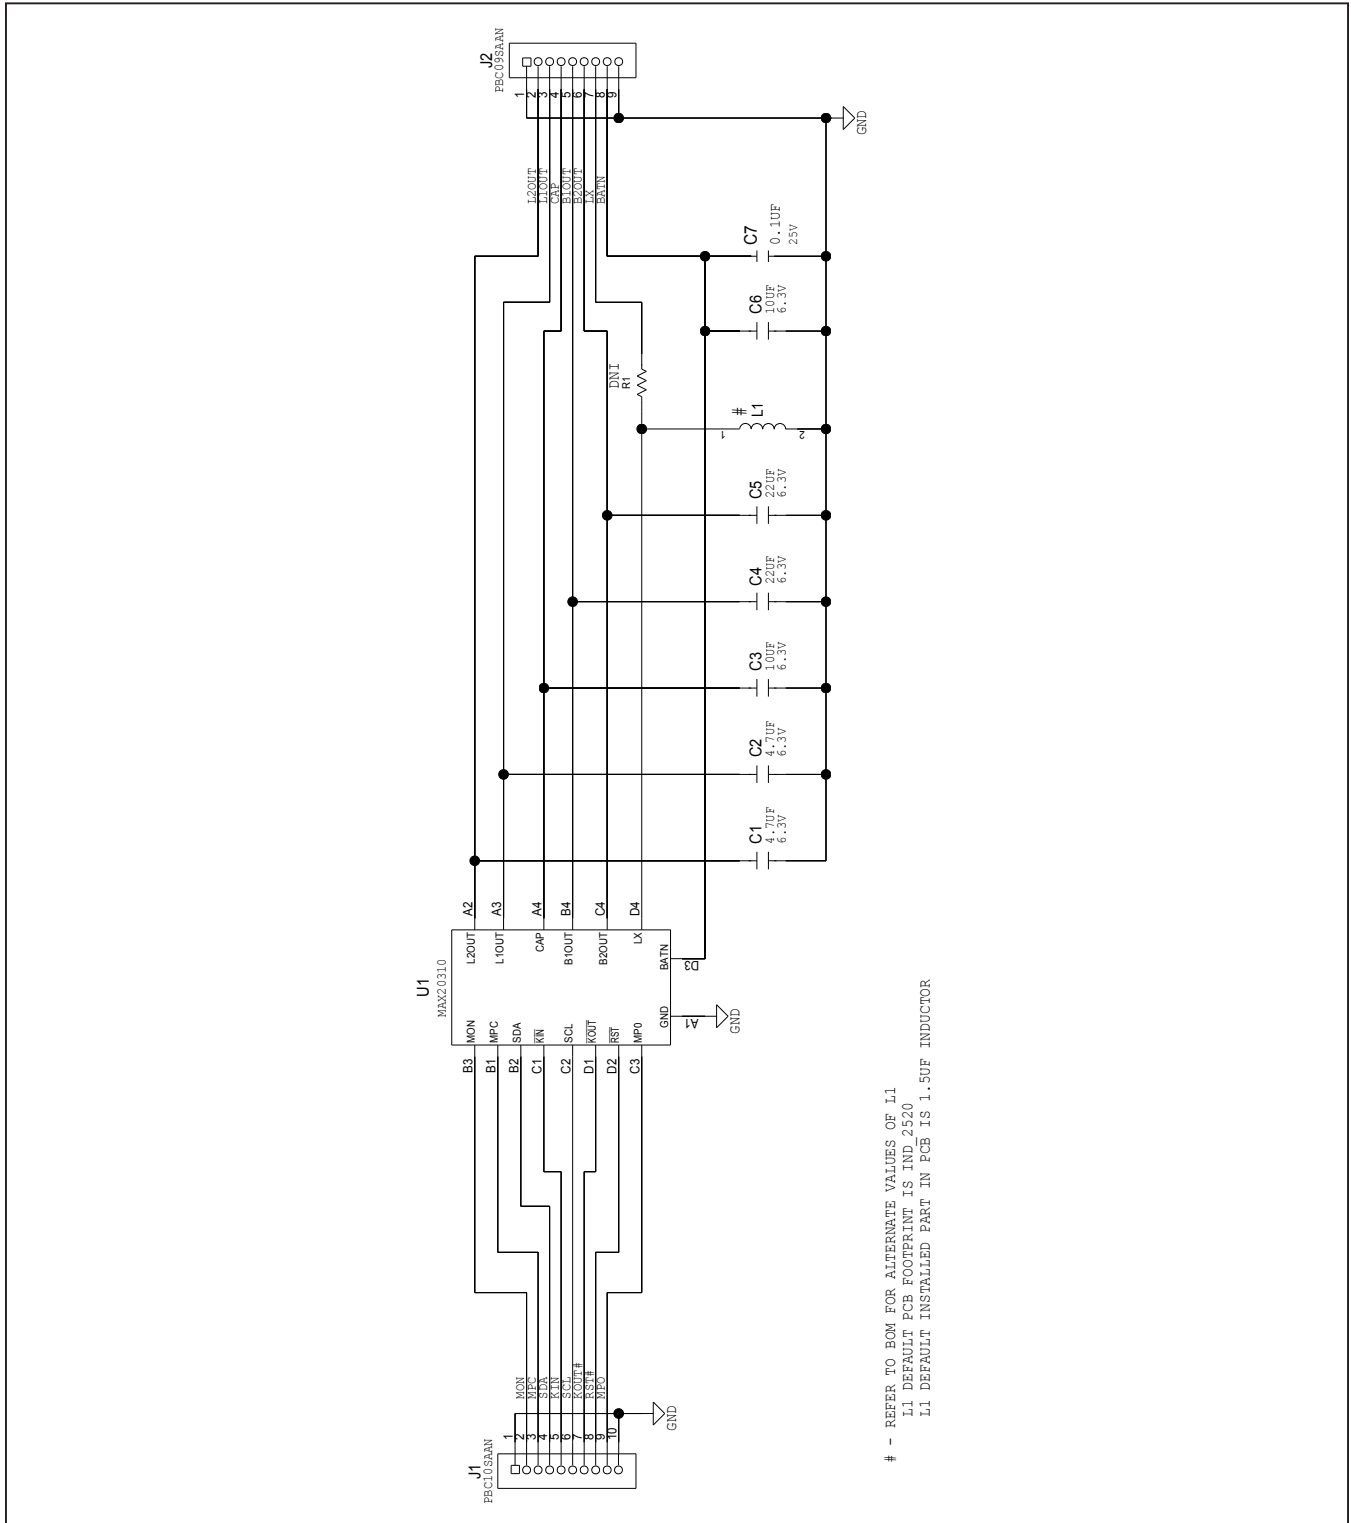


# - REFER TO BOM FOR ALTERNATE VALUES OF L1  
 L1 DEFAULT PCB FOOTPRINT IS IND.2520  
 L1 DEFAULT INSTALLED PART IN PCB IS 1.5UF INDUCTOR


MAX20310 EV Kit PCB Layout Diagrams

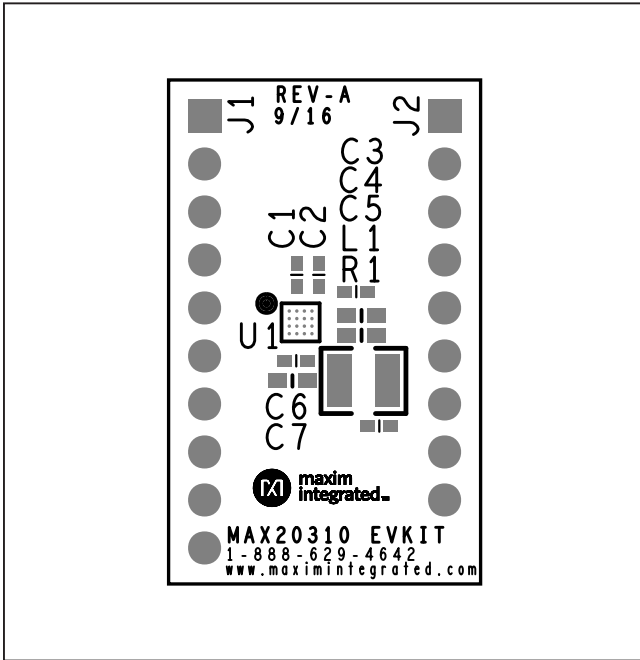

MAX20310 EV Kit—Top Silkscreen

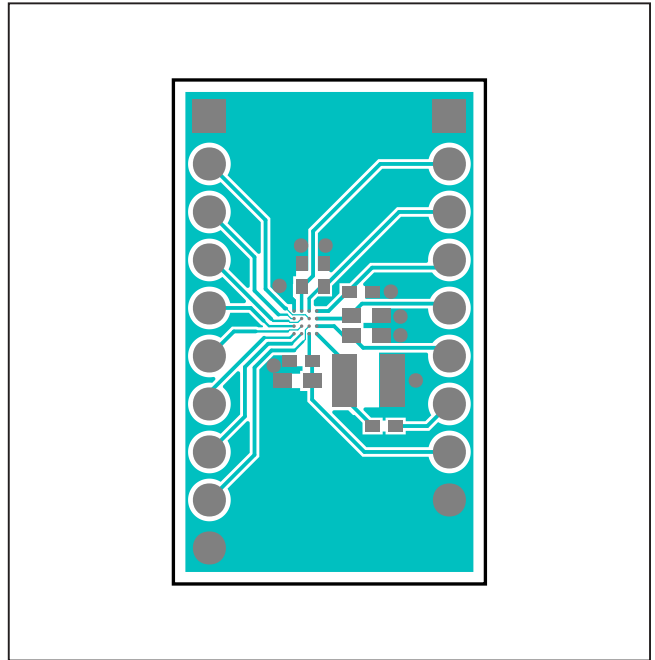


MAX20310 EV Kit—Top

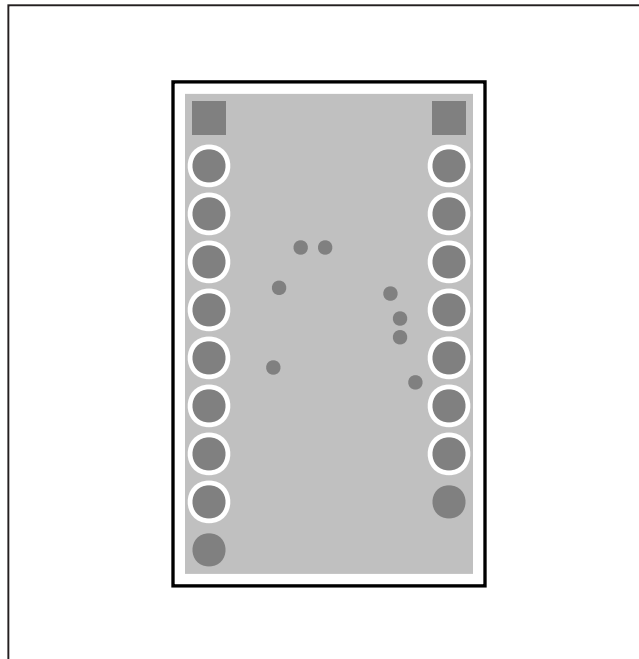


MAX20310 EV Kit—Layer 2 GND


MAX20310 EV Kit PCB Layout Diagrams (continued)

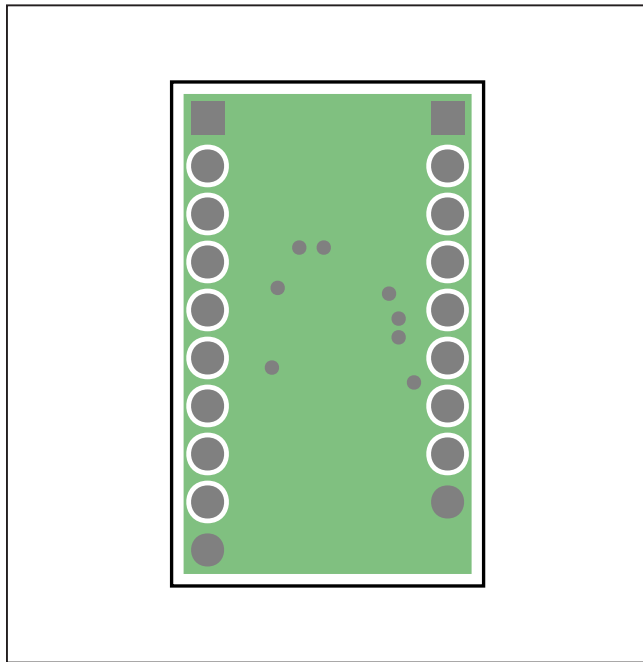

MAX20310 EV Kit—Layer 3 Power

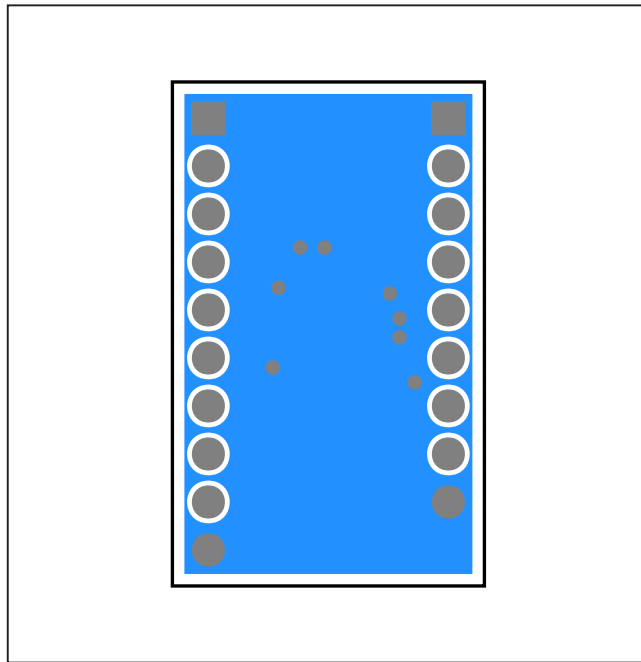

MAX20310 EV Kit—Bottom

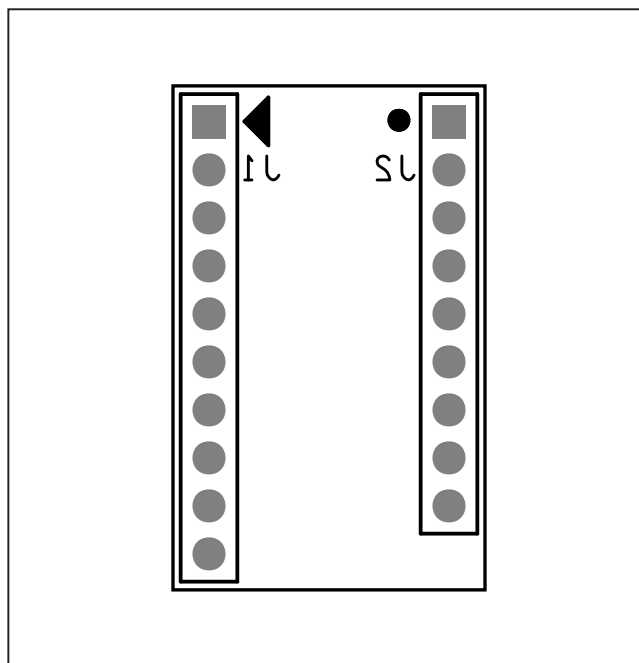

MAX20310 EV Kit—Bottom Silkscreen

## Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION     | PAGES CHANGED |
|-----------------|---------------|-----------------|---------------|
| 0               | 1/17          | Initial release | —             |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.*