

Click [here](#) to ask about the production status of specific part numbers.

MAX9716 Evaluation Kit

Evaluates: MAX9716/MAX9717A/B/C/D

General Description

The MAX9716 evaluation kit (EV kit) is a fully assembled and tested circuit board that uses the MAX9716, a low-cost, mono, 1.4W, bridge-tied-load (BTL) audio power amplifier with adjustable gain. Designed to operate from a 2.7V to 5.5V DC power supply, the EV kit is capable of delivering 1.4W into a 4Ω load with less than 1% THD+N.

The EV kit can be used to evaluate the MAX9717A/B/C/D. To evaluate the MAX9717A with the EV kit, replace the MAX9716 IC with a MAX9717A. To evaluate the MAX9717B/C/D with the EV kit, replace the MAX9716 IC with a MAX9717B/C/D, remove resistors R1 and R2, and short the R1 pads.

Features

- Single Power Supply: 2.7V to 5.5V
- 10nA (typ) IC Shutdown Current
- 1.4W into 4Ω at 1% THD+N
- 1.1W into 8Ω
- Resistor Adjustable Gain (MAX9716/MAX9717A)
- Surface-Mount Construction
- Fully Assembled and Tested

Ordering Information

| PART | TYPE |
|---------------|--------|
| MAX9716EVKIT# | EV Kit |

Note: To evaluate the MAX9717A/B/C/D, request a MAX9717AETA/MAX9717BETA/MAX9717CETA/MAX9717DETA free sample with the MAX9716 EV kit.

Component List

| DESIGNATION | QTY | DESCRIPTION |
|-------------|-----|--|
| C1 | 1 | 10μF ±20%, 6.3V X5R ceramic capacitor (0805) TDK C2012X5R0J106M |
| C2 | 1 | 0.1μF ±10%, 16V X7R ceramic capacitor (0603) TDK C1608X7R1C104K |
| C3 | 1 | 0.47μF ±20%, 10V tantalum capacitor (0402) AVX TACK474M010 |
| C4 | 1 | 1μF ±10%, 10V X5R ceramic capacitor (0603) TDK C1608X5R1A105K |
| C5 | 1 | 10μF ±20%, 6.3V tantalum capacitor (A case) AVX TAJA106M006 |

| DESIGNATION | QTY | DESCRIPTION |
|-------------|-----|--|
| JU1 | 1 | 4-pin header |
| JU2 | 1 | 3-pin header |
| OUT | 1 | 3.5mm SMT stereo headphone jack |
| R1, R2 | 2 | 10kΩ ±1% resistors (0603) |
| U1 | 1 | Audio power amplifier Maxim MAX9716ETA (8 TDFN) |
| U2 | 0 | Not installed, MAX9716EUA (8 μMAX®) |
| U3 | 0 | Not installed, MAX9716EBL (9 UCSP™) |
| — | 2 | Shunts |
| — | 1 | PCB: MAX9716/7 EVALUATION KIT |

μMAX is a registered trademark and UCSP is a trademark of Maxim Integrated Products, Inc.

Component Suppliers

| SUPPLIER | PHONE | WEBSITE |
|-----------------|--------------|-----------------------|
| AVX Corporation | 843-946-0238 | www.avxcorp.com |
| TDK Corp. | 847-803-6100 | www.component.tdk.com |

Note: Indicate that you are using the MAX9716/MAX9717 when contacting these component suppliers.



Quick Start

The MAX9716 EV kit is fully assembled and tested. Follow these steps to verify board operation. **Do not turn on the power supply until all connections are completed.**

Recommended Equipment

- 2.7V to 5.5V, 1A power supply
 - Audio source (i.e., CD player, cassette player)
 - 4Ω/8Ω speaker
 - Headphone with 3.5mm plug (MAX9717 only)
- 1) Verify that JU2 has a shunt across pins 1 and 2 (SHDN = high).
 - 2) Verify that JU1 has a shunt across pins 1 and 3 (IN+ = BIAS).
 - 3) Connect the speaker across OUT+ and OUT-.
 - 4) Connect the 5.0V power supply to the VCC pad and the power-supply ground to the GND pad.
 - 5) Connect the audio source to VIN- pad.
 - 6) Turn on the power supply, and then turn on the audio source.
 - 7) Plug in the headphone for the headphone mode (MAX9717 only).

Detailed Description

Jumper Selection

Jumper JU1 controls the IN+ pin (MAX9716) or $\overline{\text{BTL/SE}}$ pin (MAX9717). See [Table 1](#) for JU1 function.

Jumper JU2 controls the $\overline{\text{SHDN}}$ pin of the MAX9716/MAX9717 IC. See [Table 2](#) for JU2 functions.

Gain Settings (MAX9716/MAX9717A)

R1 and R2 set the gain of the EV kit. The EV kit comes with R1 and R2 equal to 10kΩ, setting the BTL gain to 2V/V. To change the output-voltage gain, choose R2 between 10kΩ to 50kΩ. The BTL output gain is determined by the following equation:

$$A_V = 2 \times (R2/R1)$$

where A_V is the desired BTL output-voltage gain.

For the MAX9717A, the gain of single-ended mode is set by $A_V = R2/R1$.

Evaluating MAX9717A/B/C/D

To evaluate the MAX9717A with the MAX9716 EV kit, replace the MAX9716ETA with a MAX9717AETA. Change jumper JU1 position according to [Table 1](#).

To evaluate the MAX9717B/C/D with the MAX9716 EV kit, replace the MAX9716ETA with a MAX9717BETA/MAX9717CETA/MAX9717DETA, remove input and feedback resistors R1 and R2, then short the R1 pads. The MAX9717B/C/D has internally fixed BTL gains of 6dB, 9dB, and 12dB, respectively. Change jumper JU1 position according to [Table 1](#).

Table 1. JU1 Functions

| JU1 SHUNT POSITION | IN+ PIN (MAX9716) | $\overline{\text{BTL/SE}}$ PIN (MAX9717) |
|------------------------|-------------------|--|
| Pins 1 and 2 | Not allowed | $\overline{\text{BTL/SE}} = V_{CC}$, single-ended output mode |
| Pins 1 and 3 (default) | IN+ = BIAS | Not allowed |
| Pins 1 and 4 | Not allowed | $\overline{\text{BTL/SE}} = \text{GND}$, BTL output mode |

Table 2. JU2 Functions

| JU2 SHUNT POSITION | $\overline{\text{SHDN}}$ PIN | EV KIT OUTPUT |
|------------------------|------------------------------|---------------|
| Pins 1 and 2 (default) | Connected to V_{CC} | Enabled |
| Pins 2 and 3 | Connected to GND | Disabled |

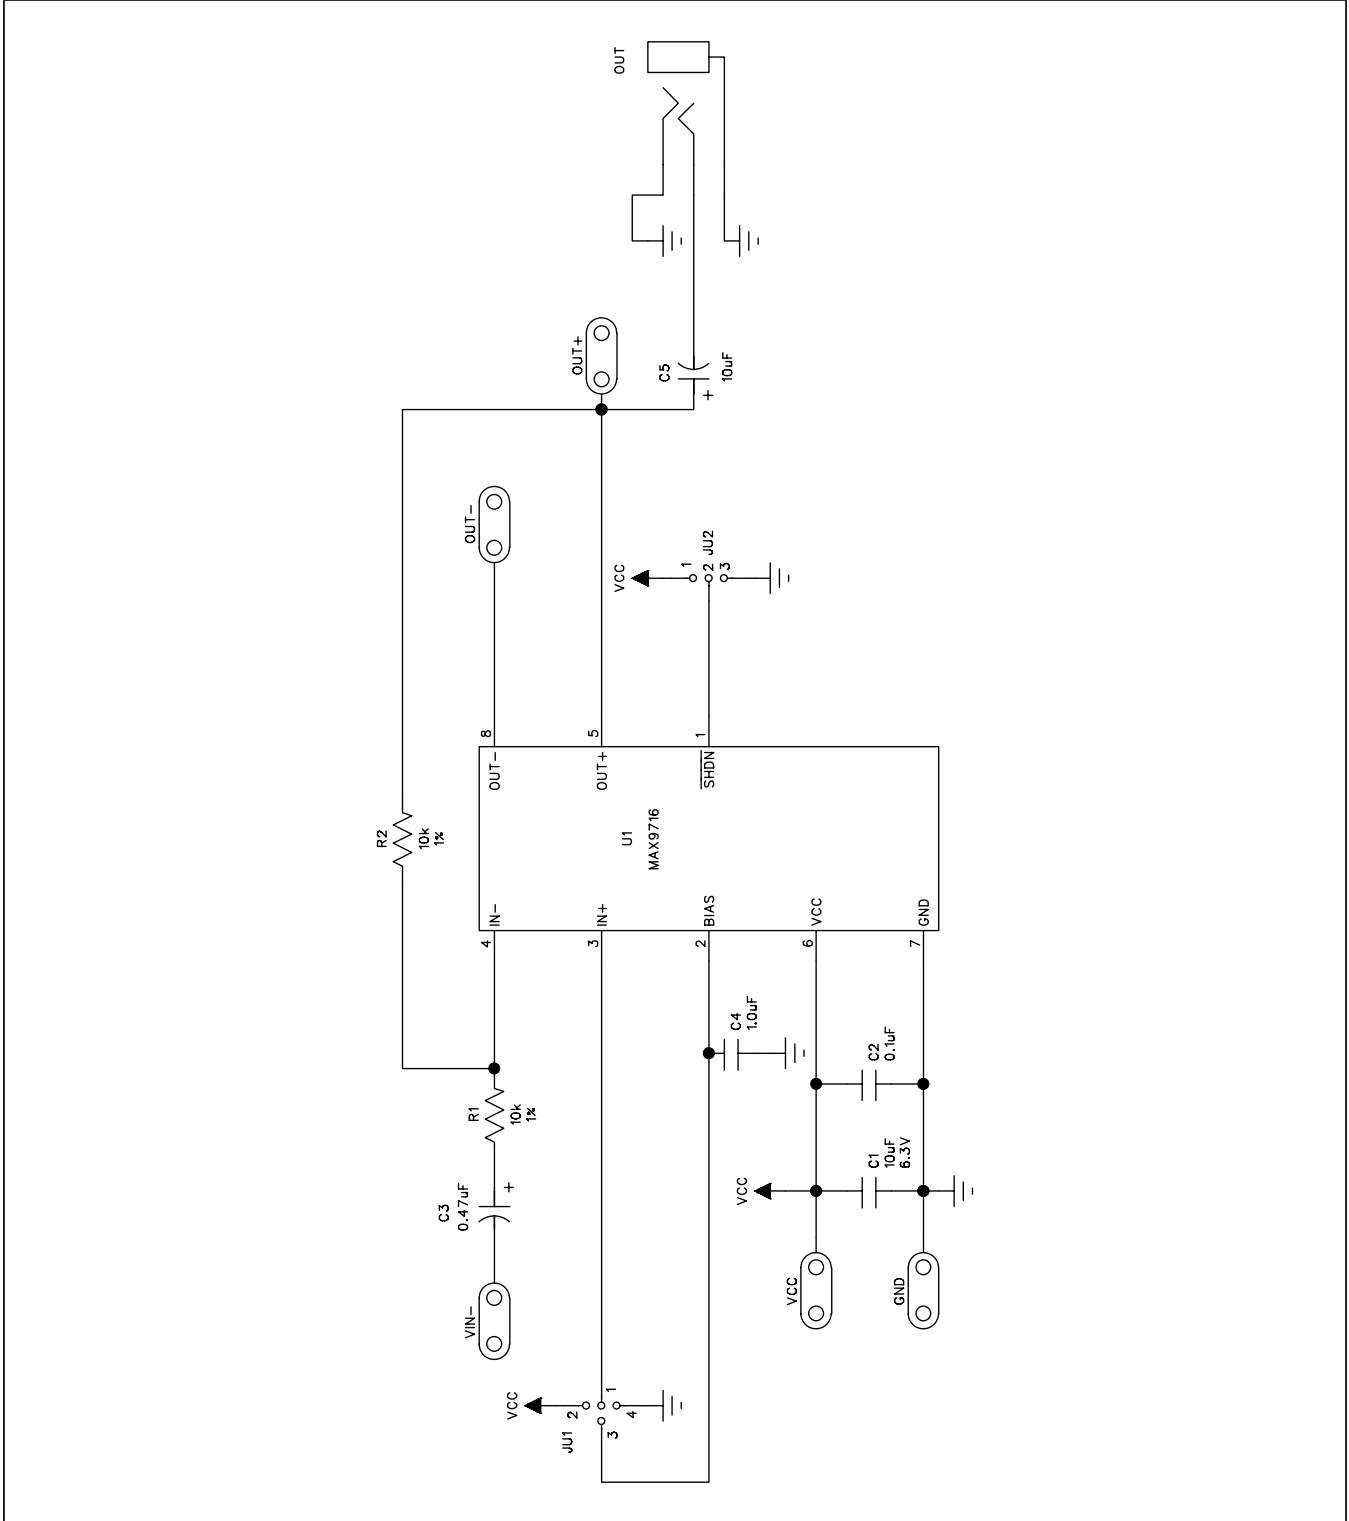


Figure 1. MAX9716 EV Kit Schematic

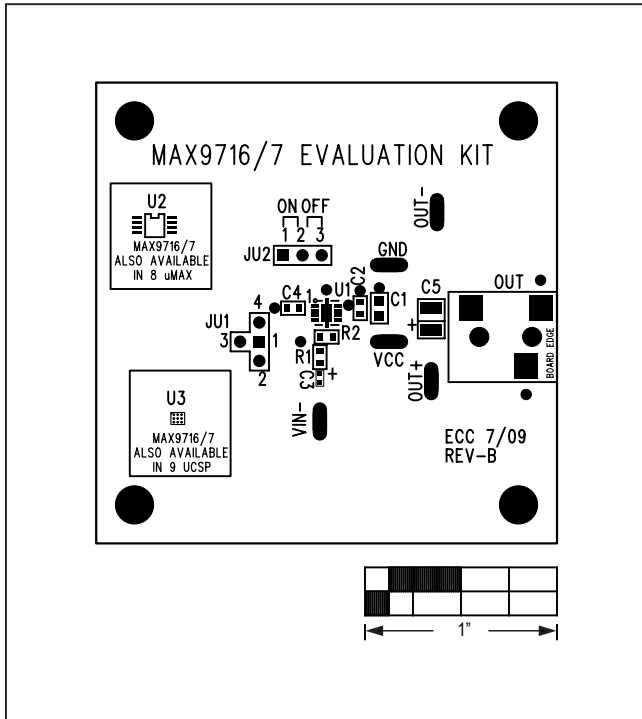


Figure 2. MAX9716 EV Kit Component Placement Guide—Component Side

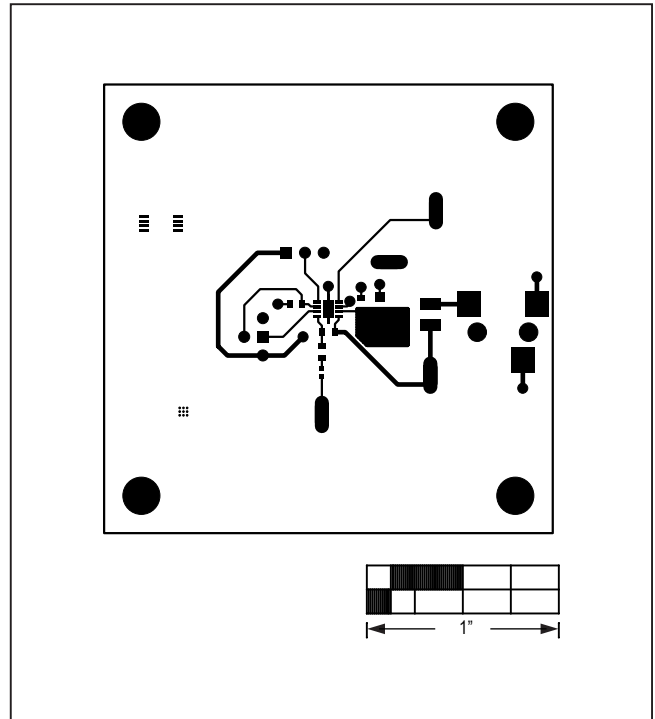


Figure 3. MAX9716 EV Kit PC Board Layout—Component Side

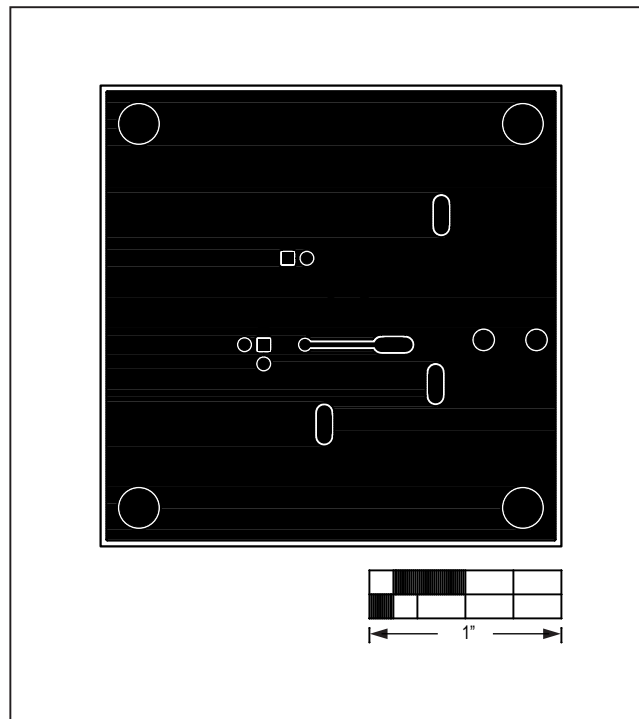


Figure 4. MAX9716 EV Kit PC Board Layout—Solder Side

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|---|---------------|
| 0 | 3/04 | Initial release | — |
| 1 | 8/09 | Updated figures | 3, 4 |
| 2 | 10/20 | Updated <i>Ordering Information</i> table | 1 |

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at <https://www.maximintegrated.com/en/storefront/storefront.html>.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.