

FEATURES

- ▶ Fully Compliant IEEE 802.3bt Type 3 2-Pair PSE
- ▶ Up to 48 PSE Ports with One Power Channel per Port
- ▶ +80V/–20V Tolerant Port-Facing Pins
- ▶ ECC-Protected eFlash and Data RAMs
- ▶ Industry-Leading Power Path Efficiency
 - ▶ 100mΩ Sense Resistance
 - ▶ 30mΩ or Lower MOSFET $R_{DS(ON)}$
- ▶ Chipset Provides Electrical Isolation
 - ▶ Eliminates Optos and Isolated 3.3V Supply
- ▶ Very High Reliability Multipoint PD Detection
- ▶ Continuous Voltage, Temperature, and Current Monitoring
- ▶ 1MHz I²C Compatible Serial Control Interface
- ▶ Pin or I²C Programmable PD Power
- ▶ Available in a 24-Lead 4mm × 4mm (LTC9101-2B) and 64-Lead 7mm × 11mm (LTC9102) QFN Packages

APPLICATIONS

- ▶ PoE PSE Switches/Routers and Midspans

TYPICAL APPLICATION

DESCRIPTION

The LTC[®]9101-2B/LTC9102 chipset is a 12-/24-/48-port power sourcing equipment (PSE) controller designed for use in IEEE 802.3bt-compliant Type 3 2-pair Power over Ethernet (PoE) systems. The LTC9101-2B/LTC9102 is designed to power compliant 802.3af, 802.3at, and 802.3bt PDs. The LTC9101-2B/LTC9102 chipset delivers lowest-in-industry heat dissipation by utilizing low $R_{DS(ON)}$ external MOSFETs and 0.1Ω sense resistance per power channel. A transformer-isolated communication protocol replaces expensive opto-couplers and a complex isolated 3.3V supply, resulting in significant BOM cost savings.

Advanced power management features include per-port 14-bit current/voltage monitoring, programmable power limits, and versatile fast shut down of preselected ports. PD detection uses a proprietary multipoint detection mechanism ensuring excellent immunity from false PD identification. Autoclass and 2-event physical classification are supported. The LTC9101-2B/LTC9102 includes an I²C serial interface operable up to 1MHz. The LTC9101-2B/LTC9102 is pin or I²C programmable to negotiate PD delivered power up to 25.5W.

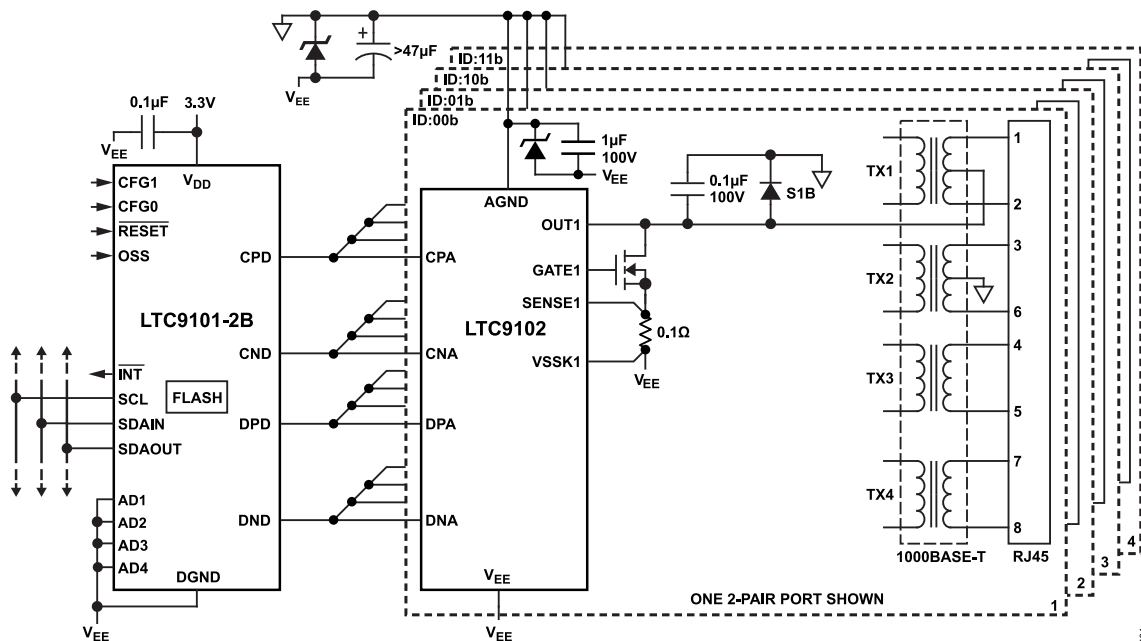


Figure 1. 802.3bt 2-Pair Application, 1 Port Shown

Analog Devices, Inc., is in the process of updating documentation to provide terminology and language that is culturally appropriate, which is a process with a wide scope and will be phased in as quickly as possible. Thank you for your patience.

TABLE OF CONTENTS

Features.....	1	802.3bt 2-Pair Operation.....	18
Applications.....	1	PoE Basics.....	20
Description.....	1	Device Configuration.....	21
Typical Application.....	1	Operating Modes.....	22
Absolute Maximum Ratings.....	3	Connection Check.....	22
LTC9101-2B.....	3	Detection.....	22
LTC9102.....	3	Classification.....	24
ESD Caution.....	3	Power Control.....	26
Pin Configurations.....	4	Serial Digital Interface.....	30
Order Information.....	5	Isolation Requirements.....	30
Electrical Characteristics.....	6	External Component Selection.....	31
Typical Performance Characteristics.....	10	Layout Requirements.....	35
Test Timing Diagrams.....	14	Typical Applications.....	36
I ² C Timing Diagrams.....	15	Package Description.....	37
Pin Functions.....	16	Typical Application.....	39
Applications Information.....	18	Related Parts.....	39
Overview.....	18		

REVISION HISTORY**11/2024—Revision 0: Initial Version**

ABSOLUTE MAXIMUM RATINGS

LTC9101-2B

Table 1. (Notes 1, 4)

PARAMETER	RATING
Supply Voltages (with respect to DGND)	
V_{DD}	-0.3V to 3.6V
CAP1, CAP2	-0.3V to 1.32V
Digital Pins	
ADn, CFGn, OSS, SDAIN, SDAOUT, SCL, \overline{RESET} , \overline{INT}	-0.3V to $V_{DD} + 0.3V$
Analog Pins	
CPD, CND, DPD, DND	-0.3V to $V_{DD} + 0.3V$
Operating Ambient Temperature Range	-40°C to 85°C
Operating Junction Temperature Range (Note 2)	-40°C to 125°C
Storage Temperature Range	-65°C to 150°C

LTC9102

Table 2. (Note 1)


PARAMETER	RATING
Supply Voltages (with respect to V_{EE})	
AGND	-0.3V to 80V
PWRIN	-0.3V to 80V
CAP3, CAP4	-0.3V to 5V
VSSKn	-0.3V to 0.3V
Analog Pins	
SENSEn, OUTn	-20V to 80V
GATEn, IDn, PWRMDn	-0.3V to 80V
CPA, CNA, DPA, DNA	-0.3V to CAP3 + 0.3V
EXT3	-0.3V to 30V
Operating Ambient Temperature Range	-40°C to 85°C
Operating Junction Temperature Range (Note 2)	-40°C to 125°C
Storage Temperature	-65°C to 150°C

ESD CAUTION




ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATIONS

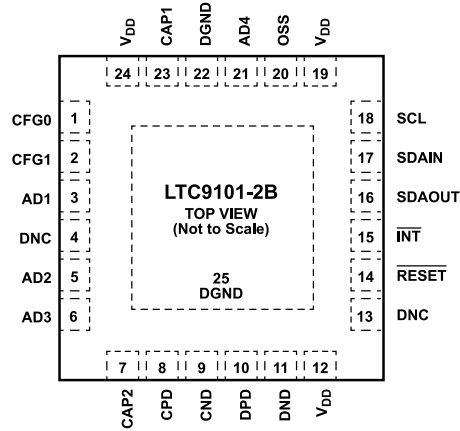

- NOTES
1. DNC = DO NOT CONNECT. DO NOT CONNECT TO THIS PIN.
 2. $\theta_{JC} = 4^{\circ}\text{C/W}$, $\theta_{JA} = 47^{\circ}\text{C/W}$
 3. EXPOSED PAD (PIN 25) IS DGND, MUST BE SOLDERED TO PCB.

Figure 2. LTC9101-2B

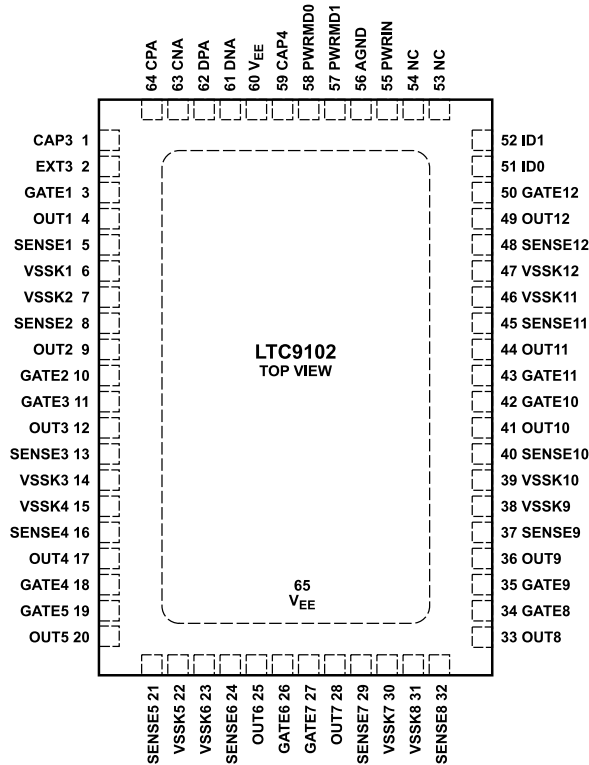

- NOTES
1. NC = NO CONNECT. DO NOT CONNECT TO THIS PIN.
 2. $\theta_{JC} = 1^{\circ}\text{C/W}$, $\theta_{JA} = 22^{\circ}\text{C/W}$
 3. EXPOSED PAD (PIN 65) IS V_{EE} , MUST BE SOLDERED TO PCB.

Figure 3. LTC9102

ORDER INFORMATION**Table 3.**

LEAD FREE FINISH	TAPE AND REEL	PART MARKING	PACKAGE DESCRIPTION	TEMPERATURE RANGE
LTC9101AUF-2B#PBF	LTC9101AUF-2B#TRPBF	9101B	24-Lead (4mm × 4mm) Plastic QFN	–40°C to 85°C
LTC9102AUKJ#PBF	LTC9102AUKJ#TRPBF	LTC9102	64-Lead (7mm × 11mm) Plastic QFN	–40°C to 85°C

Contact the factory for parts specified with wider operating temperature ranges. [Tape and reel specifications](#). Some packages are available in 500 unit reels through designated sales channels with #TRMPBF suffix.

ELECTRICAL CHARACTERISTICS

The * denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$.
 AGND – $V_{EE} = 55\text{V}$ and $V_{DD} - \text{DGND} = 3.3\text{V}$ unless otherwise noted. (Notes 3 and 4)

Table 4.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V_{DD}	Main PoE Supply Voltage	AGND – V_{EE}				
		Type 3 Compliant Output	* 51		57	V
	LTC9102 Undervoltage Lockout	AGND – V_{EE}	*	8.2	9	V
	V_{DD} Supply Voltage	$V_{DD} - \text{DGND}$	* 3	3.3	3.6	V
	Undervoltage Warning		2.8		V	
	Undervoltage Lockout		2.6			
	V_{DD} Slew Rate, Falling	$2.4 \leq V_{DD} - \text{DGND} \leq 3.0$ (Note 7)			20	mV/ μs
V_{CAP1}, V_{CAP2}	Internal Regulator Supply Voltage	$V_{CAP1} - \text{DGND}, V_{CAP2} - \text{DGND}$ (Note 13)		1.2		V
V_{CAP3}	Internal 3.3V Regulator Supply Voltage	$\text{CAP3} - V_{EE}$ (Note 13)	* 3	3.3	3.6	V
$t_{CAP3EXT}$	CAP3 External Supply Rise Time	$0.5\text{V} < \text{CAP3} < \text{CAP3}(\text{Min}), \text{EXT3 Tied to CAP3}$ (Note 7)	*		1	ms
V_{CAP4}	Internal 4.3V Regulator Supply Voltage	$\text{CAP4} - V_{EE}$ (Note 13)	*	4.3		V
I_{EE}	V_{EE} Supply Current	PWRIN Pin Connected to AGND, EXT3 LOW, All Gates Fully Enhanced	7.7	11	14	mA
	3.3V Rail Supply Current	From CAP3 = 3.3V (EXT3 HIGH)	4.2	5.4	6.6	mA
I_{DD}	V_{DD} Supply Current	$(V_{DD} - \text{DGND}) = 3.3\text{V}$	*	40	60	mA
Detection						
	Forced Current	Load Resistance 15.5k to 32k	* 220	240	260	μA
			* 143	160	180	μA
	Forced Voltage	Load Resistance 18.5k to 27.5k	* 7	8	9	V
			* 3	4	5	V
V_{OC}	Detection Current Compliance	AGND – $\text{OUTn} = 0\text{V}$	*	0.8	0.9	mA
	Detection Voltage Compliance	AGND – OUTn , Open Port	*	10.4	12	V
	Detection Voltage Slew Rate	AGND – OUTn , $C_{\text{PORT}} = 150\text{nF}$ (Note 7)			0.01	V/ μs
	Min. Valid Signature Resistance		* 15.5	17	18.5	k Ω
	Max. Valid Signature Resistance		* 27.5	29.7	32	k Ω
Classification						
V_{CLASS}	Classification Voltage	AGND – OUTn , $\text{SENSEn} - \text{VSSKn} < 5\text{mV}$	* 16		20.5	V
	Classification Current Compliance	$\text{SENSEn} - \text{VSSKn}$, $\text{OUTn} = \text{AGND}$ (Note 14)	* 7	8	9	mV
	Classification Threshold	$\text{SENSEn} - \text{VSSKn}$ (Note 14)				
		Class Signature 0 – 1	* 0.5	0.65	0.8	mV
		Class Signature 1 – 2	* 1.3	1.45	1.6	mV
		Class Signature 2 – 3	* 2.1	2.3	2.5	mV
		Class Signature 3 – 4	* 3.1	3.3	3.5	mV
Class Signature 4 – Overcurrent	* 4.5	4.8	5.1	mV		
V_{MARK}	Classification Mark State Voltage	AGND – OUTn , $\text{SENSEn} - \text{VSSKn} < 5\text{mV}$	* 7.5	9	10	V
	Mark State Current Compliance	$\text{OUTn} = \text{AGND}$	* 7	8	9	mV
Gate Driver						
	GATE Pin Pull-Down Current	Port Off, $\text{GATEn} = V_{EE} + 5\text{V}$		1		mA
	GATE Pin Fast Pull-Down Current	$\text{GATEn} = V_{EE} + 5\text{V}$		65		mA
	GATE Pin On Voltage	$\text{GATEn} - V_{EE}$, $I_{\text{GATEn}} = 1\mu\text{A}$	* 11		14	V
Output Voltage Sense						
V_{PG}	Power Good Threshold Voltage	$\text{OUTn} - V_{EE}$	* 2	2.4	2.8	V
	OUT Pin Pull-Up Resistance to AGND	Port On		2500		k Ω
		Port Off	* 300	500	700	k Ω

ELECTRICAL CHARACTERISTICS

Table 4. (Continued)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS	
Current Sense							
V_{LIM-2P}	Active Current Limit	$OUTn - V_{EE} < 10V$					
		Class 1 to Class 3	*	40	42.5	45	mV
		Class 4	*	80	85	90	mV
$V_{INRUSH-2P}$	Active Current Limit, Inrush	$OUTn - V_{EE} < 30V$ (Note 15)	*	40	42.5	45	mV
$V_{HOLD-2P}$	DC Disconnect Sense Voltage	$SENSEn - VSSKn$	*	500	700	900	μV
V_{SC}	Short-Circuit Sense	$SENSEn - VSSKn - V_{LIM-2P}$		60			mV
Port Current Readback (See Typical Performance Characteristics, Note 16)							
	Full-Scale Range	(Notes 7, 15)		204.6		mV	
	LSB Weight	$ SENSEn - VSSKn $, $VSSKn = V_{EE}$ (Note 14)		24.98		$\mu V/LSB$	
	Conversion Period			1.967		ms	
V_{EE} Readback (See Typical Performance Characteristics, Note 16)							
	Full-Scale Range	(Note 7)		82		V	
	LSB Weight	$ AGND - V_{EE} $		10.01		mV/LSB	
	Conversion Period			1.967		ms	
Digital Interface							
V_{ILD}	Digital Input Low Voltage	ADn , \overline{RESET} , OSS , $CFGn$ (Note 6)	*		0.8	V	
	I ² C Input Low Voltage	SCL , $SDAIN$ (Note 6)	*		1	V	
V_{IHD}	Digital Input High Voltage		*	2.2		V	
	Digital Output Low Voltage	$I_{SDAOUT} = 3mA$, $I_{INT} = 3mA$	*		0.4	V	
		$I_{SDAOUT} = 5mA$, $I_{INT} = 5mA$	*		0.7	V	
	Internal Pull-Up to V_{DD}	ADn , \overline{RESET} , OSS		50		k Ω	
	Internal Pull-Down to $DGND$	$CFG0$		50		k Ω	
	EXT3 Pull-Down to V_{EE}			50		k Ω	
	IDn Internal Pull-Up to $CAP4$	$IDn = 0V$		5		μA	
PSE Timing Characteristics (Note 7)							
t_{DET}	Detection Time	Beginning to End of Detection	*	380	500	ms	
t_{CLASS_RESET}	Classification Reset Duration		*	15		ms	
t_{CEV}	Class Event Duration		*	6	15	ms	
t_{CEVON}	Class Event Turn On Duration	$C_{PORT} = 0.6\mu F$	*		0.1	ms	
t_{LCE}	Long Class Event Duration		*	88	105	ms	
t_{CLASS}	Class Event I_{CLASS} Measurement Timing		*	6		ms	
t_{CLASS_LCE}	Long Class Event I_{CLASS} Measurement Timing		*	6	75	ms	
t_{CLASS_ACS}	Autoclass I_{CLASS} Measurement Timing		*	88	105	ms	
t_{ME1}	Mark Event Duration (Except Last Mark Event)	(Note 11)	*	6	9.6	12	ms
t_{ME2}	Last Mark Event Duration	(Note 11)	*	6	20		ms
t_{PON}	Power On Delay, Auto Mode	From End of Valid Detect to End of Valid Inrush	*		400	ms	
t_{AUTO_PSE1}	Autoclass Power Measurement Start	From End of Inrush to Beginning of Autoclass Power Measurement	*	1.4	1.6	s	
t_{AUTO_PSE2}	Autoclass Power Measurement End	From End of Inrush to End of Autoclass Power Measurement	*	3.1	3.5	s	
t_{AUTO_WINDOW}	Autoclass Average Power Sliding Window		*	0.15	0.23	0.3	s
t_{ED}	Fault Delay	From Power On Fault to Next Detect	*	1.0	1.3	1.8	s
t_{START}	Maximum Current Limit Duration During Inrush		*	50	60	75	ms
t_{LIM}	Maximum Current Limit Duration After Inrush	(Note 12)					
		$t_{LIMn} = 0x0$		50		ms	
		$t_{LIMn} = 0x1$		15		ms	
		$t_{LIMn} = 0x2$		10	15	22	ms

ELECTRICAL CHARACTERISTICS

Table 4. (Continued)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
		$t_{LIMn} = 0 \times 3$	6	11	17	ms
t_{MPS}	Maintain Power Signature (MPS) Pulse Width Sensitivity	Current Pulse Width to Reset Disconnect Timer (Note 8)	*		6	ms
t_{DIS}	Maintain Power Signature (MPS) Dropout Time	(Note 5)	* 320	370	400	ms
t_{BIT}	Bit Duration		* 24	25	26	μ s
$t_{OSS-OFF}$	Shutdown Priority Delay		*	6.5	10	μ s
t_{r_OSS}	OSS Rise Time		* 1		300	ns
t_{f_OSS}	OSS Fall Time		* 1		300	ns
t_{OSS_IDL}	OSS Idle Time			50		μ s
	I ² C Watchdog Timer Duration		* 1.5	2	3	s
	Minimum Pulse Width for Masked Shutdown		* 3			μ s
	Minimum Pulse Width for RESET		* 4.5			μ s

I²C Timing (Note 7)

f_{SCLK}	Clock Frequency		*		1	MHz
t_1	Bus Free Time	Figure 31 (Note 9)	* 480			ns
t_2	Start Hold Time	Figure 31 (Note 9)	* 240			ns
t_3	SCL Low Time	Figure 31 (Note 9)	* 480			ns
t_4	SCL High Time	Figure 31 (Note 9)	* 240			ns
t_5	SDAIN Data Hold Time	Figure 31 (Note 9)	* 60			ns
	Data Clock to SDAOUT Valid	Figure 31 (Note 9)	*		250	ns
t_6	Data Set-Up Time	Figure 31 (Note 9)	* 80			ns
t_7	Start Set-Up Time	Figure 31 (Note 9)	* 240			ns
t_8	Stop Set-Up Time	Figure 31 (Note 9)	* 240			ns
t_r	SCL, SDAIN Rise Time	Figure 31 (Note 9)	*		120	ns
t_f	SCL, SDAIN Fall Time	Figure 31 (Note 9)	*		60	ns
	Fault Present to \overline{INT} Pin Low	(Notes 9, 10)	*		150	ns
	Stop Condition to \overline{INT} Pin Low	(Notes 9, 10)	*		1.5	μ s
	ARA to \overline{INT} Pin High Time	(Note 9)	*		1.5	μ s
	SCL Fall to ACK Low	(Note 9)	*		250	ns

Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifespan.

Note 2: This chipset includes overtemperature protection that is intended to protect the device during momentary overload conditions. Junction temperature will exceed 140°C when overtemperature protection is active. Continuous operation above the specified maximum operating junction temperature may impair device reliability.

Note 3: All currents into device pins are positive; all currents out of device pins are negative.

Note 4: The LTC9102 operates with a negative supply voltage (with respect to AGND). To avoid confusion, voltages in this data sheet are referred to in terms of absolute magnitude.

Note 5: t_{DIS} is the same as t_{MPDO} defined by IEEE 802.3.

Note 6: The LTC9101-2B digital interface operates with respect to DGND. All logic levels are measured with respect to DGND.

Note 7: Guaranteed by design, not subject to test.

Note 8: The IEEE 802.3 defines MPS as the set of minimum PSE and PD input current requirements to maintain power. An LTC9101-2B/LTC9102 port resets its MPS timer when $V_{SENSEn} - VSSKn \geq V_{HOLD-2P}$ for t_{MPS} and removes port power when $V_{SENSEn} - VSSKn \geq V_{HOLD-2P}$ for a period longer than t_{DIS} . See the [Disconnect](#) section.

Note 9: Values Measured at V_{IHd} .

ELECTRICAL CHARACTERISTICS

Note 10: If a fault condition occurs during an I²C transaction, the $\overline{\text{INT}}$ pin will not be pulled down until a stop condition is present on the I²C bus.

Note 11: Load characteristics of the LTC9102 during Mark: $7V < (AGND - V_{OUTn}) < 10V$

Note 12: See the LTC9101-2B Software Interface guide for information on serial bus usage and device configuration and status registers.

Note 13: Do not source or sink current from CAP1, CAP2, CAP3 and CAP4.

Note 14: Port current and port power measurements depend on sense resistor value (0.1 Ω typical). See the [External Component Selection](#) section for details.

Note 15: See the [Inrush Control](#) section for details on inrush threshold selection.

Note 16: ADC characteristics and typical performance are described in terms of LTC9102 hardware capability. Measurements from LTC9102 are processed and synthesized by the LTC9101-2B. See LTC9101-2B Software Interface guide for register descriptions and LSB weights, as presented to the user (port current, port voltage, V_{EE} voltage, and system temperature).

TYPICAL PERFORMANCE CHARACTERISTICS

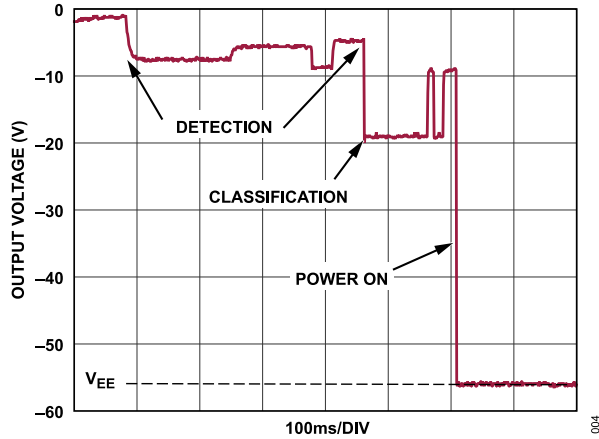


Figure 4. Power-On Sequence, 802.3bt 2-Pair

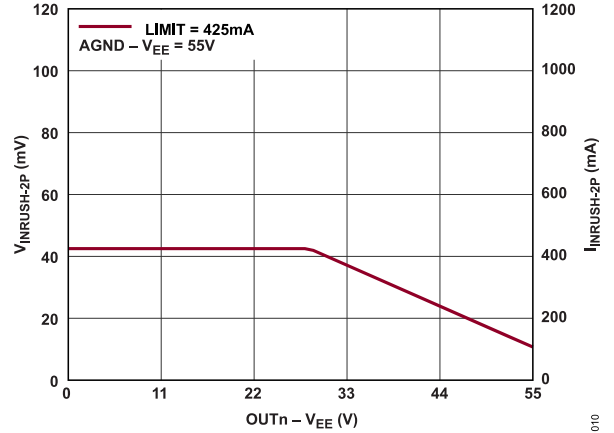


Figure 7. Inrush Current Limit (Note 15)

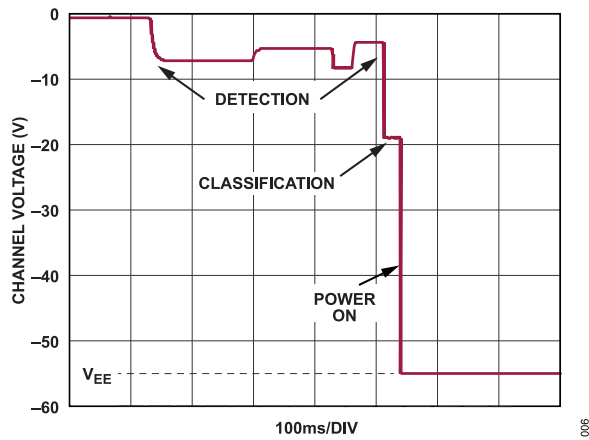


Figure 5. Power-On Sequence, Type 1 Mode

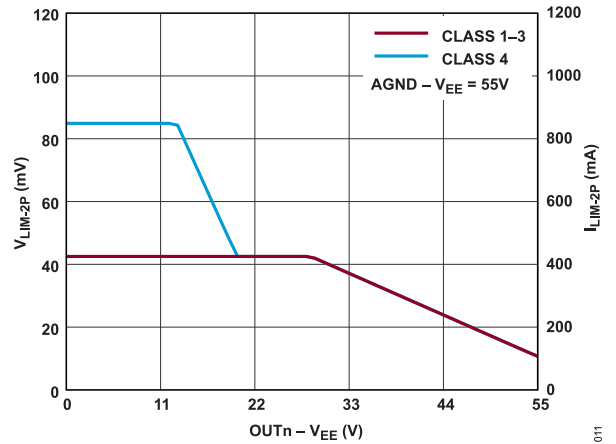


Figure 8. Power-On Current Limits

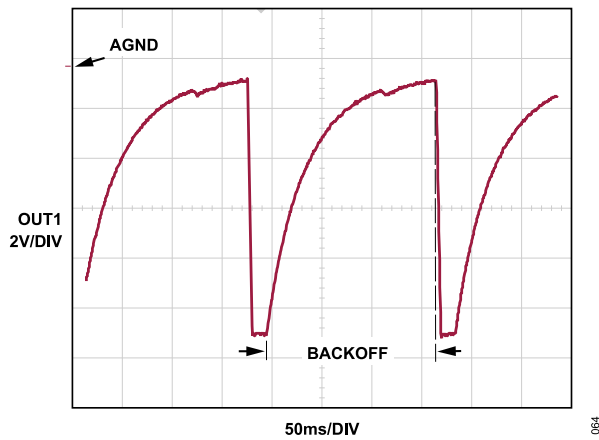


Figure 6. Open-Circuit Detection

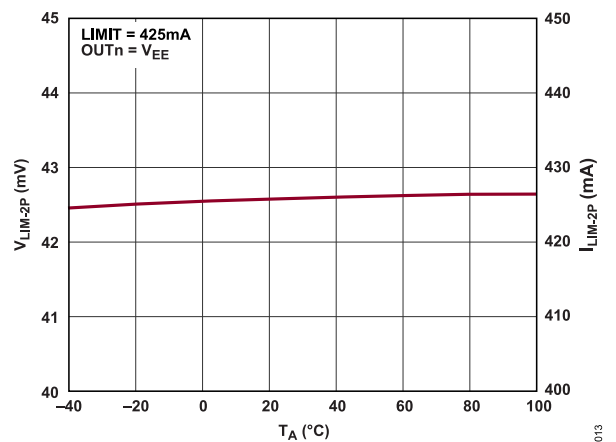


Figure 9. I_{LIM-2P} vs. Temperature

TYPICAL PERFORMANCE CHARACTERISTICS

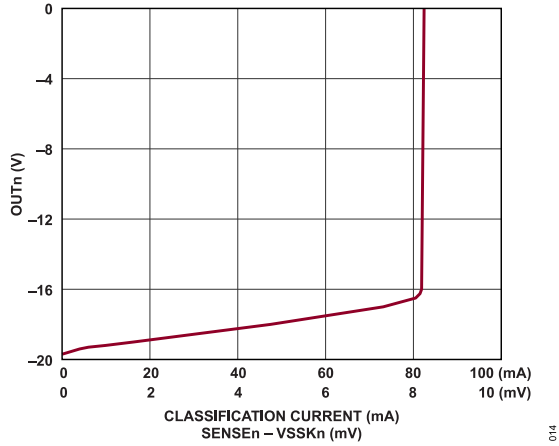


Figure 10. Classification Current Compliance

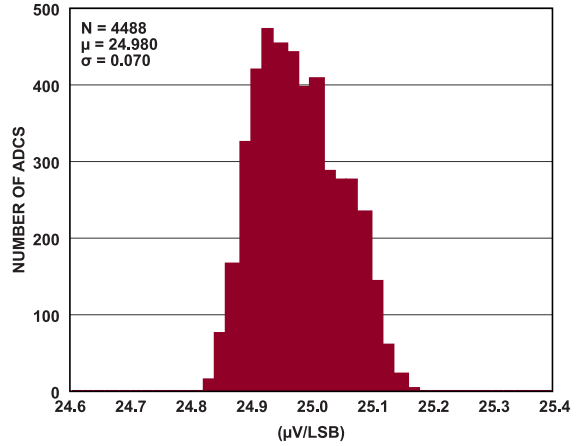


Figure 13. Port Current Readback LSB

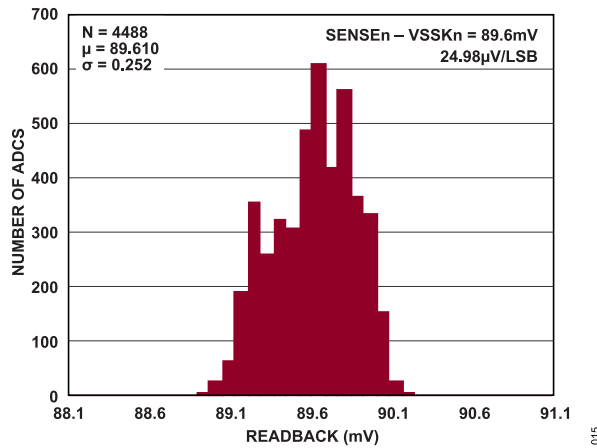


Figure 11. Port Current Readback

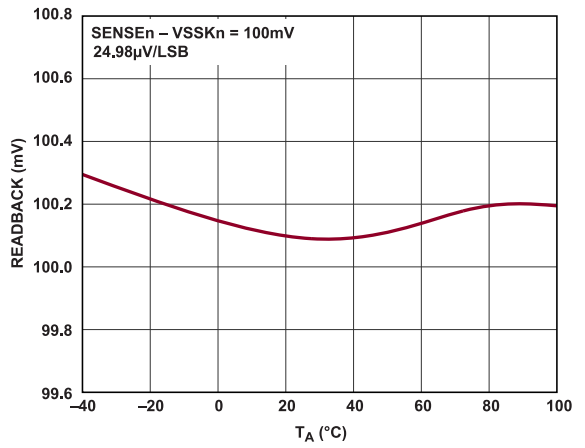


Figure 14. Port Current Readback vs. Temperature

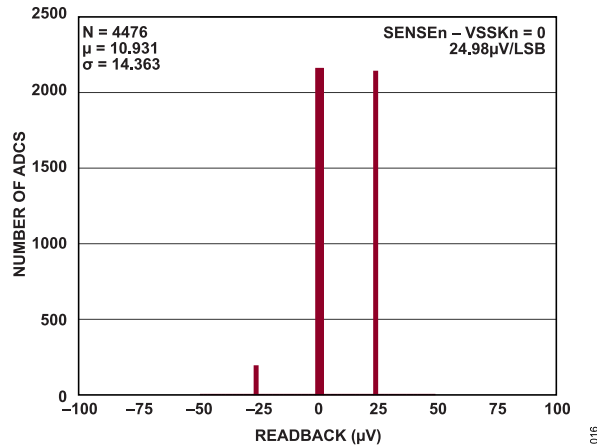


Figure 12. Port Current Readback Offset

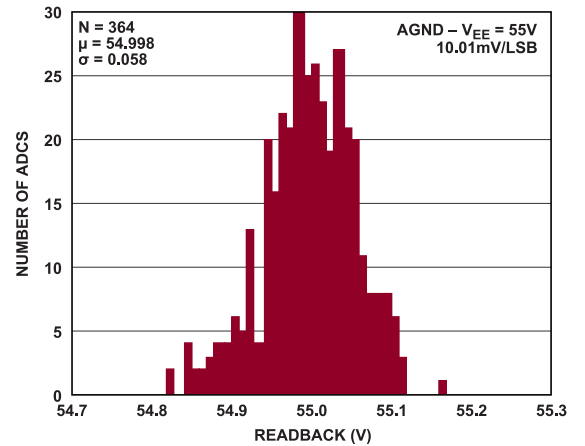


Figure 15. VEE Readback

TYPICAL PERFORMANCE CHARACTERISTICS

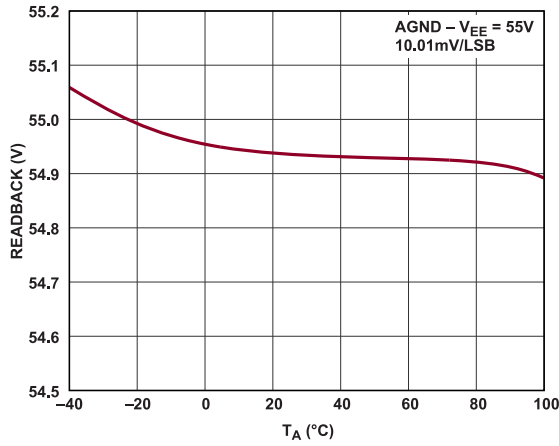


Figure 16. V_{EE} Readback vs. Temperature

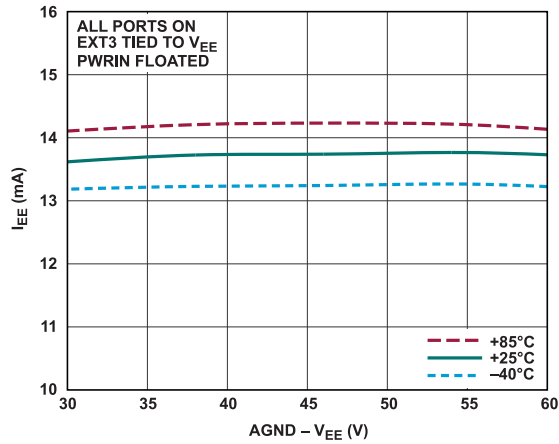


Figure 17. V_{EE} Supply Current (I_{EE}) vs. Voltage and Temperature

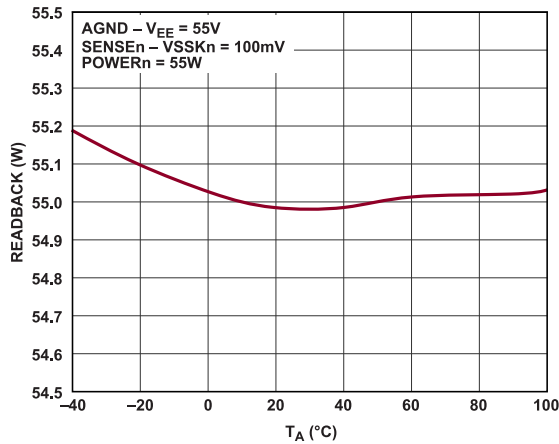


Figure 18. Port Power Monitor Accuracy vs. Temperature

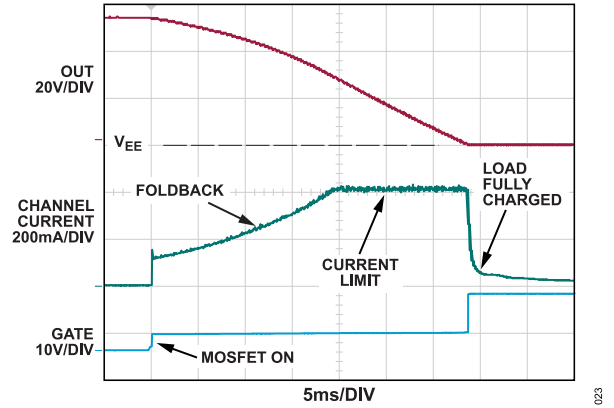


Figure 19. Powering Up into $180\mu\text{F}$

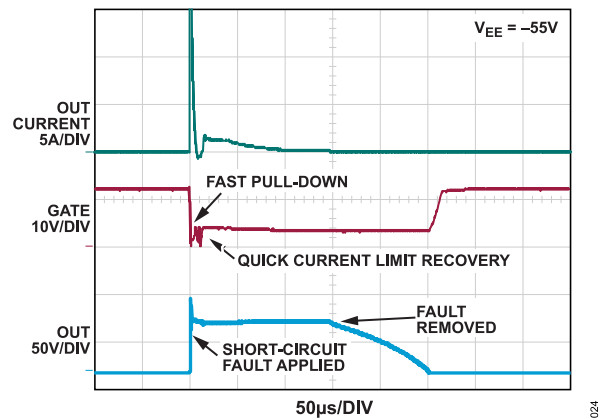


Figure 20. Short-Circuit Recovery

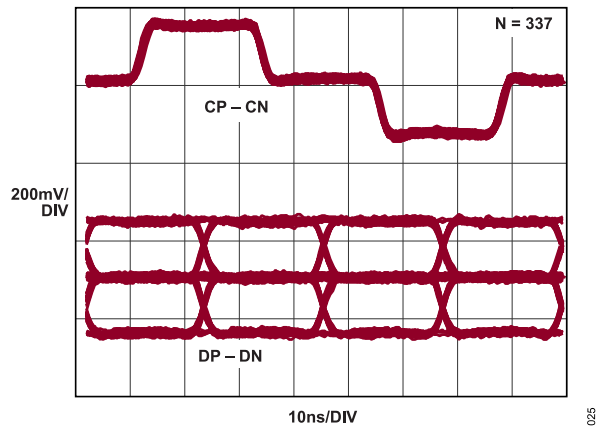


Figure 21. Clock and Data Write Eye Diagram

TYPICAL PERFORMANCE CHARACTERISTICS

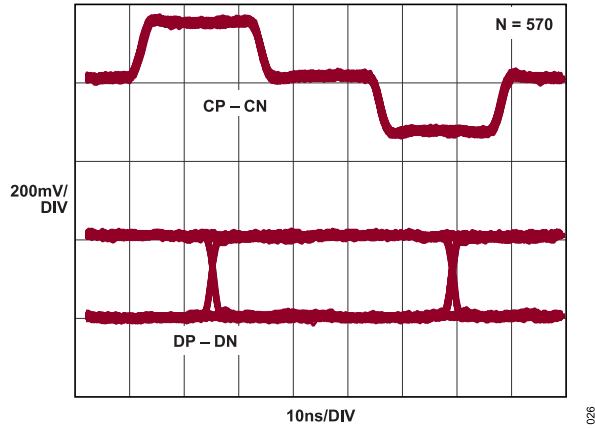


Figure 22. Clock and Data Read Eye Diagram

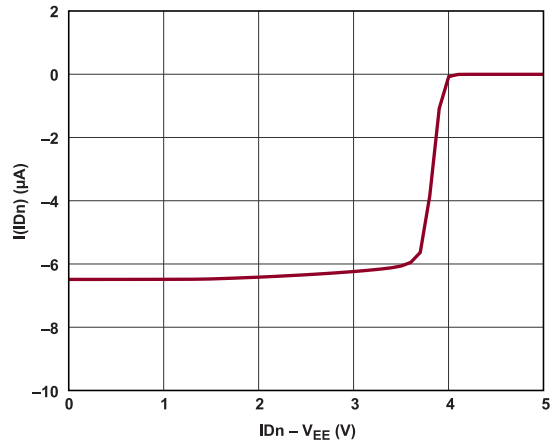


Figure 25. IDn Pin Current vs. Voltage

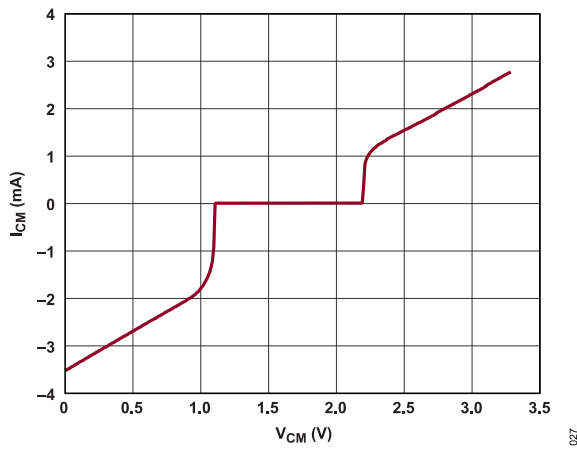


Figure 23. LTC9102 CP/CN and DP/DN Common-Mode Correction Current

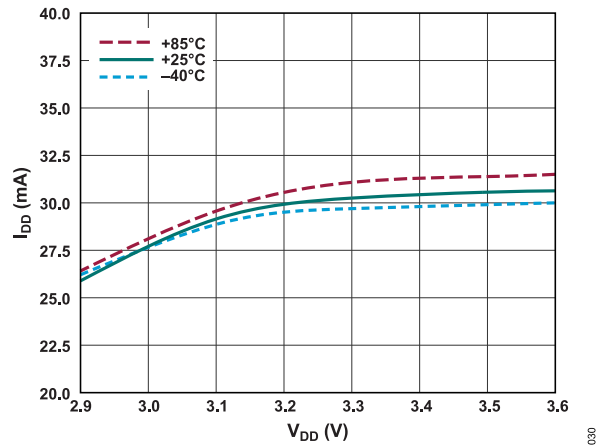


Figure 26. VDD Supply Current (IDD) vs. Voltage and Temperature

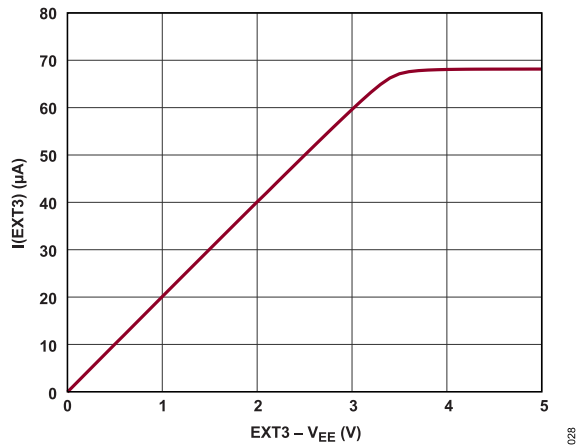


Figure 24. EXT3 Pin Current vs. Voltage

TEST TIMING DIAGRAMS

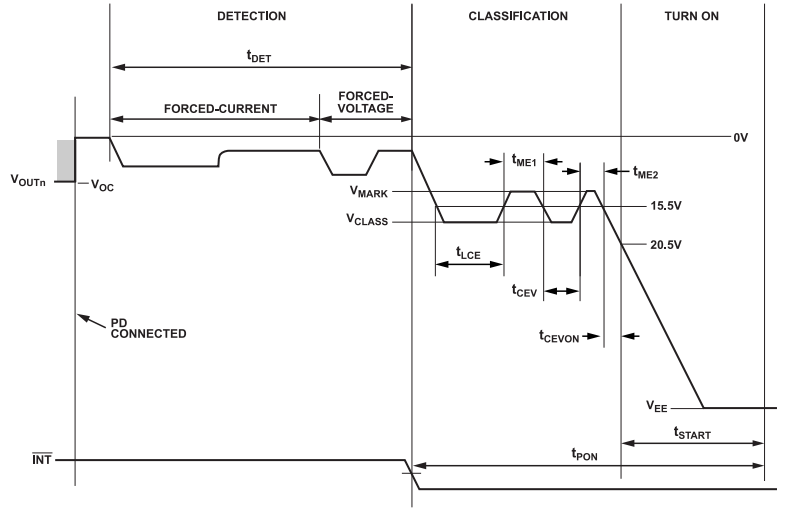


Figure 27. Detect, Class, and Turn-On Timing, Auto or Semi-Auto Modes




Figure 28. Current Limit Timings




Figure 29. DC Disconnect Timing




Figure 30. One-Bit Shutdown Priority Timing

TEST TIMING DIAGRAMS

I²C TIMING DIAGRAMS

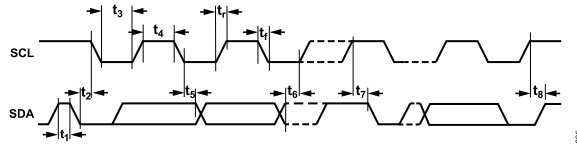


Figure 31. I²C Interface Timing

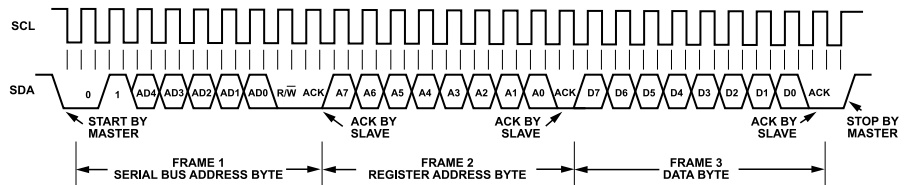


Figure 32. Writing to a Register

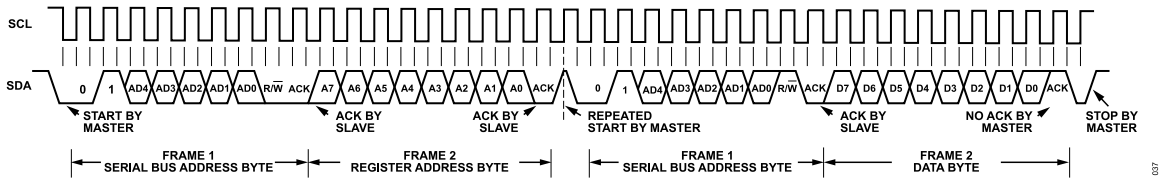


Figure 33. Reading from a Register

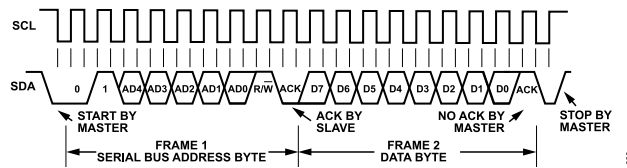


Figure 34. Reading the Interrupt Register (Short Form)

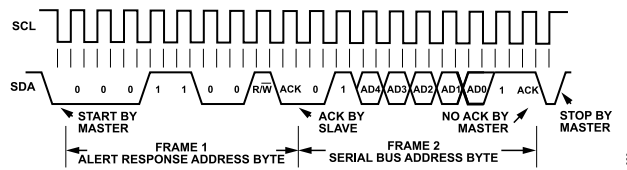


Figure 35. Reading from Alert Response Address

PIN FUNCTIONS

Pin No.	Mnemonic	Description
LTC9101-2B		
Pins 2, 1 Respectively	CFG[1:0]	Device Configuration Inputs. Tie the configuration pins high or low to set the number of connected LTC9102 devices. See the Device Configuration section for additional details.
Pins 7, 23 Respectively	CAP[2:1]	Core Power Supply Bypass Capacitors. Connect each pin to a 1 μ F capacitance to DGND for the internal 1.2V regulator bypass. Do not use other capacitor values. Do not source or sink current from this pin.
Pin 8	CPD	Clock Transceiver Positive Input Output (Digital). Connect to CPA through a data transformer.
Pin 9	CND	Clock Transceiver Negative Input Output (Digital). Connect to CNA through a data transformer.
Pin 10	DPD	Data Transceiver Positive Input Output (Digital). Connect to DPA through a data transformer.
Pin 11	DND	Data Transceiver Negative Input Output (Digital). Connect to DNA through a data transformer.
Pins 12, 19, 24	V _{DD}	V _{DD} IO Power Supply. Connect to a 3.3V power supply relative to DGND. Each V _{DD} pin must be locally bypassed with at least a 0.1 μ F capacitor. A 10 μ F bulk capacitor must be connected across V _{DD} for increased surge immunity.
Pin 14	RESET	Reset Input, Active Low. When RESET is low, the LTC9101-2B/LTC9102 is held inactive with all ports off and all internal registers reset. When RESET is pulled high, the LTC9101-2B/LTC9102 begins normal operation. RESET can be connected to an external capacitor or RC network to provide a power turn-on delay. Internal filtering of RESET prevents glitches less than 1 μ s wide from resetting the LTC9101-2B/LTC9102. Internally pulled up to V _{DD} .
Pin 15	INT	Interrupt Output, Open Drain. INT will pull low when any one of several events occur in the LTC9101-2B. It will return to a high impedance state when bits 6 or 7 are set in the Reset register. The INT signal can be used to generate an interrupt to the host processor, eliminating the need for continuous software polling. Individual INT events can be disabled using the Int Mask register. See LTC9101-2B Software Interface guide documentation

Pin No.	Mnemonic	Description
		for more information. INT is only updated between I ² C transactions.
Pin 16	SDAOUT	Serial Data Output, Open Drain Data Output for the I ² C Serial Interface Bus. The LTC9101-2B uses two pins to implement the bidirectional SDA function to simplify opto isolation of the I ² C bus. To implement a standard bidirectional SDA pin, tie SDAOUT and SDAIN together. See the Applications Information section for additional details.
Pin 17	SDAIN	Serial Data Input. High impedance data input for the I ² C serial interface bus. The LTC9101-2B uses two pins to implement the bidirectional SDA function to simplify opto isolation of the I ² C bus. To implement a standard bidirectional SDA pin, tie SDAOUT and SDAIN together. See the Applications Information section for additional details.
Pin 18	SCL	Serial Clock Input. High impedance clock input for the I ² C serial interface bus. The SCL pin should be connected directly to the I ² C SCL bus line. SCL must be tied high if the I ² C serial interface bus is not used.
Pin 20	OSS	Maskable Shutdown Input, Active High. Supports both 1-bit shutdown priority and 3-bit shutdown priority. See the Over Supply Shutdown (OSS) section for additional details. Internally pulled down to DGND.
Pins 21, 6, 5, 3 Respectively	AD[4:1]	I ² C Address Bits 4 to 1. Tie the address pins high or low to set the base I ² C serial address. The base address will be (01A ₄ A ₃ A ₂ A ₁ 0b). Internally pulled up to V _{DD} . See the Bus Addressing section for additional details.
Pins 22, 25	DGND	Digital Ground. DGND should be connected to the return from the V _{DD} supply.
LTC9102		
Pin 1	CAP3	Analog Internal 3.3V Power Supply Bypass Capacitor. Connect a 1 μ F ceramic cap to V _{EE} . A 3.3V power supply may be connected to this pin to improve power supply efficiency. The EXT3 pin must be pulled to CAP3 to shut off the internal 3.3V regulator if power is supplied externally. Do not source or sink current from this pin. Do not connect to CAP3 except as explicitly instructed in ADI documentation (e.g., strapping LTC9102 pins and terminating the serial interface).

PIN FUNCTIONS

Pin No.	Mnemonic	Description
Pin 2	EXT3	External 3.3V Enable. Connect the EXT3 pin to CAP3 to shut off the internal 3.3V regulator when power is supplied externally. Float or connect to V_{EE} for internal regulator operation.
Pins 47, 46, 39, 38, 31, 30, 23, 22, 15, 14, 7, 6 Respectively	VSSK[12:1]	Kelvin Sense to V_{EE} . Connect to V_{EE} side of sense resistor for channel n through a 0.1 Ω resistor. Do not connect directly to V_{EE} plane. See the Kelvin Sense section for requirements.
Pins 48, 45, 40, 37, 32, 29, 24, 21, 16, 13, 8, 5 Respectively	SENSE[12:1]	Current Sense Input, channel n. SENSEn monitors the external MOSFET current via a 0.1 Ω sense resistor between SENSEn and VSSKn. If the voltage across the sense resistor reaches the current limit threshold I_{LIM-2P} , the GATEn pin voltage is lowered to maintain constant current in the external MOSFET. See the Applications Information section for additional details. If the channel is unused, tie SENSEn to V_{EE} .
Pins 49, 44, 41, 36, 33, 28, 25, 20, 17, 12, 9, 4 Respectively	OUT[12:1]	Output Voltage Monitor, channel n. Connect OUTn to the output channel. A current limit foldback circuit limits the power dissipation in the external MOSFET by reducing the current limit threshold when the drain-to-source voltage exceeds 10V. A port power good event is raised when the voltage from OUTn to V_{EE} drops below 2.4V (typ). A 500k resistor is connected internally from OUTn to AGND when the channel is idle. If the channel is unused, the OUTn pin must float.
Pins 50, 43, 42, 35, 34, 27, 26, 19, 18, 11, 10, 3 Respectively	GATE[12:1]	Gate Drive, channel n. Connect GATEn to the gate of the external MOSFET for channel n. When the MOSFET is turned on, the gate voltage is driven to 12V (typ) above V_{EE} . During a current limit condition, the voltage at GATEn will be reduced to maintain constant current through the external MOSFET. If the fault timer expires, GATEn is pulled down, turning the MOSFET off and raising a port fault event. If the channel is unused, the GATEn pin must float.
Pins 52, 51 Respectively	ID[1:0]	Transceiver ID. Sets the address of the LTC9102 on the multidrop high-speed data interface. ID numbering must start at 00b. Tie high by connecting to CAP3. Tie low by connecting to V_{EE} . See the Device Configuration section for additional details.
Pin 55	PWRIN	Startup Regulator Bypass and External Low Voltage Supply Input. Power for the

Pin No.	Mnemonic	Description
		internal 4.3V and 3.3V internal supplies. An internal regulator maintains the voltage of this pin above 6V. An external resistor or supply may be connected to this node to improve the power efficiency of the LTC9102. Connect a 1 μ F capacitor between this pin and V_{EE} .
Pin 56	AGND	Analog Ground.
Pins 57, 58 Respectively	PWRMD[1:0]	Maximum Power Mode Input. Connect PWRMD0 of the LTC9102 with ID[1:0] = 00b to V_{EE} with configuration resistor R_{PWRMD} . When the LTC9101-2B is reset, R_{PWRMD} selects initial maximum power allocation values for every port in the chipset; the system power supply must be sized to support all ports outputting up to R_{PWRMD} . When auto mode is enabled, the chipset runs independently as a PoE PSE. The chipset detects and classes all ports, granting power to each port up to R_{PWRMD} setting. The PWRMD0 pin of LTC9102 with ID pins set to 01b, 10b, and 11b must be left floating. The PWRMD1 pin of all LTC9102 must be left floating. See the Auto Mode Maximum PSE Power section for R_{PWRMD} options and details. The PWRMD pins are ignored when a custom configuration package is present. See the Stored Configurations section for additional details.
Pin 59	CAP4	Analog Internal 4.3V Power Supply Bypass Capacitor. Connect a 1 μ F ceramic cap to V_{EE} . Do not source or sink current from this pin.
Pins 60, 65	V_{EE}	Main PoE Supply Input. Connect to a -51V to -57V supply, relative to AGND. Voltage depends on PSE Type (Type 3 or 4).
Pin 61	DNA	Data Transceiver Negative Input Output (Analog). Connect to DND through a data transformer.
Pin 62	DPA	Data Transceiver Positive Input Output (Analog). Connect to DPD through a data transformer.
Pin 63	CNA	Clock Transceiver Negative Input Output (Analog). Connect to CND through a data transformer.
Pin 64	CPA	Clock Transceiver Positive Input Output (Analog). Connect to CPD through a data transformer.
Common Pins		
LTC9101-2B Pins 4, 13; LTC9102 Pins 53, 54	NC, DNC	All pins identified with "NC" or "DNC" must be left unconnected.

APPLICATIONS INFORMATION

OVERVIEW

Power over Ethernet, or PoE, is a standard protocol for sending DC power over copper Ethernet data wiring. The IEEE group that administers the 802.3 Ethernet data standards added PoE powering capability in 2003. This original PoE standard, known as 802.3af, allowed for 48V DC power at up to 13W. 802.3af was widely popular, but 13W was not adequate for some applications. In 2009, the IEEE released a new standard, known as 802.3at or PoE+, increasing the voltage and current requirements to provide 25.5W of delivered power. IEEE 802.3af and 802.3at are commonly known as PoE 1. In 2018, the IEEE released the latest PoE standard, known as 802.3bt or PoE 2. 802.3bt maximizes PD delivered power at 71.3W.

The IEEE standard also defines PoE terminology. A device that provides power to the network is known as a PSE, or power sourcing equipment, while a device that draws power from the network is known as a PD, or powered device. PSEs come in two types: endpoints (typically network switches or routers), which provide data and power; and midspans, which provide power but pass through data. Midspans are typically used to add PoE capability to existing non-PoE networks. PDs are typically IP phones, wireless access points, security cameras, and similar devices.

PoE++ Evolution

Even during the development of the IEEE 802.3at (PoE 1) 25.5W standard, it became clear there was a significant and increasing need for more than 25.5W of delivered power. In 2013, the 802.3bt task force was formed to develop a standard capable of increasing delivered PD power.

The primary objective of the task force was to use all four pairs of the Ethernet cable as opposed to the two pair power utilized by 802.3at. Using all four pairs allows for at least twice the delivered power over existing Ethernet cables. Further, the amount of current per two pairs (known as a pairset) is increased while maintaining the Ethernet data signal integrity. 802.3bt increases PD delivered power from 25.5W to 71.3W, enabling IEEE-compliant high power PD applications.

The LTC9101-2B/LTC9102 is a 2-pair device, delivering power to each port over one pairset. Each pairset is driven by a dedicated power channel. In this data sheet, the term channel refers to the PSE circuitry assigned to a corresponding pairset. For the purposes of this document, the terms channel and pairset may be considered interchangeable.

In addition, IEEE 802.3bt enables substantially lower Maintain Power Signature (MPS) currents, resulting in significantly lower standby power consumption. This allows new and emerging government or industry standby regulations to be met using standard PoE components.

LTC9101-2B/LTC9102 Product Overview

The LTC9101-2B/LTC9102 is a sixth generation PSE controller that implements up to 48 (25.5W) 2-pair PSE ports in either an endpoint or midspan application. Virtually all necessary circuitry is included to implement an IEEE 802.3bt-compliant PSE design, requiring an external power MOSFET and sense resistor per port; these minimize power loss compared to alternative designs with onboard MOSFETs, and increase system reliability.

The LTC9101-2B/LTC9102 chipset implements an optional proprietary isolation scheme for inter-chip communication. This architecture substantially reduces BOM cost by replacing expensive opto-isolators and isolated power supplies with a single low-cost transformer. A single LTC9101-2B is capable of controlling a bus of up to 4 LTC9102s over this transformer-isolated interface. Direct connection of the LTC9101-2B and the associated LTC9102s is also possible.

The LTC9101-2B/LTC9102 offers a configurable interrupt signal triggered by per-port events, per-channel power on control and fault telemetry, per-channel current monitoring, V_{EE} monitoring, and 100ms rolling current and voltage averaging.

The LTC9101-2B/LTC9102 also offers advanced sixth-generation PSE features including internal eFlash for storage of firmware updates and custom user configuration packages, 802.3at/bt-compliant mode select, I^2C quad virtualization for full backwards-compatibility with quad-based IC drivers, ultra-low 100m Ω sense resistors, +80V/-20V tolerant port-facing pins, and improvements to cable surge ride through.

Each LTC9102 power channel includes dedicated detection and classification hardware. This allows all ports and channels to detect, classify and power on simultaneously, drastically reducing power on latency across a switch. Other less-advanced PSEs are subject to visible delays as PDs, e.g. LED lights, power on a port-by-port basis.

V_{EE} and port current measurements are performed simultaneously, enabling coherent and precise per-port power monitoring.

802.3BT 2-PAIR OPERATION

The LTC9101-2B includes up to 12 groups of four identical channels. Each group of four channels is referred to as a quad. In the LTC9101-2B architecture, each quad contains register configuration and status for exactly four channels and provides control for four 2-pair 802.3bt ports.

In 2-pair mode, the IEEE 802.3bt standard supports delivered power up to 25.5W, supporting PDs requesting Class 4 power or lower. High-power single-signature PDs (Class 5 and above) and dual-signature PDs are demoted to Class 4 (25.5W) power and receive power over a single pairset.

APPLICATIONS INFORMATION

802.3at Type 1 Mode

All 802.3bt-compliant PSEs are fully backwards compatible with existing 802.3at Type 1 and Type 2 PDs as shown in [Table 5](#).

In addition to full compatibility, 802.3bt PSEs extend support for lower standby power, enhanced current limit timing, and dynamic power management to all PD Types (as supported by the PD application).

The LTC9101-2B further supports 802.3af compliant port operation. In the rare event an 802.3af PD is incompatible with 802.3bt operation, a 15W, No CC mode is supported in the `cfg2p4p` register.

Note that an 802.3at PSE will not pass an 802.3bt PSE compliance test, and an 802.3bt PSE will not pass an 802.3at PSE compliance test. This is by design of the respective standards. 802.3at and 802.3bt devices are designed to be interoperable. Key features of 802.3at and 802.3bt standards are contrasted in [Table 6](#).

Table 5. PSE Maximum Delivered Power, Per-Port¹

DEVICE	PSE						
	STANDARD		802.3at		802.3bt		
	TYPE	1	2	3 (2-Pair)	3 (4-Pair)	4	
PD	802.3at	1	13W	13W	13W	13W	13W
		2	13W ¹	25.5W	25.5W	25.5W	25.5W
	802.3bt	3	13W ¹	25.5W ¹	25.5W ¹	51W	51W
		4	13W ¹	25.5W ¹	25.5W ¹	51W ¹	71.3W

¹ Indicates PD may be allocated less power than requested (demoted).

Table 6. 802.3at Type 1 vs 802.3bt Features

FEATURE	802.3at (Type 1)	802.3bt
First Class Event	Short	Long
First Mark Event (15W Mode)	No	Yes
Limit Timer	No (Uses Cutoff Timer)	Yes
Connection Check	No	2-Pair: No
		4-Pair: Yes
Active Alternative(s)	A or B	2-Pair: A or B
		4-Pair: A and B
Maximum Class Events	1	2-Pair: 2
		4-Pair: 5
Maximum Available Power	Class 3	2-Pair: Class 4
		4-Pair: Class 8
Short MPS	No	Yes
Autoclass	No	Yes

APPLICATIONS INFORMATION

POE BASICS

Common Ethernet data connections consist of two or four twisted pairs of copper wire (commonly known as Ethernet cable), transformer-coupled at each end to avoid ground loops. PoE systems take advantage of this coupling arrangement by applying voltage between the center taps of the data transformers to transmit power from the PSE to the PD without affecting data transmission. Figure 36 shows a high level PoE system schematic.

To avoid damaging legacy data equipment that does not expect to see DC voltage, the PoE standard defines a protocol that determines when the PSE may apply and remove power. Valid PDs are

required to have a specific 25k common-mode resistance at their input. When such a PD is connected to the cable, the PSE detects this signature resistance and applies power. When the PD is later disconnected, the PSE senses the open circuit and removes power. The PSE also removes power in the event of a current fault or short circuit.

When a PD is detected, the PSE looks for a classification signature that tells the PSE the maximum power the PD will draw. The PSE can use this information to allocate power among several ports, to police the power consumption of the PD, or to reject a PD that will draw more power than the PSE has available.

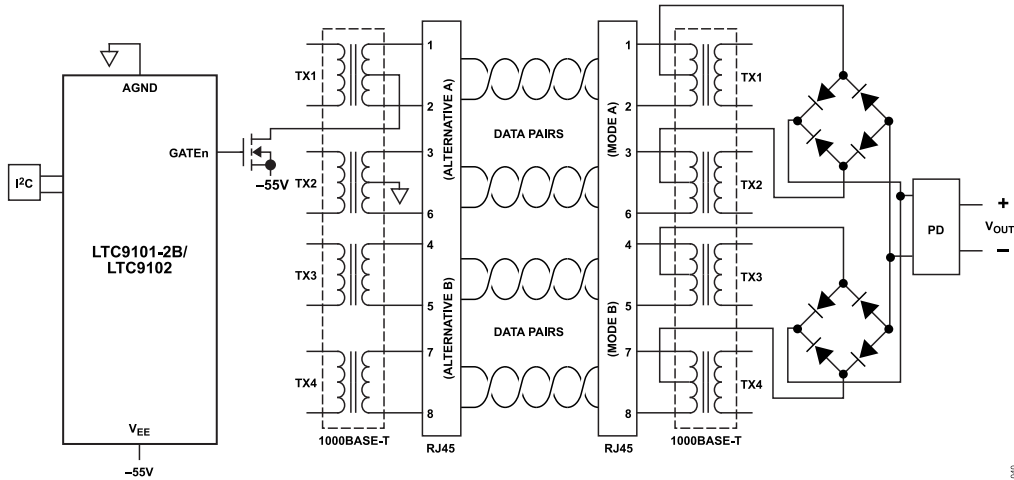


Figure 36. 802.3bt System Diagram—2-Pair PSE and Single-Signature PD

APPLICATIONS INFORMATION

New in 802.3bt

The 802.3bt specification introduces several new features:

- ▶ Type 3 PSEs may be constructed as 2-pair or 4-pair devices. Type 4 PSEs shall be constructed as 4-pair devices.
- ▶ Type 3 and Type 4 PSEs may provide power over all four pairs (both pairsets), depending on the PSE construction and connected PD characteristics.
- ▶ Type 3 and Type 4 PDs are required to be capable of receiving power over all four pairs (both pairsets).
- ▶ Type 3 and 4 PDs can be formed as either a single-signature PD or dual-signature PD. A single-signature PD presents the same valid signature resistor to both pairsets simultaneously (see [Figure 36](#)). A dual-signature PD presents two fully independent valid detection signatures, one to each pairset.
- ▶ Type 3 single-signature PDs request exactly one of six possible power levels: 3.84W, 6.49W, 13W, 25.5W, 40W, or 51W.
- ▶ Type 3 dual-signature PDs request exactly one of four possible power levels on each pairset: 3.84W, 6.49W, 13W, or 25.5W. The total PD requested power is the sum of the requested power on both pairsets.
- ▶ Type 3 PD Classes overlap with Type 1 and 2 Classes in order to provide additional Type 3 feature sets at lower power levels.
- ▶ Type 4 single-signature PDs request exactly one of two possible power levels: 62W or 71.3W.
- ▶ Type 4 dual-signature PDs request exactly 35.6W on at least one pairset and one of five possible power levels on the other pairset: 3.84W, 6.49W, 13W, 25.5W, or 35.6W. The total PD requested power is the sum of the requested power on both pairsets.
- ▶ Classification is extended to a possible maximum of five class events. The additional events allow for unique identification of existing and new PD Classes.

- ▶ Type 3 and 4 PSEs issue a long first class event to advertise Type 3 and 4 feature support to attached PDs.
- ▶ Lower standby power is enabled by shortening the length of the maintain power signature pulse (short MPS). The PD duty cycle drops from ~23% to ~2%. A PD is allowed to present short MPS if the PSE issues a long first class event.
- ▶ Power management is augmented by Autoclass, an optional feature for 802.3bt PSEs and PDs. In an Autoclass system the maximum PD power is measured and reported to the PSE host, enabling the PSE to reclaim output power not used by the PD application and losses in the Ethernet cabling ([Table 7](#)). See the [Autoclass](#) section and LTC9101-2B Software Interface guide for details.

Table 7. IEEE-Specified Power Allocations, Single-Signature PD

PD CLASS	PSE OUTPUT POWER	ALLOCATED CABLING LOSS	PD INPUT POWER
1	4W	0.16W	3.84W
2	6.7W	0.21W	6.49W
3	14W	1W	13W
4	30W	4.5W	25.5W
5	45W	5W	40W
6	60W	9W	51W
7	75W	13W	62W
8	90W	18.7W	71.3W

DEVICE CONFIGURATION

An LTC9101-2B can control between one and four LTC9102. Each LTC9102 controls 12 power channels. Thus, each LTC9101-2B can control up to 48 power channels.

As described later in the [Bus Addressing](#) section, each group of four channels occupies a single I²C address.

Table 8. Device Configuration Options

CFG[1:0]	NUMBER OF PORTS	NUM 9102s	I ² C ADDRs	I ² C ADDRESS OFFSET											
				0	1	2	3	4	5	6	7	8	9	10	11
0 (00b)	12	1	3	✓	✓	✓									
1 (01b)	24	2	6	✓	✓	✓	✓	✓	✓						
2 (10b)	36	3	9	✓	✓	✓	✓	✓	✓	✓	✓	✓			
3 (11b)	48	4	12	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

APPLICATIONS INFORMATION

OPERATING MODES

The LTC9101-2B/LTC9102 controls up to 48 independent channels, each of which can operate in one of three modes: manual, semi-auto, or auto. A fourth mode, shutdown, disables the port (see [Table 9](#)).

Table 9. Operating Modes

MODE	AUTO MODE	PORT MODE	DETECT/ CLASS	POWER-UP	AUTOMATIC THRESHOLD ASSIGNMENT
Auto	1	11b	Enabled at Reset	Automatically	Yes
	0	11b	Host Enabled	Automatically	Yes
Semi-Auto	0	10b	Host Enabled	Upon Request	Yes
Manual	0	01b	Once Upon Request	Upon Request	Yes
Shutdown	0	00b	Disabled	Disabled	No

In manual mode, the port waits for instructions from the host system before taking any action. It runs a single detection or classification cycle when commanded to by the host, and reports the result in its Port Status register. The host system can command the port to apply or remove power at any time.

In semi-auto mode, the port repeatedly attempts to detect and classify any PD attached to it. It reports the status of these attempts back to the host, and waits for a command from the host before applying power to the port. The host must enable detection and classification. The detection and classification results must be valid for power to be applied.

Auto mode operates the same as semi-auto mode except it will automatically apply power to the port if detection and classification results are valid. Auto mode will autonomously set the 2P Police and I_{LIM-2P} values based on the PSE assigned Class. This operational mode may be entered by tying the PWRMD0 pin to V_{EE} through a resistor as listed in [Table 14](#), or by changing the operating mode register to Auto mode. See the [Auto Mode Maximum PSE Power](#) section.

In shutdown mode the port is disabled and will not detect, class, or power a PD.

Regardless of which mode it is in, the LTC9101-2B/LTC9102 will remove power automatically from any port that generates a fault. If disconnect detection is enabled, power will automatically be removed from any port that generates a disconnect event. The host controller may also command the port to remove power at any time.

Reset and PWRMD

The initial LTC9101-2B/LTC9102 configuration depends on the state of PWRMD0 during reset. Reset occurs at power-up, whenever RESET is pulled low, or when the global Reset All bit is set.

Changing the state of PWRMD0 after power-up will not change the port behavior of the LTC9101-2B/LTC9102 until a reset occurs. The PWRMD1 pin is reserved for future use.

With auto mode enabled via R_{PWRMD} , each port will detect and classify repeatedly until a PD is discovered. When a PD is discovered, the port sets 2P Police according to the PSE assigned Class, applies power to valid PDs, and removes power when a fault is detected.

[Table 10](#) shows the 2P Police value that is automatically set in auto mode, based on the PSE assigned Class. The DC Disconnect threshold is 7.0mA (typ) for all PSE assigned Classes and the 4P Police value has no effect.

Table 10. Typical Auto Mode Power On Thresholds

PSE ASSIGNED CLASS	2P POLICE (W)
0	15.5
1	4
2	7
3	15.5
4	30
CLASS 4+, TYPE 1 LIMITED	15.5

CONNECTION CHECK

Connection Check Overview

IEEE 802.3bt introduces connection check, a mechanism for 4-pair PSEs to discover a PD's signature configuration: single-signature, dual-signature, or an invalid (non-PD) result. The connection check result determines if and how a 4-pair capable PSE should provide 4-pair power.

In 802.3at, only one PD configuration was described; this is known as a single-signature PD and is shown in [Figure 36](#). A single-signature PD presents the same 25k detection resistor to both the pairsets in parallel.

New in 802.3bt is the dual-signature PD. A dual-signature PD presents two fully independent 25k detection signature resistors, one to each pairset.

802.3bt 2-pair PSEs—including the LTC9101-2B/LTC9102—do not perform connection check. Single- and dual-signature PDs are treated the same: the PSE detects, classifies, and applies power to a single pairset. High-power PDs are demoted by the PSE to a lesser allocated Class. Dual-signature PDs are allocated power on one pairset only.

DETECTION

Detection Overview

To avoid damaging network devices that were not designed to tolerate DC voltage, a PSE must determine whether the connected device is a valid PD before applying power. The IEEE 802.3 specifi-

APPLICATIONS INFORMATION

cation requires that a valid PD has a common-mode resistance of $25k \pm 5\%$ at any channel voltage below 10V. The PSE must accept resistances that fall between 19k and 26.5k, and it must reject resistances above 33k or below 15k (shaded regions in Figure 37). The PSE may choose to accept or reject resistances in the undefined areas between the must-accept and must-reject ranges. In particular, the PSE must reject standard computer Network Interface Cards (NICs), many of which have 150Ω common-mode termination resistors that will be damaged if power is applied to them (the black region at the left of Figure 37).




Figure 37. IEEE 802.3 Signature Resistance Ranges

Multipoint Detection

The LTC9101-2B/LTC9102 uses a multipoint method to detect PDs. False-positive detections are minimized by checking for signature resistance with both forced current and forced voltage measurements.

Initially, two test currents are forced onto the channel (via the OUTn pin) and the resulting voltages are measured. The detection circuitry subtracts the two V-I points to determine the resistive slope while removing offset caused by series diodes or leakage at the port (see Figure 38). If the forced current detection yields a valid signature resistance, two test voltages are then forced onto the channel and the resulting currents are measured and subtracted. Both methods must report valid resistances to report a valid detection. PD signature resistances between 17k and 29k (typically) are detected as valid and reported as Detect Valid in the corresponding Detection Status register. Values outside this range, including open and short circuits, are also reported. If the channel measures less than 1V during any forced current test, the detection cycle will abort and Short Circuit will be reported. Table 11 shows the possible detection results.

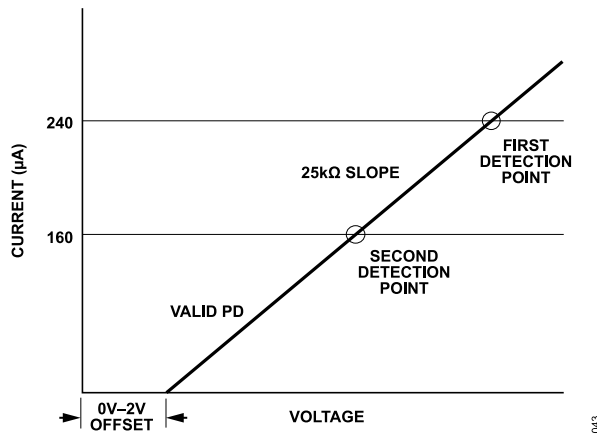


Figure 38. PD Detection

Table 11. Detection Status

MEASURED PD SIGNATURE (TYPICAL)	DETECTION RESULT
Incomplete or Not Yet Tested	Detect Status Unknown
$V_{PD} < 1V$	Short Circuit
$C_{PD} > 2.7\mu F$ or $V_{PD} > 10V$	C_{PD} Too High
$R_{PD} < 17k$	R_{SIG} Too Low
$17k < R_{PD} < 29k$	Detect Valid
$R_{PD} > 29k$	R_{SIG} Too High
$R_{PD} > 50k$	Open Circuit
PSE Detected	PSE Detected or Port is Precharged
MOSFET Fault	MOSFET Fault Detected

More on Operating Modes

The port's operating mode determines when the LTC9101-2B/LTC9102 runs a detection cycle. In manual mode, the port will idle until the host orders a detect cycle. It will then run detection, report the result, and return to idle to wait for another command.

In semi-auto mode the LTC9101-2B/LTC9102 autonomously polls a port for PDs, but it will not apply power until commanded to do so by the host. The Detection/Classification Status registers are updated at the end of each detection/classification cycle.

In semi-auto mode, if a valid signature resistance is detected and classification is enabled, the port will classify the PD and report that result as well. The port will then wait for at least 100ms, and will repeat the detection cycle to refresh the data in the Detection/Classification Status registers. The port will not turn on in response to a power-on command unless the current detect result is Detect Valid. Any other detect result will generate a t_{START} fault if a power-on command is received.

Behavior in auto mode is similar to semi-auto; however, after Detect Valid is reported and the port is classified, it is automatically powered on without host intervention. In auto mode, 2P Police and DC Disconnect are automatically set; see the Reset and PWRMD section for more information.

Detection is disabled for a port when the port is in shutdown mode, or when the corresponding Detect Enable bit is cleared.

Detection of Legacy PDs

Proprietary PDs that predate the original IEEE 802.3af standard are commonly referred to today as legacy PDs. One type of legacy PD uses a large common-mode capacitance ($>10\mu F$) as the detection signature.

Legacy PDs may be inferred by detection results. Legacy PDs are not automatically powered in Auto mode.

APPLICATIONS INFORMATION

CLASSIFICATION

802.3af (Type 1) Classification

A PD may optionally present a classification signature to the PSE to indicate the maximum power it will draw while operating. The IEEE specification defines this signature as a constant current draw when the PSE port voltage is in the V_{CLASS} range (between 15.5V and 20.5V) as shown in Figure 40, with the current level indicating one of five possible PD signatures. Figure 39 shows a typical PD load line, starting with the slope of the 25k signature resistor below 10V, then transitioning to the classification signature current (in this case, Class 3) in the V_{CLASS} range. Table 12 shows the possible classification values.

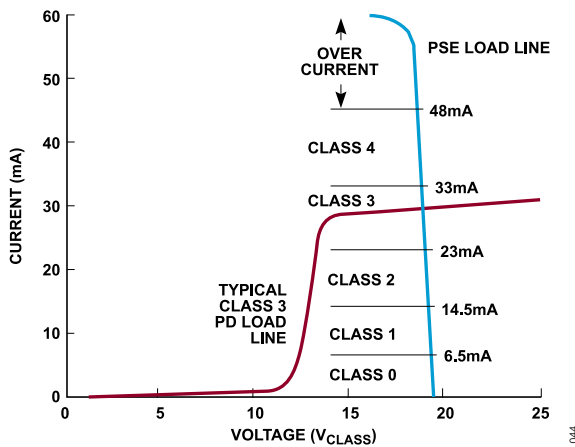


Figure 39. PD Classification

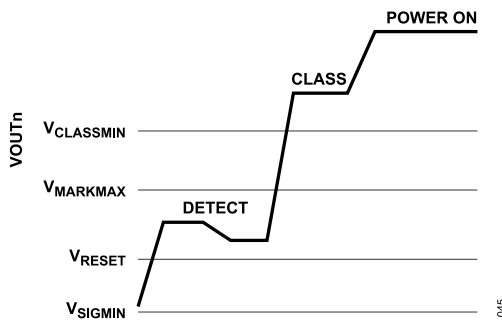


Figure 40. Type 1 or Type 2 PSE, 1-Event Class Sequence

Table 12. Type 1 and Type 2 PD Classification Values

CLASS	RESULT
Class 0	No Class Signature Present; Treat Like Class 3
Class 1	3.84W
Class 2	6.49W
Class 3	13W
Class 4	25.5W (802.3at, Type 2)

If classification is enabled, the PSE will classify the PD immediately after a successful detection cycle. The PSE measures the PD classification signature by applying V_{CLASS} to the port via $OUTn$

and measuring the resulting current; it then reports the PD request- ed Class in the appropriate Port Status register. In Auto mode the LTC9101-2B/LTC9102 sets 2P Police, Current Limit, and DC Disconnect thresholds accordingly.

Classification is disabled for a port when the port is in shutdown mode or when the corresponding Class Enable bit is cleared.

LLDP Classification

Introduced in 802.3at and extended by 802.3bt, the PoE specification defines a Link Layer Discovery Protocol (LLDP) method of classification. The LLDP method adds extra fields to the Ethernet LLDP data protocol.

Although the LTC9101-2B/LTC9102 is compatible with this classification method, it cannot perform LLDP classification directly since it does not have access to the data path. LLDP classification allows the host to perform LLDP communication with the PD and update the PD's power allocation. The LTC9101-2B/LTC9102 supports changing the 2P Police levels dynamically, enabling system-level LLDP support.

802.3at 2-Event Classification

In 802.3at, 802.3af classification is named Type 1 classification. The 802.3at standard introduces an extension of Type 1 classification: Type 2 (2-event) classification. Type 2 PSEs are required to perform classification.

A Type 2 PD requesting 25.5W presents class signature 4 during all class events. If a Type 2 PSE with 25.5W of available power measures class signature 4 during the first class event, it forces the PD to V_{MARK} (9V typical), pauses briefly, and issues a second class event as shown in Figure 41. The second class event informs the PD that the PSE has allocated 25.5W.

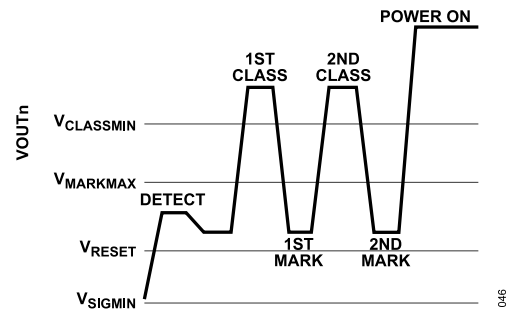


Figure 41. Type 2 PSE, 2-Event Class Sequence

Note that the second classification event only runs if required by the IEEE classification procedure. For example, a Class 0 to 3 PD will only be issued a single class event as shown in Figure 40.

The concept of demotion is introduced in 802.3at. A Type 2 PD may be connected to a PSE only capable of delivering 13W, perhaps due to power management limitations. In this case, the PSE will perform a single classification event as shown in Figure 40, and

APPLICATIONS INFORMATION

note that 25.5W is requested. Due to the limited power availability, the PSE will not issue a second event and proceeds directly to power on the PD. The presence of a single class event informs the Type 2 PD it has been demoted to 13W. If demoted, the PD is subject to power limitations and may operate in a reduced power mode.

802.3bt Multi-Event Classification

802.3bt introduces Type 3 and Type 4 classification. While Type 2 (802.3at) classification extends Type 1 (802.3af) classification, Type 3 and Type 4 classification supersede Type 1 and Type 2 classification. Type 1 and Type 2 classification are described in the preceding sections as a historical reference and to define common terminology such as power demotion, class events, mark events, and electrical parameters.

802.3bt defines eight PD Classes for single-signature PDs and five PD Classes for dual-signature PDs, as shown in Table 13.

Table 13. Type 3 and Type 4 PD Classifications by PD Configuration

SINGLE-SIGNATURE PDs		DUAL-SIGNATURE PDs	
CLASS	PD AVAILABLE POWER	CLASS	CHANNEL AVAILABLE POWER ¹
Class 1	3.84W	Class 1	3.84W
Class 2	6.49W	Class 2	6.49W
Class 3	13W	Class 3	13W
Class 4	25.5W	Class 4	25.5W
Class 5	40W	Class 5	35.6W
Class 6	51W		
Class 7	62W		
Class 8	71.3W		

¹ Dual-signature PD total available power is the sum of both channels available power. Class signatures may differ between channels of a port, for example, Class 3 + Class 4 = 13W + 25.5W = 38.5W.

The LTC9101-2B/LTC9102 implements 802.3bt classification as a Type 3 2-pair PSE.

802.3bt 2-pair PSEs are limited to a maximum assigned Class of Class 4. PDs requesting greater than Class 4 power will be demoted to Class 4 or Class 3, depending on the maximum power settings of the LTC9101-2B/LTC9102 port.

802.3bt 2-pair PSEs do not distinguish between single-signature and dual-signature PDs. Detection, classification, and power are applied over a single pairset (typically Alternative A). Single-signature PDs receive their requested power up to Class 4, and dual-signature PDs receive power up to Class 4 on one pairset only. See the [Connection Check Overview](#) section for additional information.

802.3bt 2-Pair Classification

802.3bt 2-pair PSEs issue a single classification event to Class 0 through 3 PDs. A Class 0 through 3 PD presents its class signature to the PSE and is then powered on if sufficient power is available. Power-limited 802.3bt PSEs may also issue a single classification event to Class 4 and higher PDs to demote those PDs to Class 3 (13W). See Figure 42.

802.3bt 2-pair PSEs issue two classification events to PDs requesting Class 4 and above, if sufficient power is available. PDs requesting Class 4 or greater present class signature 4 on both classification events. PDs requesting Class 5 and above are demoted to Class 4 (25.5W). See Figure 43.

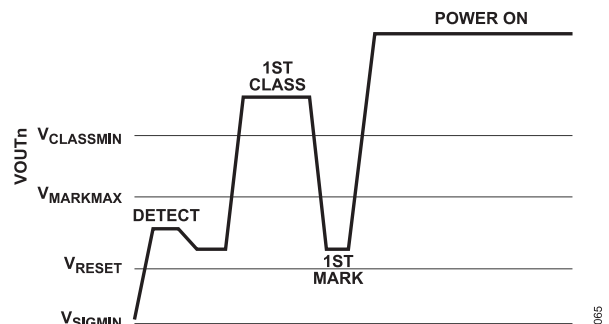


Figure 42. Type 3 2-Pair PSE, 1-Event Class Sequence

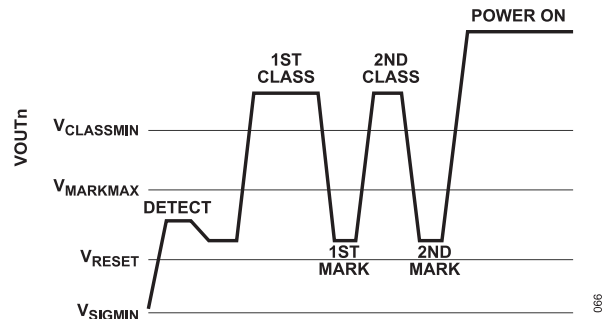


Figure 43. Type 3 2-Pair PSE, 2-Event Class Sequence

Invalid Multi-Event Classification Combinations

The 802.3bt specification defines a set of valid class signature combinations. All PDs return the same classification signature on the first two class events. Type 3 and 4 PDs modify the classification signature on all subsequent class events. For example, a single-signature Class 5 PD will respond to the class events 1, 2, 3, and 4 with a class signature of 4, 4, 0, and 0, respectively.

Any individual class signature that exceeds the class current limit is flagged as an invalid classification result. Any sequence of class signatures that does not represent a legal sequence based on PD configuration will likewise be flagged as an invalid classification result.

APPLICATIONS INFORMATION

Auto Mode Maximum PSE Power

In auto mode the LTC9101-2B/LTC9102 automatically detects, classifies and powers all connected valid PDs. In order to do this, each port must be configured for its maximum power allocation. Select the resistor R_{PWRMD} from [Table 14](#) that reflects the system's per-port maximum power delivery capability.

Connect the PWRMD0 pin of the LTC9102 at ID address 00b to V_{EE} through R_{PWRMD} . The PWRMD0 pin of the LTC9102 at ID address 01b, 10b, and 11b must be left floating. The PWRMD1 pin of each LTC9102 must be left floating. The PWRMD0 resistor is measured at reset.

The maximum power allocation is a reflection of the power supply and power path capability. The PWRMD0 resistor setting is applied to every port in this chipset, across all quads and ICs. Accordingly, the PWRMD0 resistor must be set with consideration for each port's power path capability and for the system's power supply capability.

The maximum power settings and other port controls may also be specified for each port individually by storing a custom configuration to the LTC9101-2B's internal flash storage. See the [Stored Configurations](#) section for further details.

Table 14. PWRMD0 Pin R_{PWRMD0} Configuration

MODE	R_{PWRMD} (k Ω)	PORT MODE		DETECT/ CLASS	2P/4P CONFIG
		0x12	ENABLE 0x14	0x14	
Disabled	Open	0000,0000b	0000,0000b	0000,0000b	0000,0000b
Class 3 (2P)	24.3	1111,1111b	1111,1111b	0000,0000b	0000,0000b
Class 4 (2P)	18.7	1111,1111b	1111,1111b	0011,0011b	0011,0011b

POWER CONTROL

The primary function of the LTC9101-2B/LTC9102 is to control power delivery to the PSE port. With the LTC9101-2B/LTC9102, a PSE port is composed of one power channel that controls the power delivery over a pairset.

The LTC9101-2B/LTC9102 delivers power by controlling the gate drive voltage of an external power MOSFET while monitoring the current (through an external sense resistor) and the output voltage (across the OUT pin).

The LTC9101-2B/LTC9102 connects the V_{EE} power supply to the PSE port in a controlled manner, meeting the power demands of the PD while minimizing power dissipation in the external MOSFET and disturbances to the V_{EE} backplane.

Inrush Control

When commanded to apply power to a port, the LTC9101-2B/LTC9102 ramps up the GATE pin of the corresponding channel, raising the external MOSFET gate voltage in a controlled manner.

During a typical inrush, the MOSFET gate voltage will rise until the external MOSFET is fully enhanced or the channel reaches the

inrush current limit ($I_{INRUSH-2P}$). $I_{INRUSH-2P}$ is set automatically by the PSE. $I_{INRUSH-2P}$ is 425mA (typical) per channel.

The GATE pin is servoed when channel current exceeds $I_{INRUSH-2P}$, actively limiting current to $I_{INRUSH-2P}$. When the GATE pin is not being servoed, the final V_{GS} is 12V (typical).

During inrush, the port runs a timer (t_{START}). The port stays in inrush until t_{START} expires. When t_{START} expires, the PSE inspects channel voltage and current. When the PSE is applying power to a PD, inrush is successful when the channel is sourcing current below $I_{INRUSH-2P}$.

If inrush is not successful, power is removed and the corresponding Start fault is set. Otherwise, the port advances to a power-on state, and the programmed current limiting thresholds are used as described in the [Current Limit](#) section.

Power Policing

The power policing threshold (2P Police) is monitored on a per-channel basis, up to 128W in 0.5W increments (typical). Per the IEEE specification, the LTC9101-2B/LTC9102 will allow the channel power to exceed the 2P Police threshold for a limited period of time before removing power from the channel.

When the 2P Police threshold is exceeded, the channel starts a t_{CUT} timer. If the channel power drops below the 2P Police threshold before the t_{CUT} timer expires, the t_{CUT} timer counts back down, but at 1/16 the rate that it counts up.

If the t_{CUT} timer reaches 65ms (typical), the channel is turned off and the corresponding P_{CUT} fault is set. This allows the channel to tolerate intermittent overload signals with duty cycles below about 6%; longer duty cycle overloads will remove power from the channel.

Current Limit

Each LTC9101-2B/LTC9102 channel includes an implicit current limiting threshold (I_{LIM-2P}) with a corresponding timer (t_{LIM}). The I_{LIM-2P} threshold is a function of the applied 2P Police threshold as shown in [Table 15](#). Note that 802.3bt 2-pair PSEs are limited to Class 4 output power; continuous operation above this threshold is not compliant to 802.3bt.

Table 15. I_{LIM} Values

2P POLICE	I_{LIM}
0.5W to 15.5W	425mA
16W to 45W	850mA

The LTC9101-2B/LTC9102 actively controls the MOSFET gate drive to keep the channel current below I_{LIM-2P} . The LTC9101-2B/LTC9102 I_{LIM-2P} threshold is implemented as a two-stage foldback circuit that reduces the channel current if the channel voltage falls below the normal operating voltage, which keeps the MOSFET power dissipation at safe levels. The I_{LIM-2P} current limiting circuit is always enabled and actively limiting channel current.

APPLICATIONS INFORMATION

The T_{LIM} register is used to adjust the t_{LIM} setting for each channel and is a minimum time. Two bits are assigned to each channel, as shown in Table 16. These bits are automatically set during startup in Auto mode. t_{LIM} can be adjusted while a channel is active.

Table 16. T_{LIM} Settings

FIELD	T_{LIM} (min)
00b (Default)	50ms
01b	15ms
10b	10ms
11b	6ms

When a channel I_{LIM} event occurs, power is removed from the channel and the port's I_{LIM} fault is set.

MOSFET Fault Detection

LTC9101-2B/LTC9102 PSE ports are designed to tolerate significant levels of abuse, but in extreme cases it is possible for an external MOSFET to be damaged. A failed MOSFET may short source to drain, which will make the port appear to be on when it should be off; this condition may also cause the sense resistor to fuse open, turning off the port but causing SENSE to rise to an abnormally high voltage. A failed MOSFET may also short from gate to drain, causing GATE to rise to an abnormally high voltage. OUT, SENSE and GATE are designed to tolerate up to 80V faults without damage.

If the LTC9101-2B/LTC9102 detects any of these conditions for more than 3.8ms (typical), it disables all port functionality, reduces the gate drive pull-down current for the port and reports a MOSFET Fault detection status. This is typically a permanent fault, but the host can attempt to recover by resetting the port, setting the port to shutdown mode, or by resetting the entire chip if a port reset fails to clear the fault. If the MOSFET is in fact bad, the fault will quickly return, and the port will disable itself again. The remaining ports of the LTC9101-2B/LTC9102 are unaffected.

An open or missing MOSFET will not trigger a MOSFET Fault detection status, but will cause a start fault if the LTC9101-2B/LTC9102 attempts to turn on the port.

Disconnect

The LTC9101-2B/LTC9102 monitors powered channels to ensure PDs draw their minimum specified current. The $I_{HOLD-2P}$ threshold (7mA, typical), monitored as the $V_{HOLD-2P}$ threshold across the 0.1Ω sense resistor, is used to determine if a PD has been disconnected.

Each port maintains a separate disconnect timer (t_{DIS}). The disconnect timer counts up when channel current is below the $I_{HOLD-2P}$ threshold, indicating that the PD is disconnected. When t_{DIS} expires, power is removed from the channel and the corresponding port disconnect fault is set. If the current increases above $I_{HOLD-2P}$ before t_{DIS} expires, the timer resets. As long as the PD exceeds the minimum current level before t_{DIS} expires, it will remain powered.

Although not recommended, the DC disconnect feature can be disabled by clearing the corresponding DC Disconnect Enable bits. Disabling the DC disconnect feature forces the LTC9101-2B/LTC9102 out of compliance with IEEE standards. A powered port remains powered after the PD is removed; the still-powered port may be subsequently connected to a non-PoE data device, potentially causing damage.

The LTC9101-2B/LTC9102 does not include AC disconnect circuitry. AC disconnect is not a supported feature of 802.3bt.

Fast Surge Recovery

High reliability systems demand excellent surge recovery. It is increasingly important for a PSE to minimize power disruption to the PDs during extreme power transients. Furthermore, PDs that do not meet minimum bulk capacitance requirements are particularly vulnerable to power brownouts with traditional PSE solutions. The LTC9101-2B/LTC9102 provides an improved hot swap responsiveness with excellent recovery from surge events.

During a surge event, the LTC9102 GATE pin quickly turns off the external MOSFET current flow to protect the PSE, the MOSFET, and downstream circuitry. As the surge dissipates, the LTC9102 quickly turns the MOSFET back on in a safe, current limited manner while minimizing power disruption to the PD. The LTC9102 fast MOSFET turn off and power recovery better support both IEEE compliant PDs and PDs with lower bulk capacitance in high reliability applications.

Autoclass

IEEE 802.3bt introduces a new optional feature, Autoclass. Autoclass enables the PSE to reclaim power budget from single-signature PDs requesting more power than needed under worst-case operating conditions. 802.3bt does not specify Autoclass for dual-signature PDs. The LTC9101-2B/LTC9102 fully supports Autoclass.

Prior versions of the 802.3 PoE standard specify minimum PSE output power for worst-case IR drop across the Ethernet cable and minimum PSE output voltage. However, a method for the PSE to reclaim over-allocated power is not specified. When a shorter Ethernet cable is used, or when the guaranteed PSE output voltage is above the specified minimum, the specified minimum PSE output power substantially over-allocates power to the PD.

An example PoE system is shown in two versions. Figure 44 shows a 100W four port PSE servicing three 25.5W PDs over 100meter cables. Such a system requires the PSE to allocate 25.5W per PD and a further 4.5W for each 100m cable's IR drop.

The total power allocation is:

$$3 \text{ Ports} \times (4.5W + 25.5W) = 90W$$

APPLICATIONS INFORMATION

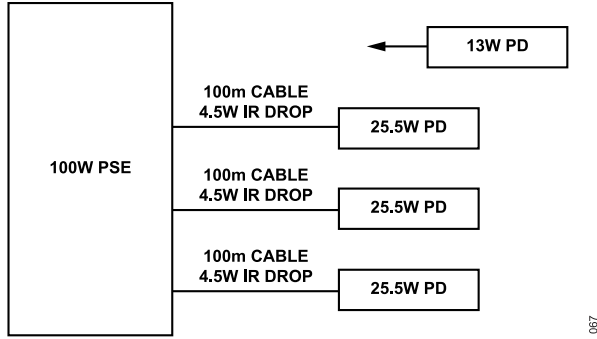


Figure 44. 100W PoE System with 100m Cables

If an additional 13W PD is plugged into the fourth PSE port, only 10W is available and the PD cannot be powered.

Figure 45 shows a 100W four port PSE servicing three 25.5W PDs over 10m cables. Such a system requires the PSE to allocate 25.5W per PD and a further ~0.5W for each 10m cable's IR drop.

Without Autoclass, the total power allocation is:

$$3 \text{ Ports} \times (4.5\text{W} + 25.5\text{W}) = 90\text{W}$$

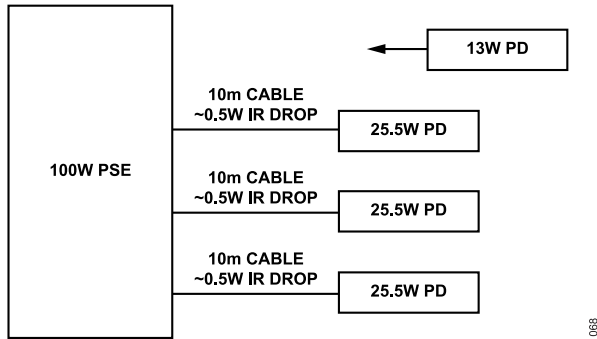


Figure 45. 100W PoE System with 10m Cables

If an additional 13W PD is plugged into the fourth PSE port, only 10W is available and the PD cannot be powered even though the IR drop is much less than in the prior example.

Assuming the system in Figure 45 is Autoclass-enabled, the recovered power budget can be used to power additional ports. During classification, the PSE observes the PD's Autoclass request. After power on is completed, the PD draws its maximum power while the PSE performs an Autoclass measurement, as specified by 802.3bt. The PSE in Figure 45 will measure and report 26W of power consumption for each of the three 25.5W PDs. This result allows the host to revise the PSE available power budget.

With Autoclass, the total power allocation for Figure 45 is:

$$3 \text{ Ports} \times 26\text{W (Measured)} = 78\text{W}$$

If an additional 13W PD is plugged into the fourth PSE port, a full 22W is now available and the PD can be successfully powered.

Autoclass Negotiation Procedure

A PSE may receive an Autoclass request from the PD by Physical Layer classification or LLDP (by way of the PSE host). For Physical Layer requests, the Autoclass negotiation procedure listed below is shown in Figure 46.

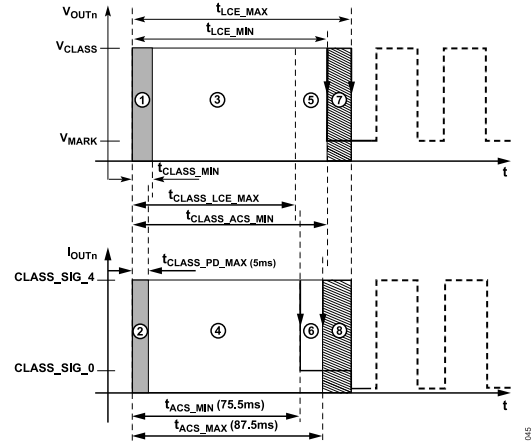


Figure 46. Autoclass Negotiation, Voltage and Current

1. PSE begins issuing the long first class event. The PD class signature is allowed to settle during this time.
2. The PD responds with a class signature corresponding to its Class. The class signature during this time period is unrelated to the Autoclass negotiation.
3. The PSE measures the PD class signature during this time and uses the result for the normal Multi-event Classification.
4. The PD continues presenting its class signature.
5. The PSE continues the long class event and does not measure the class signature current at this time.
6. The PD, if requesting Autoclass, transitions to class signature 0. If the PD is not requesting Autoclass it continues presenting its class signature.
7. The PSE measures the Autoclass response of the PD. If class signature 0 is measured, the PD is requesting Autoclass. When the measurement is complete the first class event is ended.
8. The PD continues holding the class signature selected in Step 6 until the end of the first class event.

Following the Autoclass negotiation procedure, PSE and PD continue Physical Layer classification and power up as normal. Regardless of Autoclass, the PD is required to operate below the negotiated power allocation corresponding to PD assigned Class.

Autoclass Measurement Procedure

Autoclass measurements may be requested by the PD through Physical Layer classification or, following power on, through LLDP. Although the LTC9101-2B/LTC9102 is compatible with LLDP-based Autoclass requests, it cannot receive LLDP Autoclass requests directly since it does not have access to the data path.

APPLICATIONS INFORMATION

If the PSE is commanded to perform an Autoclass measurement following a Physical Layer request, the measurement typically begins $t_{\text{AUTO_PSE1}}$ (1.5s typical) after port inrush is successfully completed. For LLDP-based Autoclass requests, the measurement begins immediately.

The Autoclass measurement period is $t_{\text{AUTO_PSE2}} - t_{\text{AUTO_PSE1}}$ (1.8s typical) using a sliding window of $t_{\text{AUTO_WINDOW}}$ (0.23s typical). During the Autoclass measurement period, the PSE continuously monitors I_{PORT} and V_{EE} , calculating maximum average power. Following the Autoclass measurement period, the Autoclass measurements are reported in the Port Parametric registers.

See the LTC9101-2B Software Interface guide for details on enabling Autoclass, the status of the Autoclass negotiation, reading Autoclass measurement results and dynamically requesting an Autoclass measurement.

Port Current Readback

The LTC9101-2B measures the current at each power channel with per-channel A/D converters. Note channel current is only valid when the power channel is on and reads zero at all other times. Samples are taken continuously and are reported as a 100ms average.

Port Voltage and V_{EE} Readback

The LTC9101-2B/LTC9102 continuously measures the V_{EE} voltage with a dedicated A/D converter. This global V_{EE} measurement is fully synchronized to all port current measurements and can monitor down to the LTC9102 UVLO threshold.

Temperature Readback

In addition to the over temperature fault in the supply event register, the LTC9101-2B also reports die temperature of each corresponding LTC9102.

Overtemperature Protection

Overtemperature protection automatically removes power from affected ports when LTC9102 temperature exceeds a preset threshold (150°C, typ). Ports are prevented from resuming operation until the die temperature drops below a preset recovery threshold (125°C, typ). See the LTC9101-2B Software Interface guide for details.

Over Supply Shutdown (OSS)

The LTC9101-2B provides a low latency port shedding feature to quickly reduce the system load when required. By allowing a preconfigured set of ports to be turned off, the current on an overloaded main power supply can be reduced rapidly while keeping high priority devices powered. An LTC9101-2B can be configured in either a 1-bit or 3-bit shutdown priority based on the Multibit Priority field.

In 1-bit priority mode each port can be configured to high or low priority. Specifically, if Multibit Priority is disabled, then Port Power Priority are followed for port priority and OSS action (i.e. legacy 1-bit priority). On a rising edge of the OSS pin, the low priority ports will be shut down within 6.5 μ s (typical). An OSS event shall set OSS event and Disconnect interrupt.

In 3-bit priority mode, e.g., Multibit Priority is enabled, each port can be configured to one of eight Multibit Power Priorities. When the host system wants a certain group of priority ports to be shut down, it will send the matching shutdown code on the OSS pin. The LTC9101-2B compares the shutdown code received on OSS with the Multibit Power Priority of each port and shuts down ports which are less than or equal to the flagged shutdown code (see [Figure 47](#)).

If a port is turned off via OSS, the corresponding Detection and Classification Enable bits remain unchanged and the port will resume operation as configured.

Port Remapping

The LTC9101-2B/LTC9102 support the ability to remap ports logically, which can be achieved by writing the appropriate values into the port remapping register to achieve the remapping (see [Table 17](#)). By default, there is no remapping.

Table 17. Port Remapping

CODE	REMAPPING
00b	Port 1
01b	Port 2
10b	Port 3
11b	Port 4

Within each quad, physical port remapping is unlimited; any physical port can be mapped to any logical port.

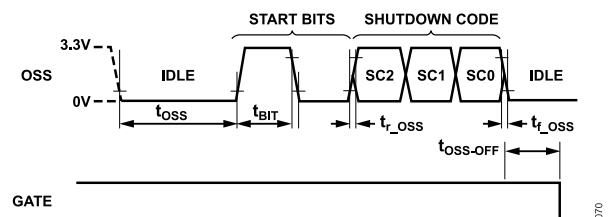


Figure 47. Multibit Priority Port Shutdown of Lower Priority Port

Code Download

LTC9101-2B firmware is field-upgradable by downloading and executing firmware images.

Contact Analog Devices for code download procedures and firmware images.

Firmware images are stored in a dedicated flash partition. A fully-compliant IEEE 802.3bt firmware image is pre-configured on the LTC9101-2B. The firmware image may be overwritten by the user.

APPLICATIONS INFORMATION

Two complete copies of the firmware image are maintained under separate ECC and CRC protection for maximum data protection.

Stored Configurations

Custom I²C register map initial values may optionally be stored in a dedicated flash partition (configuration package). When shipped from the factory, the LTC9101-2B contains a default configuration package where register map initial values are as specified in the LTC9101-2B Software Interface guide. Register map default configurations may be stored during manufacturing bring up or field-updated via configuration package download and will be auto-loaded at boot.

Contact ADI applications support for assistance in generating custom configuration packages. Configuration packages are downloaded using the same code download mechanisms as firmware packages. Package headers ensure configuration packages are verified and stored in the appropriate flash partition.

With a configuration package, the user may override the PWRMD0 pin and specify the maximum power level for each port. The user may override the AD[4:1] pins and specify the I²C chip addresses of each quad. The CFG[1:0] pins are still required to be set, as these pins inform the LTC9101-2B how many LTC9102s are attached.

Two identical copies of the configuration image are maintained under separate ECC and CRC protection for maximum data integrity.

SERIAL DIGITAL INTERFACE

Overview

The LTC9101-2B communicates with the host using a standard SMBus/I²C 2-wire interface. The LTC9101-2B is a subordinate device, and communicates with the host controller using standard SMBus protocols. Interrupts are signaled to the host via $\overline{\text{INT}}$. The timing diagrams (Figure 31 through Figure 35) show typical communication waveforms and their timing relationships. More information about the SMBus data protocols can be found at www.smbus.org.

Bus Addressing

The LTC9101-2B's primary 7-bit serial bus address is 01A₄A₃A₂A₁0b, with bits 4:1 set by AD[4:1] respectively. See Table 8 for device configuration options. Depending on device configuration, up to 12 I²C addresses will be populated from the I²C base address upwards. All LTC9101-2Bs also respond to the broadcast address 1111111b, allowing the host to write the same command (typically configuration commands) to multiple LTC9101-2Bs in a single transaction. If the LTC9101-2B is asserting $\overline{\text{INT}}$, it will also respond to the alert response address (0001100b) per the SMBus specification.

Each LTC9101-2B/LTC9102 is logically composed of multiple four port groups, known as quads, each packed into a single I²C address. See the [Device Configuration](#) section for details. For

example, if CFG[1:0] is set to 00, an LTC9101-2B is configured as a 12-port device when attached to an LTC9102 (see Table 8). This configuration requires consecutive I²C addresses, with quad offset 0 starting at the I²C base address.

Interrupts and SMBAlert

Most port events can be configured to trigger an interrupt, asserting $\overline{\text{INT}}$ and alerting the host to the event. This removes the need for the host to poll the LTC9101-2B, minimizing serial bus traffic and conserving host CPU cycles. Multiple LTC9101-2Bs can share a common $\overline{\text{INT}}$ line, with the host using the SMBAlert protocol (ARA) to determine which LTC9101-2B caused an interrupt.

Register Description

For information on serial bus usage and device configuration and status, refer to the LTC9101-2B Software Interface guide. To request the Software Interface guide, please complete the [Software Request Form](#).

ISOLATION REQUIREMENTS

IEEE 802.3 Ethernet specifications require that network segments (including PoE circuitry) be electrically isolated from the chassis ground of each network interface device. However, network segments are not required to be isolated from each other, provided that the segments are connected to devices residing within a single building on a single power distribution system.

If the PSE is part of a larger system, contains additional external non-Ethernet ports, or must be referenced to protective ground for some other reason, the PoE subsystem must be electrically isolated from the rest of the system.

The LTC9101-2B/LTC9102 chipset simplifies PSE isolation by allowing the LTC9101-2B chip to reside on the non-isolated side. There it can receive power from the main logic supply and connect directly to the I²C/SMBus bus. In this case, the SDAIN and SDAOUT pins can be tied together and will act as a standard I²C/SMBus SDA pin. Isolation between the LTC9101-2B and LTC9102 is implemented using a proprietary transformer-based communication protocol. Additional details are provided in the [High-Speed Data Interface](#) section of this data sheet.

For simple devices, such as unmanaged PoE switches, the isolation requirement can be met by using an isolated main power supply for the entire device. This strategy can be used if the device has no electrically conducting ports other than twisted-pair Ethernet. The LTC9101-2B may directly connect to the LTC9102s in the above circumstances, or if the system already provides isolation.

APPLICATIONS INFORMATION

EXTERNAL COMPONENT SELECTION

Power Supplies

The LTC9101-2B/LTC9102 requires two supply voltages to operate. V_{DD} requires 3.3V (nominally) relative to DGND, and V_{EE} requires a negative voltage of between $-51V$ to $-57V$ relative to AGND.

Digital Power Supply

V_{DD} provides digital power for the LTC9101-2B processor. A ceramic decoupling cap of at least $0.1\mu F$ should be placed from each V_{DD} to DGND, as close as practical to each LTC9101-2B. In addition, each LTC9101-2B must include a bulk cap of $10\mu F$ for robust surge immunity. A 1.2V core voltage supply is generated internally and requires a $1\mu F$ ceramic decoupling cap between the CAP1 pin and DGND and between CAP2 and DGND.

In systems using ADI's proprietary isolation, V_{DD} should be delivered by the host controller's non-isolated 3.3V supply. To maintain required isolation, LTC9102 AGND and LTC9101-2B DGND must not be connected. If using the direct connection scheme, the LTC9101-2B DGND must be connected to LTC9102 V_{EE} .

Main PoE Power Supply

V_{EE} is the main isolated PoE supply that provides power to the PDs. Because it supplies a relatively large amount of power and is subject to significant current transients, it requires more design care than a simple logic supply. For minimum IR loss and best system efficiency, set V_{EE} near maximum amplitude (57V), leaving enough margin to account for transient over or undershoot, temperature drift, and the line regulation specifications of the particular power supply used.

A bypass capacitor and a transient voltage suppressor (TVS) between each LTC9102 AGND and V_{EE} are very important for reliable operation. If a short circuit occurs at one of the output ports it can take as long as $1\mu s$ for the LTC9102 to begin regulating the current. During this time the current is limited only by the small impedances in the circuit; a high current spike typically occurs, causing a voltage transient on the V_{EE} supply and possibly causing the LTC9101-2B/LTC9102 to reset due to a UVLO fault. A $1\mu F$, 100V X7R capacitor

and a SMAJ58A near each LTC9102 are recommended to minimize spurious resets. An electrolytic bulk capacitor of at least $47\mu F$, 100V and a bulk TVS are also recommended per system.

LTC9102 Low Voltage Power Supplies

The LTC9102 includes internal voltage regulators that generate low voltage supplies directly from the main PoE power supply. At startup, an internal regulator generates 6V at PWRIN, drawing power from AGND. Internal 4.3V and 3.3V rails are sub-regulated from PWRIN. The PWRIN pin requires a local $1\mu F$, 100V bypass capacitor.

Pull-up resistors can be connected from PWRIN to AGND to dissipate heat outside the LTC9102 package. Optionally, an external power supply can be connected to PWRIN to override the startup regulator and reduce power dissipation.

Figure 48 shows a pull-up resistor configuration with the internal 3.3V regulator. Bypass resistors R1, R2, R3, and R4 draw heat away from the LTC9102s. Note that the voltage of the PWRIN pin changes based on the LTC9102 operating mode and its corresponding current consumption. If more current is consumed than the bypass resistors provide, the startup regulator maintains the voltage at 6V typical. The LTC9102 can operate without the pull-up resistors in space-constrained applications.

In applications with an external PWRIN supply, a 6.5V regulator provides an optimum voltage to override the internal 6V start-up regulator, while minimizing the LTC9102 device heating. The external supply may be shared across multiple LTC9102s.

A 3.3V power supply can be connected directly to the CAP3 pin, as shown in Figure 49. This provides the most power efficient sleep mode. When supplying external 3.3V power, tie the EXT3 pin to CAP3. This will disable the internal 3.3V regulator and prevent power back-feed. The 3.3V regulator must power up within $t_{CAP3EXT}$ specified in the electrical characteristics table.

If using the direct connection scheme, the 3.3V regulator that supplies the LTC9101-2B can also supply the LTC9102s. This is the preferred option when the LTC9101-2B and LTC9102 are on the same side of the system isolation barrier.

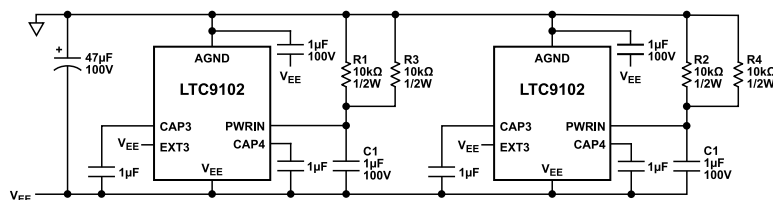


Figure 48. Power Supply Configuration with Internal 3.3V Supply

APPLICATIONS INFORMATION


Surge Protection

Ethernet ports can be subject to significant cable surge events. To keep PoE voltages below a safe level and protect the application against damage, protection components, as shown in Figure 52, are required at the main supply, at the LTC9102 supply pins, and at each port.

Bulk transient voltage suppression (TVS_{BULK}) and bulk capacitance (C_{BULK}) are required across the main PoE supply and should be sized to accommodate system level surge requirements.

Across each LTC9102 AGND pin and V_{EE} pin is a SMAJ58A 58V TVS (D1) and a 1µF, 100V bypass capacitor (C1). These components must be placed close to the LTC9102 pins.


Each port requires an S1B clamp diode from OUT_n to supply AGND. This diode steers harmful surges into the supply rails where they are absorbed by the surge suppressors and the V_{EE} bypass capacitance. The layout of these paths must be low impedance.

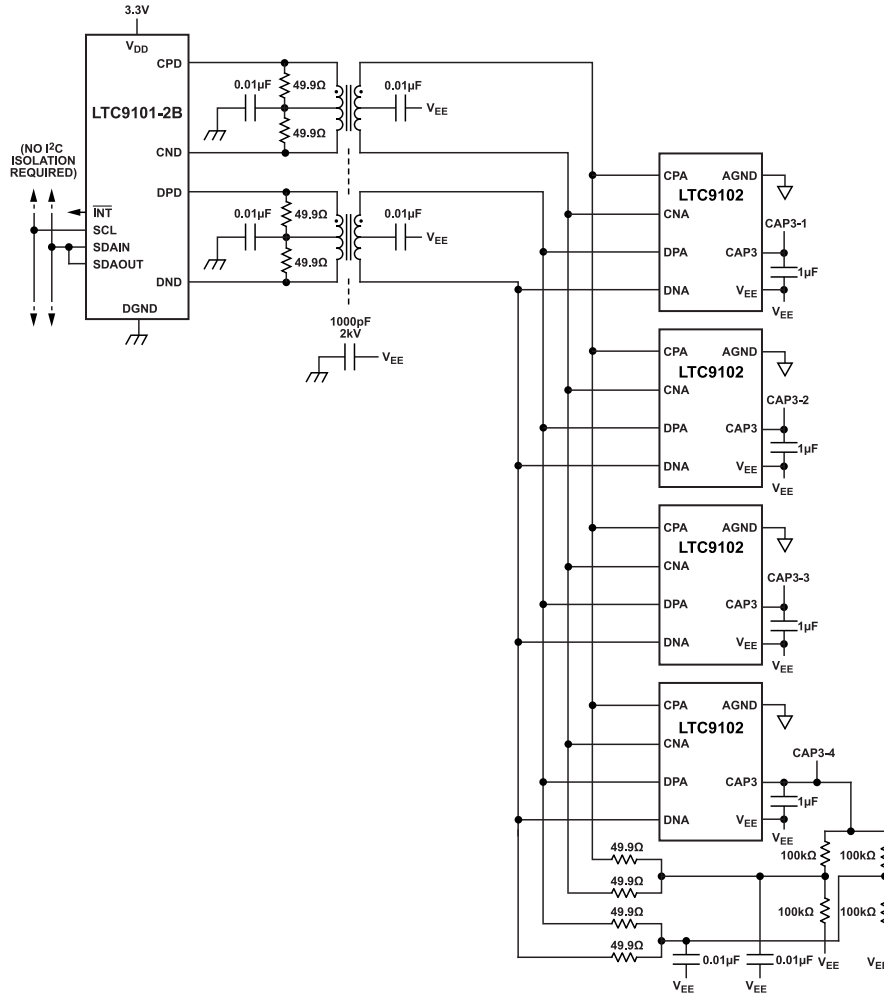

- NOTES
1. MULTIPLE LTC9102 DEVICES ON THE HIGH-SPEED DATA INTERFACE ARE DAISY CHAINED.
 2. THE HIGH-SPEED DATA INTERFACE IS TERMINATED AT BOTH ENDS.
 3. THE 100kΩ RESISTORS AT THE END OF THE HIGH-SPEED DATA INTERFACE CONNECT TO THE LAST LTC9102 CAP3.
 4. THE MAXIMUM LENGTH OF THE HIGH-SPEED DATA INTERFACE IS 24 INCHES.
 5. THE HIGH-SPEED DATA INTERFACE DIFFERENTIAL IMPEDANCE IS 100Ω.

Figure 50. LTC9101-2B/LTC9102 Proprietary Isolation Scheme

APPLICATIONS INFORMATION

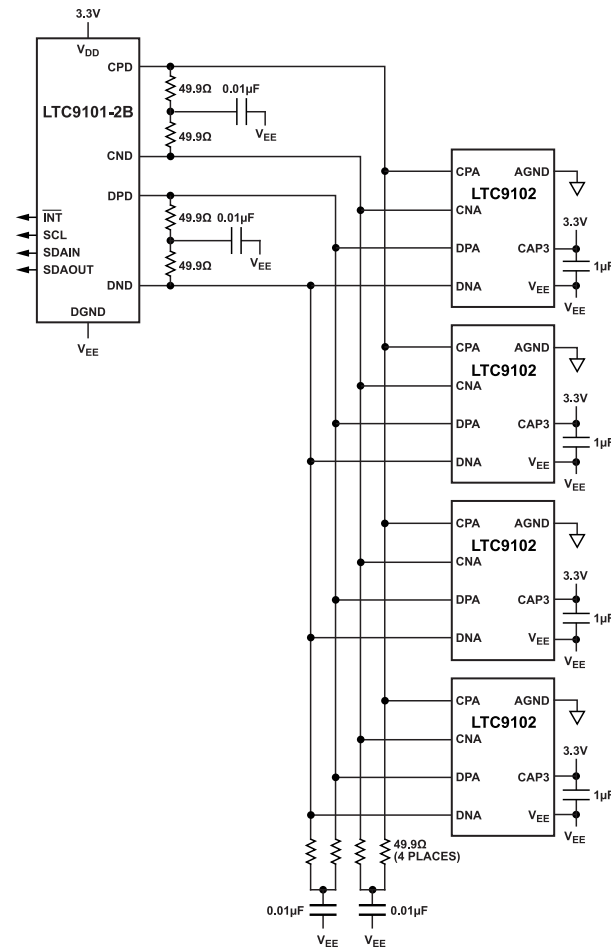

- NOTES
1. MULTIPLE LTC9102 DEVICES ON THE HIGH-SPEED DATA INTERFACE ARE DAISY CHAINED.
 2. THE HIGH-SPEED DATA INTERFACE IS TERMINATED AT BOTH ENDS.
 3. THE MAXIMUM LENGTH OF THE HIGH-SPEED DATA INTERFACE IS 24 INCHES.
 4. THE HIGH-SPEED DATA INTERFACE DIFFERENTIAL IMPEDANCE IS 100Ω.

Figure 51. LTC9101-2B/LTC9102 Direct Connection Scheme

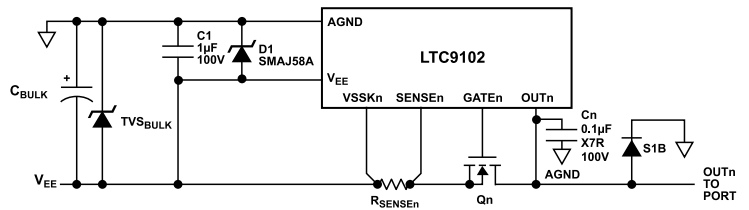


Figure 52. LTC9102 Surge Protection

Table 18. Component Selection for PSE Maximum Class

PSE CLASS	SENSE RESISTOR	HOT SWAP MOSFET	FUSE	ETHERNET TRANSFORMER
Class 3	100mΩ, 1%, 50mW	PSMN075-100MSE	SF-0603HI075F-2	7490220120
Class 4	100mΩ, 1%, 100mW	PSMN075-100MSE	SF-0603HI100F-2	7490220121

APPLICATIONS INFORMATION

LAYOUT REQUIREMENTS

Strict adherence to board layout, parts placement and routing requirements is critical for IEEE compliance, parametric measurement accuracy, system robustness and thermal dissipation. Refer to the DC3160A-KIT demo kit for example layout references.

Kelvin Sense

Proper connection of the port current Kelvin sense lines is important for current threshold accuracy and IEEE compliance. Refer to [Figure 53](#) for an example layout of these Kelvin sense lines. The LTC9102 VSSKn pin is Kelvin connected to the sense resistor (V_{EE} side) pad and is not otherwise connected to V_{EE} copper areas. Similarly, the LTC9102 SENSEn pin is Kelvin connected to the sense resistor (SENSEn side) pad and is not otherwise connected in the power path. [Figure 53](#) shows the two Kelvin traces from the LTC9102 to the sense resistor (R_{SENSEn}).

High-Speed Data Interface Layout

The LTC9101-2B/LTC9102 chipset communicates across a proprietary high-speed, multidrop data interface, which allows for a single LTC9101-2B to control up to four LTC9102 devices.




Figure 53. R_{SENSE} Kelvin Connections

The data lines require impedance matched traces to each LTC9102. The data bus termination resistors must be located at the LTC9102 farthest away from the isolation transformers. For isolated applications, the DC biasing resistors must connect to the LTC9102 CAP3 pin, farthest away from the isolation transformers. As shown in [Figure 50](#) and [Figure 51](#), design the interface with 100Ω differential transmission lines and terminate 100Ω s differentially. Limit the high-speed data interface line length to 24 inches. Minimize the transmission stubs between the LTC9102s and the high-speed data interface.

TYPICAL APPLICATIONS


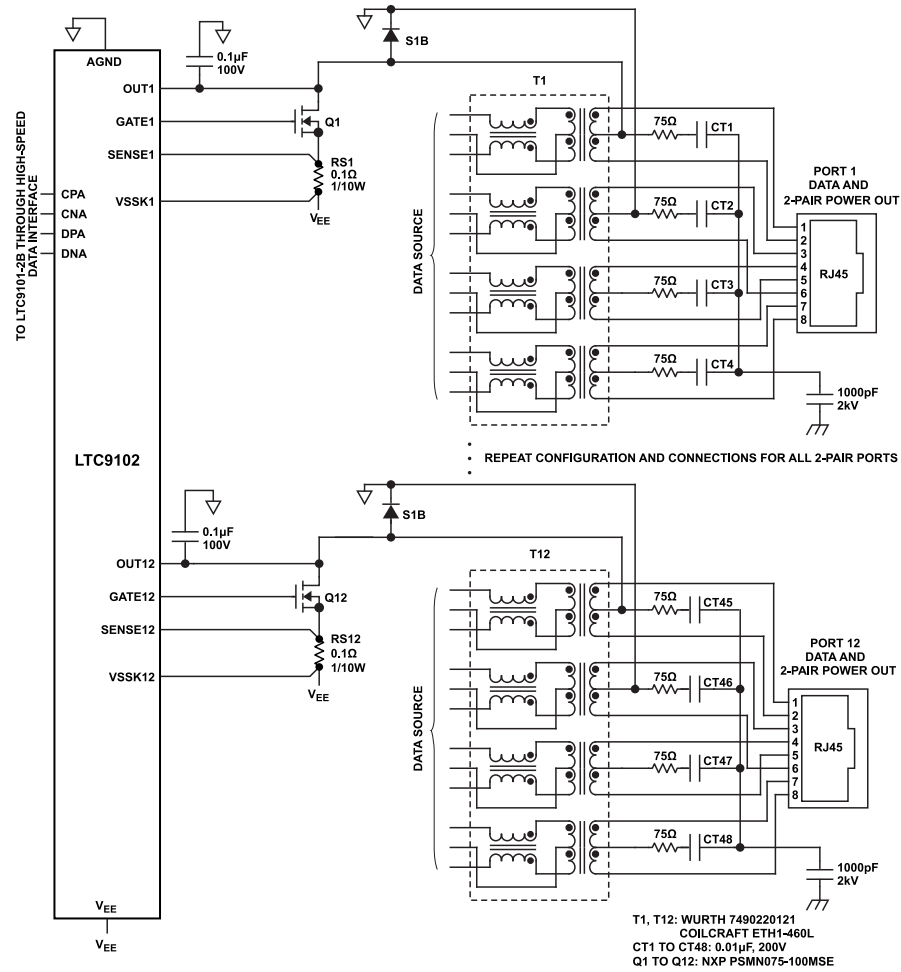


Figure 54. Alternative A (MDI-X) and B(S), 1000BASE-T, IEEE 802.3bt Type 3 2-Pair PSE, Ports 1 and 12 Shown


PACKAGE DESCRIPTION

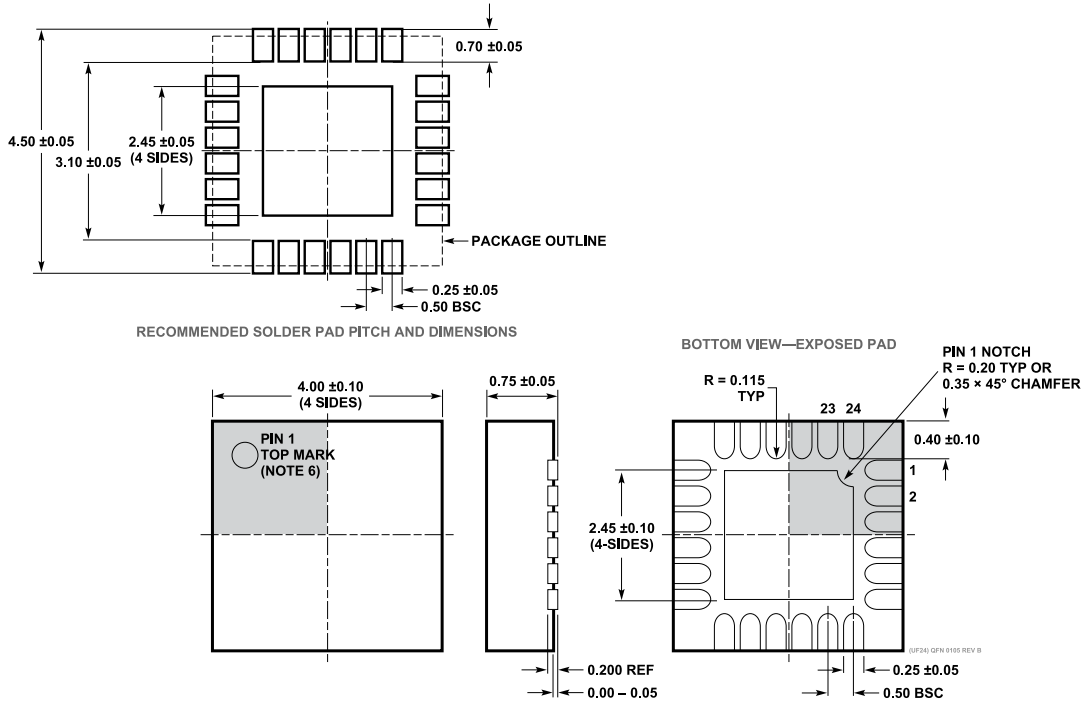

- NOTE:
1. DRAWING PROPOSED TO BE MADE A JEDEC PACKAGE OUTLINE MO-220 VARIATION (WGDD-X)—TO BE APPROVED
 2. DRAWING NOT TO SCALE
 3. ALL DIMENSIONS ARE IN MILLIMETERS
 4. DIMENSIONS OF EXPOSED PAD ON BOTTOM OF PACKAGE DO NOT INCLUDE MOLD FLASH. MOLD FLASH, IF PRESENT, SHALL NOT EXCEED 0.15mm ON ANY SIDE, IF PRESENT
 5. EXPOSED PAD SHALL BE SOLDER PLATED
 6. SHADED AREA IS ONLY A REFERENCE FOR PIN 1 LOCATION ON THE TOP AND BOTTOM OF PACKAGE

Figure 55. UF Package
 24-Lead Plastic QFN (4mm × 4mm)
 (Reference LTC DWG 05-08-1697 Rev B)

PACKAGE DESCRIPTION

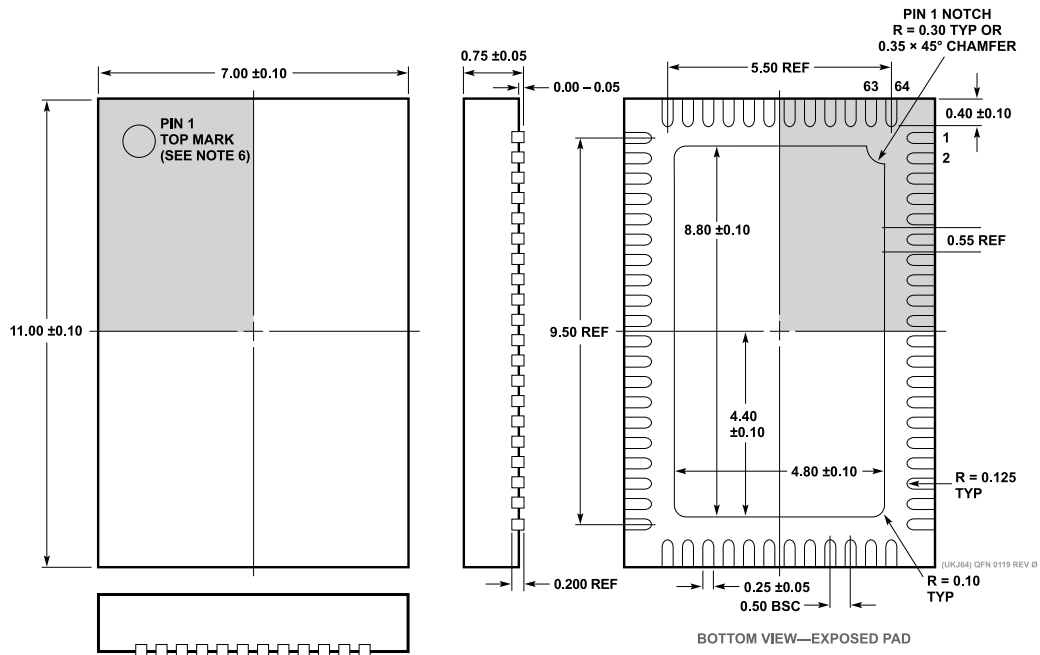

- NOTE:
1. DRAWING IS NOT A JEDEC PACKAGE OUTLINE
 2. DRAWING NOT TO SCALE
 3. ALL DIMENSIONS ARE IN MILLIMETERS
 4. DIMENSIONS OF EXPOSED PAD ON BOTTOM OF PACKAGE DO NOT INCLUDE MOLD FLASH. MOLD FLASH, IF PRESENT, SHALL NOT EXCEED 0.20mm ON ANY SIDE
 5. EXPOSED PAD SHALL BE SOLDER PLATED
 6. SHADED AREA IS ONLY A REFERENCE FOR PIN 1 LOCATION ON THE TOP AND BOTTOM OF PACKAGE

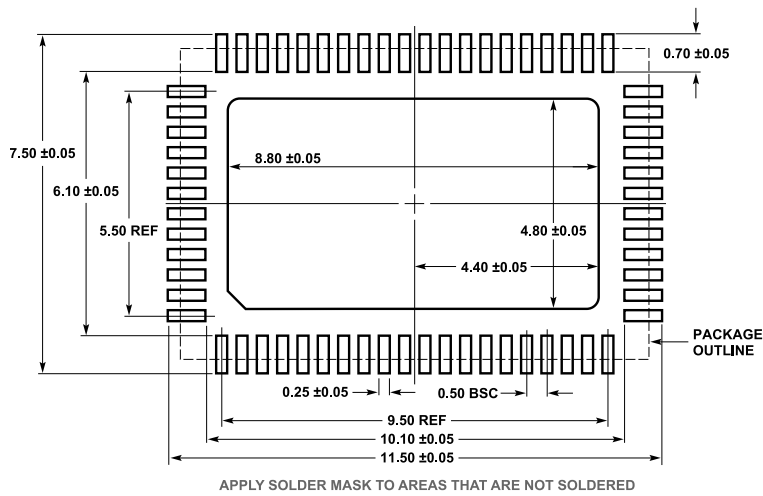


Figure 56. UKJ Package
 64-Lead Plastic QFN (7mm x 11mm)
 (Reference LTC DWG 05-08-1780 Rev 0)

