
Automotive 36V, 8A/10A Fully Integrated Buck Converters with 10µA Quiescent Current and Dual-Phase Capability

MAX20408/MAX20410/
MAX20408E/MAX20410E

General Description

The MAX20408/MAX20410/MAX20408E/MAX20410E are automotive, highly-integrated synchronous buck converters with internal high-side and low-side switches. The ICs deliver up to 8A/10A with input voltages from 3.0V to 36V. The voltage quality can be monitored by the PGOOD signal.

The MAX20408/MAX20410/MAX20408E/MAX20410E can operate in dropout mode by running at 99% duty cycle, making them ideal for automotive and industrial applications.

The MAX20408/MAX20410/MAX20408E/MAX20410E offer programmable or fixed output voltage options. High switching frequency at 2.1MHz and 400kHz options allow for small external components, reduced output ripple, and guarantee no AM interference. SYNC input programmability enables three modes for optimized performance: forced-PWM (FPWM) mode, skip mode with ultra-low quiescent current, and synchronization to an external clock. The spread-spectrum option minimizes EMI radiated emissions. The MAX20408E/MAX20410E feature reduced output capacitor requirement, windowed PGOOD, improved output voltage accuracy, and EN threshold accuracy.

The MAX20408/MAX20410/MAX20408E/MAX20410E also come with dual-phase capability, allowing up to 20A designs. Two ICs can be configured as a controller and target with dynamic current sharing and 180° out-of-phase operation.

The MAX20408/MAX20410/MAX20408E/MAX20410E are available in small 3.5mm x 3.75mm, 17-pin and 15-pin FC2QFN packages. The FC2QFN package is pin-to-pin compatible with the MAX20404/MAX20405/MAX20406 (4A to 6A) family of products.

Applications

- Automotive Supplies
 - Infotainment Systems
 - Advanced Driver-Assistance Systems (ADAS)
- Industrial Supplies
- General-Purpose Buck Converters

Benefits and Features

- High-Power DC-DC Converter in Small Solution Size
 - 8A/10A Maximum Output Current
 - 400kHz and 2.1MHz Fixed Frequency Options
 - Fixed 2.5ms Soft-Start Time
 - 34ns Minimum On-Time
 - Programmable 0.8V to 10V Output with 400kHz, 0.8V to 6V Output with 2.1MHz, or Fixed Output Options
 - $\pm 1\%$ Output Voltage Accuracy (MAX20408E/MAX20410E)
 - Accurate EN Threshold for Programmable UVLO (MAX20408E/MAX20410E)
 - Symmetric and Balanced SUP and PGND Pinout Placement for Superior EMI Performance
 - Thermally-Enhanced 3.5mm x 3.75mm, 17-Pin and 15-Pin FC2QFN Packages
- High Efficiency at All Load Ranges
 - 10µA Quiescent Current in Skip Mode
 - Up to 94.3% Efficiency at 12V_{IN}/5V_{OUT}/2.1MHz
 - Up to 95.6% Efficiency at 12V_{IN}/5V_{OUT}/400kHz
- Dual-Phase Operation up to 20A Load Capability
 - Frequency Synchronization Input/Output
 - 180° Out-of-Phase Between Controller and Target
 - Dynamic Current Sharing
- Robust for Automotive Environment
 - Forced-PWM and Skip-Mode Operation
 - 99% Duty Cycle Operation with Low Dropout Voltage
 - Supports 42V Load Dump
 - Spread-Spectrum Option
 - Windowed Power-Good Indicator (MAX20408E/MAX20410E)
 - Overtemperature and Short-Circuit Protection
 - -40°C to +125°C Automotive Temperature Range
 - AEC-Q100 Qualified
- Scalable Power Solution
 - Footprint Compatible with MAX20404/MAX20405/MAX20406

[Ordering Information](#) appears at end of data sheet.

Simplified Block Diagram

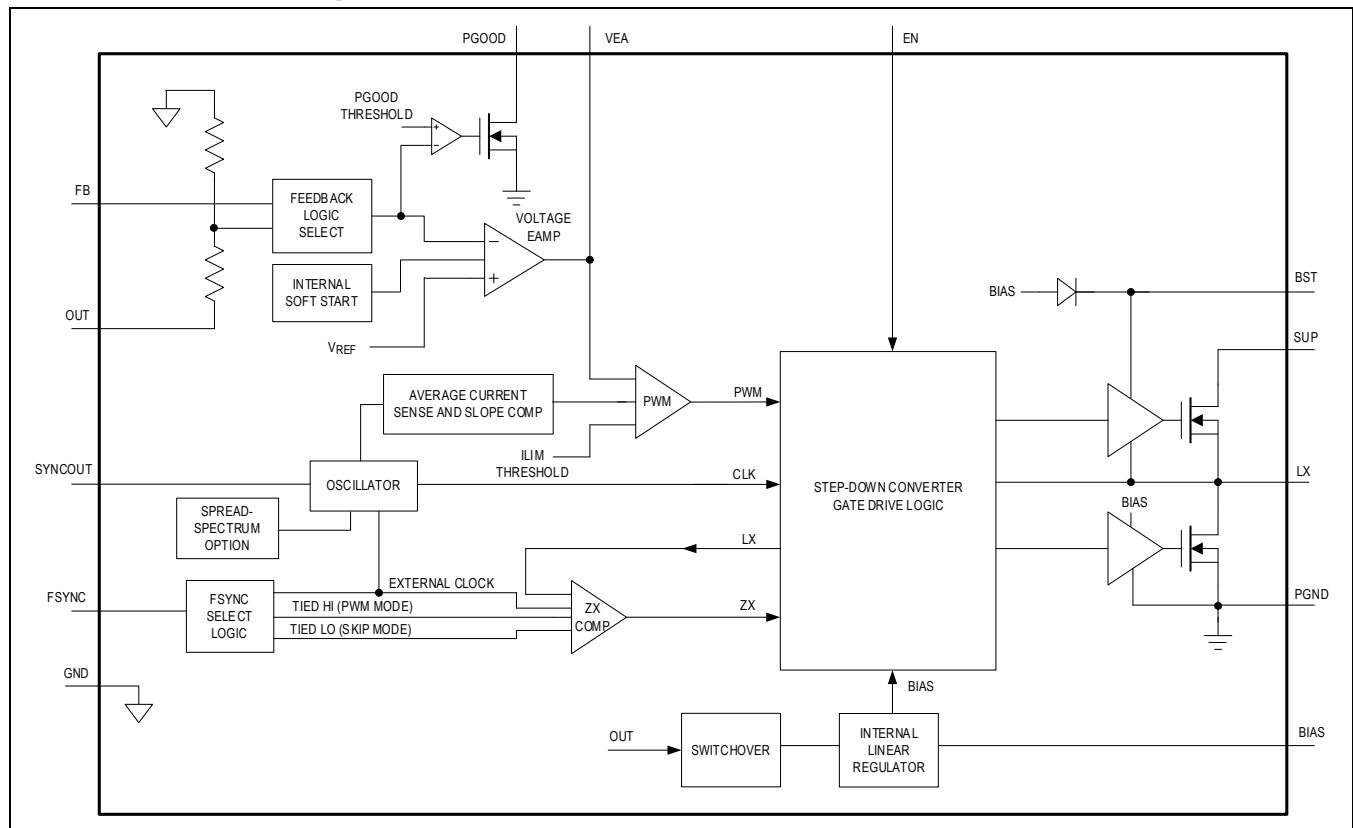


TABLE OF CONTENTS

| | |
|--|----|
| General Description | 1 |
| Applications..... | 1 |
| Benefits and Features..... | 1 |
| Simplified Block Diagram | 2 |
| Absolute Maximum Ratings | 6 |
| Recommended Operating Conditions..... | 6 |
| Package Information | 6 |
| 17 FC2QFN | 6 |
| Electrical Characteristics..... | 7 |
| Typical Operating Characteristics | 10 |
| Pin Configurations..... | 13 |
| Pin Descriptions | 14 |
| Detailed Description..... | 15 |
| Linear Regulator Output (BIAS) | 15 |
| Synchronization Input (SYNC) | 15 |
| Enable Input (EN)..... | 15 |
| Soft-Start | 15 |
| Short-Circuit Protection | 16 |
| Power-Good Indicator (PGOOD)..... | 16 |
| Spread-Spectrum Option..... | 16 |
| Thermal Shutdown Protection | 16 |
| Dual-Phase Operation | 16 |
| Low- I_Q Operation in Dual-Phase Operation..... | 16 |
| Applications Information..... | 17 |
| Setting the Output Voltage | 17 |
| Setting the Output Voltage in Dual-Phase Operation | 18 |
| Input Capacitor | 18 |
| Selecting the Inductor..... | 19 |
| Output Capacitor | 19 |
| PCB Layout Guidelines | 20 |
| Typical Application Circuits | 22 |
| Ordering Information | 24 |
| Revision History | 26 |

LIST OF FIGURES

| | |
|---|----|
| Figure 1. Typical Application Circuit for Dual-Phase Configuration with External Resistor-Divider | 18 |
| Figure 2. PCB Layout Example..... | 21 |

LIST OF TABLES

| | |
|---|----|
| Table 1. Configurations for Low- I_Q Operation | 17 |
| Table 2. Recommended Component Selection with Resistor-Divider Output Voltage Setting | 17 |
| Table 3. Recommended Inductor and Output Capacitor for Fixed Output Voltage Setting | 19 |

Absolute Maximum Ratings

| | |
|-----------------------------------|----------------------|
| SUP, EN to PGND | -0.3V to +42V |
| BST to LX | -0.3V to +2.2V |
| BST to PGND | -0.3V to +44V |
| LX to PGND | -0.3V to SUP + 0.3V |
| SYNC, SYNCOUT, PGOOD to GND | -0.3V to +6V |
| FB, VEA to GND | -0.3V to BIAS + 0.3V |
| OUT to GND | -0.3V to +16V |
| PGND to GND | -0.3V to +0.3V |

| | |
|---|-----------------|
| BIAS to GND | -0.3V to +2.2V |
| LX Continuous RMS Current | 10A |
| Continuous Power Dissipation ($T_A = +70^\circ\text{C}$, derate 37mW/°C above $+70^\circ\text{C}$) | 2963mW |
| Operating Junction Temperature | -40°C to +150°C |
| Storage Temperature Range | -65°C to +150°C |
| Lead Temperature (soldering 10s) | +300°C |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Recommended Operating Conditions

| PARAMETER | SYMBOL | CONDITION | TYPICAL RANGE | UNIT |
|---------------------------|--------|-----------|---------------|------|
| Ambient Temperature Range | | | -40 to +125 | °C |

Note: These limits are not guaranteed.

Package Information**17 FC2QFN**

| Package Code | F173A3FY+4 | |
|---|---------------------------|----------------|
| Outline Number | 21-100294 | |
| Land Pattern Number | 90-100104 | |
| THERMAL PARAMETERS | 4-LAYER JEDEC BOARD | 4-LAYER EV KIT |
| Junction-to-Ambient Thermal Resistance (θ_{JA}) | 38.6°C/W | 27°C/W |
| Junction-to-Case (top) Thermal Resistance (θ_{JCT}) | 26.7°C/W | — |
| Junction-to-Case (bottom) Thermal Resistance (θ_{JCb}) | 7.7°C/W | 8.5°C/W |
| Junction-to-Board Thermal Resistance (θ_{JB}) | 16.3°C/W | 9.9°C/W |
| Junction-to-Top Characterization Parameter (ψ_{JT}) | 1.75°C/W | 0.91°C/W |
| Junction-to-Board Characterization Parameter (ψ_{JB}) | 15.9°C/W | 7.9°C/W |

15 FC2QFN

| Package Code | F153A3FY+3 | |
|---|---------------------------|----------------|
| Outline Number | 21-100732 | |
| Land Pattern Number | 90-100253 | |
| THERMAL PARAMETERS | 4-LAYER JEDEC BOARD | 4-LAYER EV KIT |
| Junction-to-Ambient Thermal Resistance (θ_{JA}) | 38.8°C/W | 28.8°C/W |
| Junction-to-Case (top) Thermal Resistance (θ_{JCT}) | 21.7°C/W | — |
| Junction-to-Case (bottom) Thermal Resistance (θ_{JCb}) | 11.26°C/W | 10.52°C/W |
| Junction-to-Board Thermal Resistance (θ_{JB}) | 16.36°C/W | 12.53°C/W |
| Junction-to-Top Characterization Parameter (ψ_{JT}) | 2.93°C/W | 3.11°C/W |
| Junction-to-Board Characterization Parameter (ψ_{JB}) | 16.34°C/W | 12.6°C/W |

For the latest package outline information and land patterns (footprints), go to www.analog.com/en/design-center/packaging-quality-symbols-footprints/package-index.html. Note that a “+”, “#”, or “-” in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to www.analog.com/en/resources/technical-articles/thermal-characterization-of-ic-packages.html.

Electrical Characteristics

($V_{SUP} = V_{EN} = 14V$, $T_J = -40^{\circ}C$ to $+150^{\circ}C$, unless otherwise noted. Typical values are at $T_A = +25^{\circ}C$ under normal conditions, unless otherwise noted. ([Note 1](#), [Note 2](#)))

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---------------------------|-----------------------|---|------|------|------|-------|
| Supply Voltage Range | V_{SUP} | | 3.0 | | 36 | V |
| Supply Current | I_{SUP_SHDN} | $V_{EN} = 0$, $T_A = +25^{\circ}C$ | | 4 | 6 | µA |
| | I_{SUP} | $V_{EN} = 1$, $V_{OUT} = 3.3V$, $V_{FB} = V_{BIAS}$, no load, no switching | | 10 | | |
| SUP Undervoltage Lockout | | Rising | 2.9 | 3.0 | 3.2 | V |
| | | Falling | 2.6 | 2.7 | 2.9 | |
| BIAS Voltage | | $+2.5V \leq V_{SUP} \leq +36V$ | | 1.8 | | V |
| BIAS Undervoltage Lockout | V_{BIAS_UVLO} | Rising | 1.58 | 1.63 | 1.68 | V |
| | $V_{BIAS_UVLO_HYS}$ | Hysteresis | | 50 | | mV |

BUCK CONVERTER

| | | | | | | | |
|---------------------------------|---------------------|--|-------------------------|-------|-----|-------|---|
| Output Voltage Accuracy | $V_{OUT_SKIP_5V}$ | $V_{OUT} = 5.0V$, skip mode, no load | MAX20408/ MAX20410 | 4.92 | 5 | 5.05 | V |
| | | | MAX20408E/ MAX20410E | 4.93 | 5 | 5.05 | |
| | $V_{OUT_PWM_5V}$ | $V_{OUT} = 5.0V$, PWM mode, no load | MAX20408/ MAX20410 | 4.93 | 5 | 5.06 | |
| | | | MAX20408E/ MAX20410E | 4.95 | 5 | 5.05 | |
| | $V_{OUT_SKIP_4V}$ | $V_{OUT} = 4.0V$, skip mode, no load | MAX20408/ MAX20410 | 3.93 | 4 | 4.04 | |
| | | | MAX20408/ MAX20410 | 3.94 | 4 | 4.04 | |
| | $V_{OUT_PWM_4V}$ | $V_{OUT} = 4.0V$, PWM mode, no load | MAX20408/ MAX20410 | 3.23 | 3.3 | 3.34 | |
| | | | MAX20408E/ MAX20410E | 3.245 | 3.3 | 3.335 | |
| | $V_{OUT_PWM_3V3}$ | $V_{OUT} = 3.3V$, skip mode, no load | MAX20408/ MAX20410 | 3.24 | 3.3 | 3.35 | |
| | | | MAX20408E/ MAX20410E | 3.265 | 3.3 | 3.335 | |
| Adjustable Output Voltage Range | | $V_{OUT} = 3.9V$, skip mode, no load | MAX20408/ MAX20410 | 3.84 | 3.9 | 3.95 | V |
| | | $V_{OUT} = 3.9V$, PWM mode, no load | MAX20408/ MAX20410 | 3.85 | 3.9 | 3.95 | |
| | | $f_{SW} = 2.1MHz$ | | 0.8 | | 6 | |
| FB Voltage Accuracy | V_{FB_PWM} | PWM mode, no load | | 0.8 | | 10 | V |
| | | | $f_{SW} = 400kHz$ | 0.8 | | 10 | |
| FB Leakage Current | I_{FB} | $V_{FB} = 0.8V$, $T_A = +25^{\circ}C$ | | 100 | | nA | |

($V_{SUP} = V_{EN} = 14V$, $T_J = -40^{\circ}C$ to $+150^{\circ}C$, unless otherwise noted. Typical values are at $T_A = +25^{\circ}C$ under normal conditions, unless otherwise noted. [\(Note 1\)](#), [\(Note 2\)](#))

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|------------------|--|--------|-----|--------|-----------|
| High-Side Switch On-Resistance | R_{DSON_HS} | $V_{BIAS} = 1.8V$, $I_{LX} = 5A$ | | 25 | 50 | $m\Omega$ |
| Low-Side Switch On-Resistance | R_{DSON_LS} | $V_{BIAS} = 1.8V$, $I_{LX} = 5A$ | | 12 | 24 | $m\Omega$ |
| High-Side Switch Current-Limit Threshold | I_{LIM} | MAX20408/MAX20408E | 10 | 12 | 14 | A |
| | | MAX20410/MAX20410E | 11.9 | 14 | 16 | |
| Low-Side Switch Negative Current-Limit Threshold | I_{NEG} | | | -4 | | A |
| LX Leakage Current | I_{LX_LKG} | $V_{SUP} = 36V$, $V_{LX} = 0V$ or $V_{LX} = 36V$, $T_A = +25^{\circ}C$ | -5 | | +5 | μA |
| Soft-Start Ramp Time | t_{SS} | | | 2.5 | | ms |
| Minimum On-Time ((Note 3)) | t_{ON} | | | 34 | 60 | ns |
| Maximum Duty Cycle | | Dropout mode | 98 | 99 | | % |
| SWITCHING FREQUENCY | | | | | | |
| PWM Switching Frequency | f_{SW} | 2.1MHz | 1.925 | 2.1 | 2.275 | MHz |
| | | 400kHz | 360 | 400 | 440 | kHz |
| SYNC External Clock Frequency | f_{SYNC} | $f_{SW} = 2.1MHz$ | 1.7 | | 2.6 | MHz |
| | | $f_{SW} = 400kHz$ | 360 | | 600 | kHz |
| Spread-Spectrum Range | | Percentage of f_{SW} | | ±3 | | % |
| PGOOD OUTPUT | | | | | | |
| PGOOD Threshold | V_{PGOOD_R} | Percentage of V_{OUT} , rising | 92 | 94 | 96 | % |
| | | MAX20408E/MAX20410E, percentage of V_{OUT} , rising | 102.75 | 105 | 107.25 | |
| | V_{GOOD_F} | Percentage of V_{OUT} , falling | 91 | 93 | 95 | |
| | | MAX20408E/MAX20410E, percentage of V_{OUT} , falling | 101.75 | 104 | 106.25 | |
| PGOOD Debounce | t_{DEB} | PWM mode, 2.1MHz option, falling | | 50 | | μs |
| PGOOD High Leakage Current | I_{PGOOD_LKG} | $T_A = +25^{\circ}C$ | | | 1 | μA |
| PGOOD Low Voltage Level | V_{PGOOD_LOW} | Sinking 1mA | | | 0.4 | V |
| LOGIC LEVELS | | | | | | |
| EN High Voltage Level | V_{EN_HIGH} | MAX20408/MAX20410 | 1.2 | | | V |
| | | MAX20408E/MAX20410E | 0.825 | 0.9 | 0.975 | |
| EN Low Voltage Level | V_{EN_LOW} | MAX20408/MAX20410 | | 0.5 | | V |
| | | MAX20408E/MAX20410E | 0.625 | 0.7 | 0.775 | |
| EN Input Current | I_{EN} | $V_{EN} = V_{SUP} = 36V$, $T_A = +25^{\circ}C$ | | 1 | | μA |
| SYNC High Voltage Level | V_{SYNC_HIGH} | | | 1.4 | | V |
| SYNC Low Voltage Level | V_{SYNC_LOW} | | | | 0.4 | V |
| SYNC Input Current | $I_{IN,SYNC}$ | $T_A = +25^{\circ}C$ | | 1 | | μA |

($V_{SUP} = V_{EN} = 14V$, $T_J = -40^{\circ}C$ to $+150^{\circ}C$, unless otherwise noted. Typical values are at $T_A = +25^{\circ}C$ under normal conditions, unless otherwise noted. ([Note 1](#), [Note 2](#)))

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|------------------------------|-----------------|------------|-----|-----|-----|-------|
| SYNCOUT Output Voltage Level | $V_{SYNCOUT}$ | No load | 2.6 | 3.3 | 3.9 | V |
| THERMAL PROTECTION | | | | | | |
| Thermal Shutdown | T_{SHDN} | | | 175 | | °C |
| Thermal Shutdown Hysteresis | T_{SHDN_HYS} | | | 20 | | °C |


Note 1: All units are 100% production tested at $+25^{\circ}C$. All temperature limits are guaranteed by design and characterization.













Note 2: The device is designed for continuous operation up to $T_J = +125^{\circ}C$ for 95,000 hours and $T_J = +150^{\circ}C$ for 5,000 hours.


Note 3: Guaranteed by design, not production tested.

Typical Operating Characteristics

($T_A = +25^\circ\text{C}$, unless otherwise noted.)

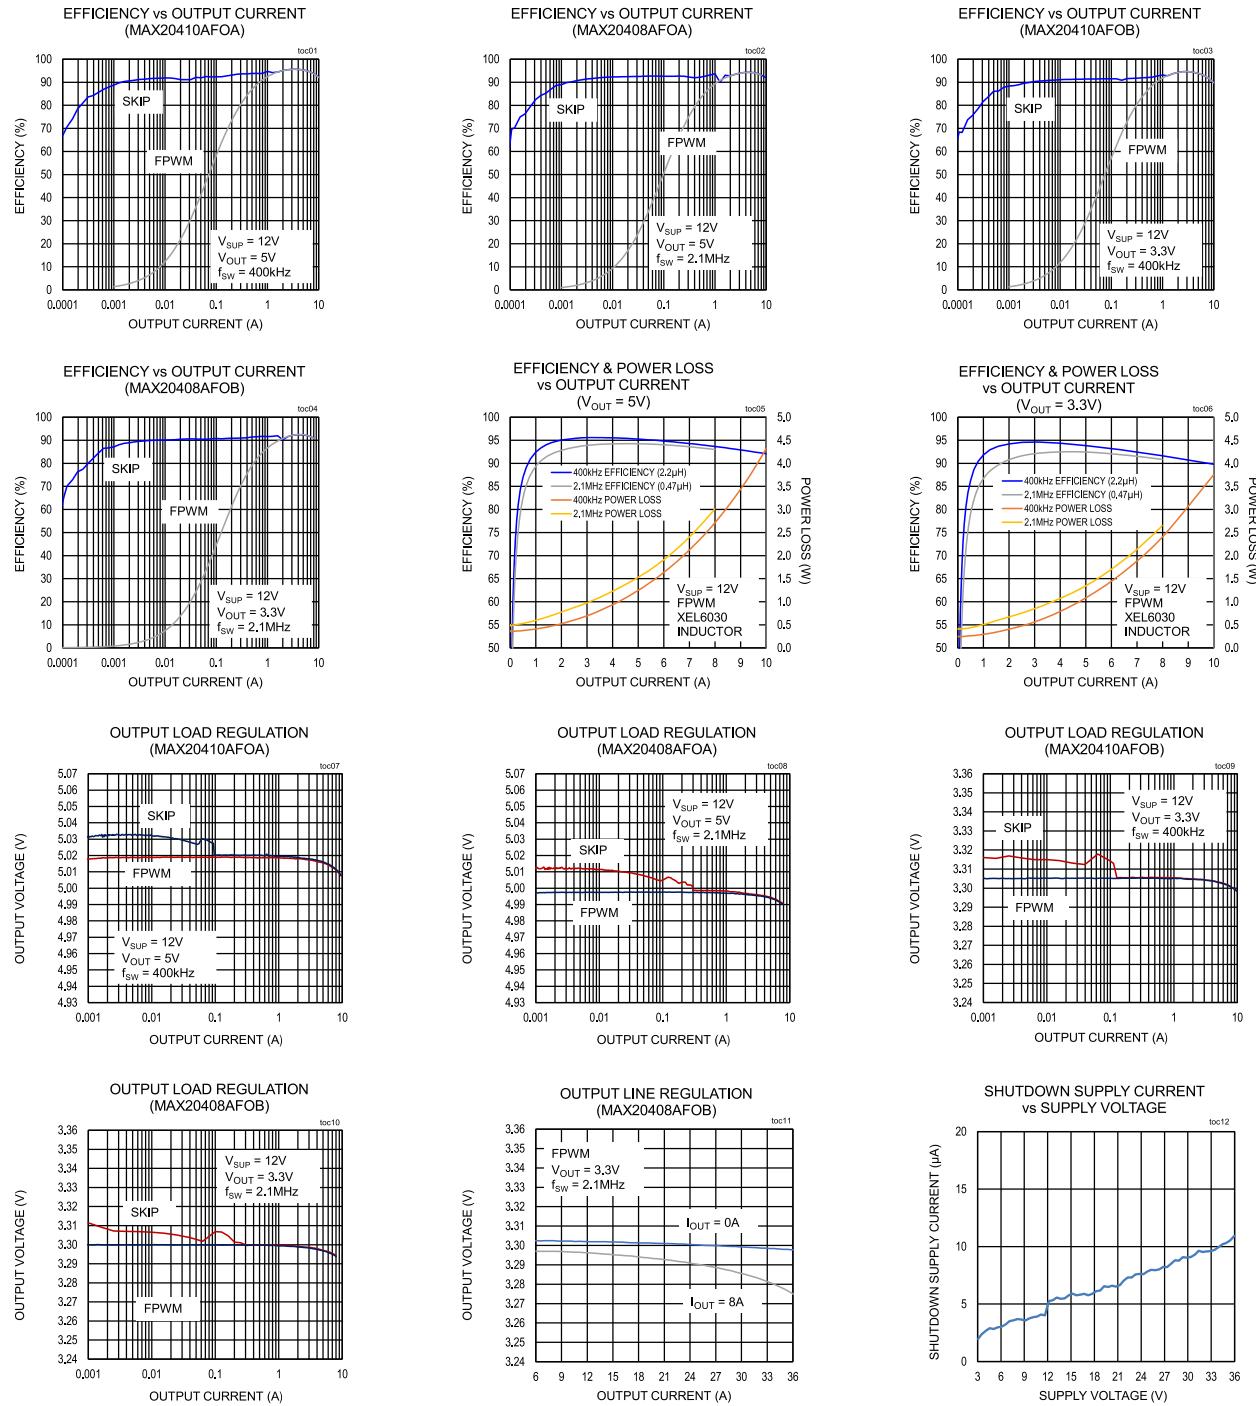


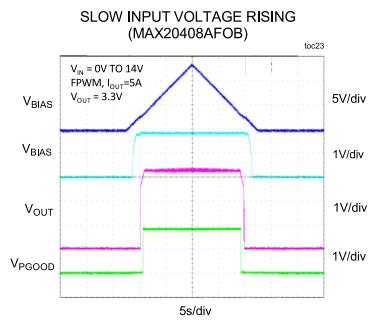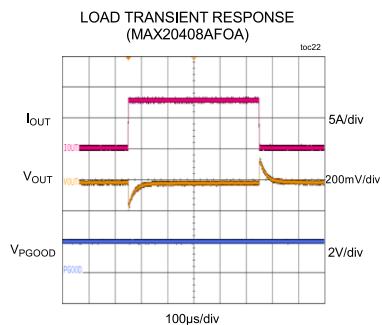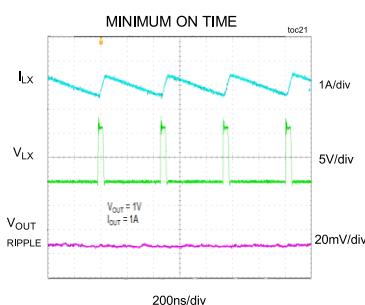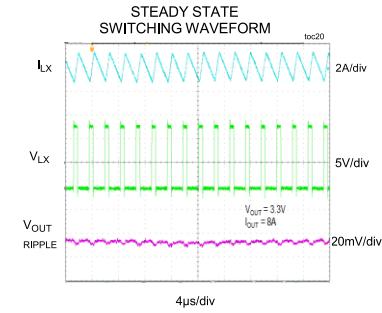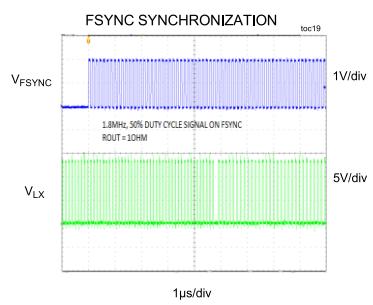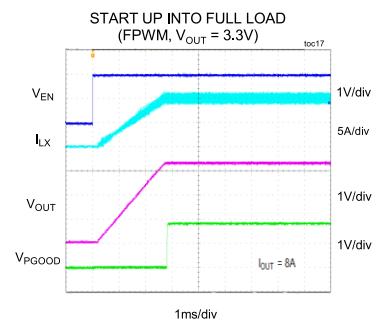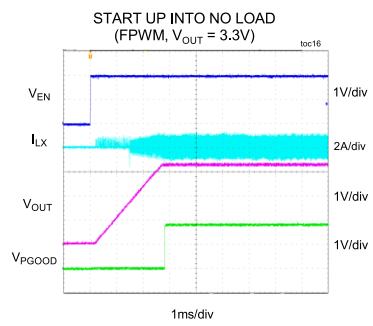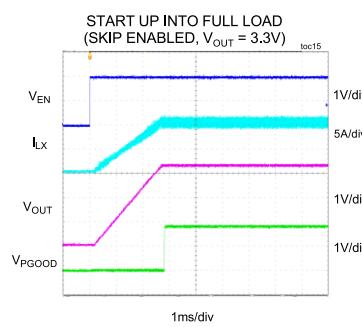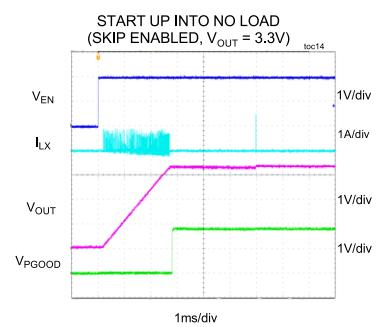

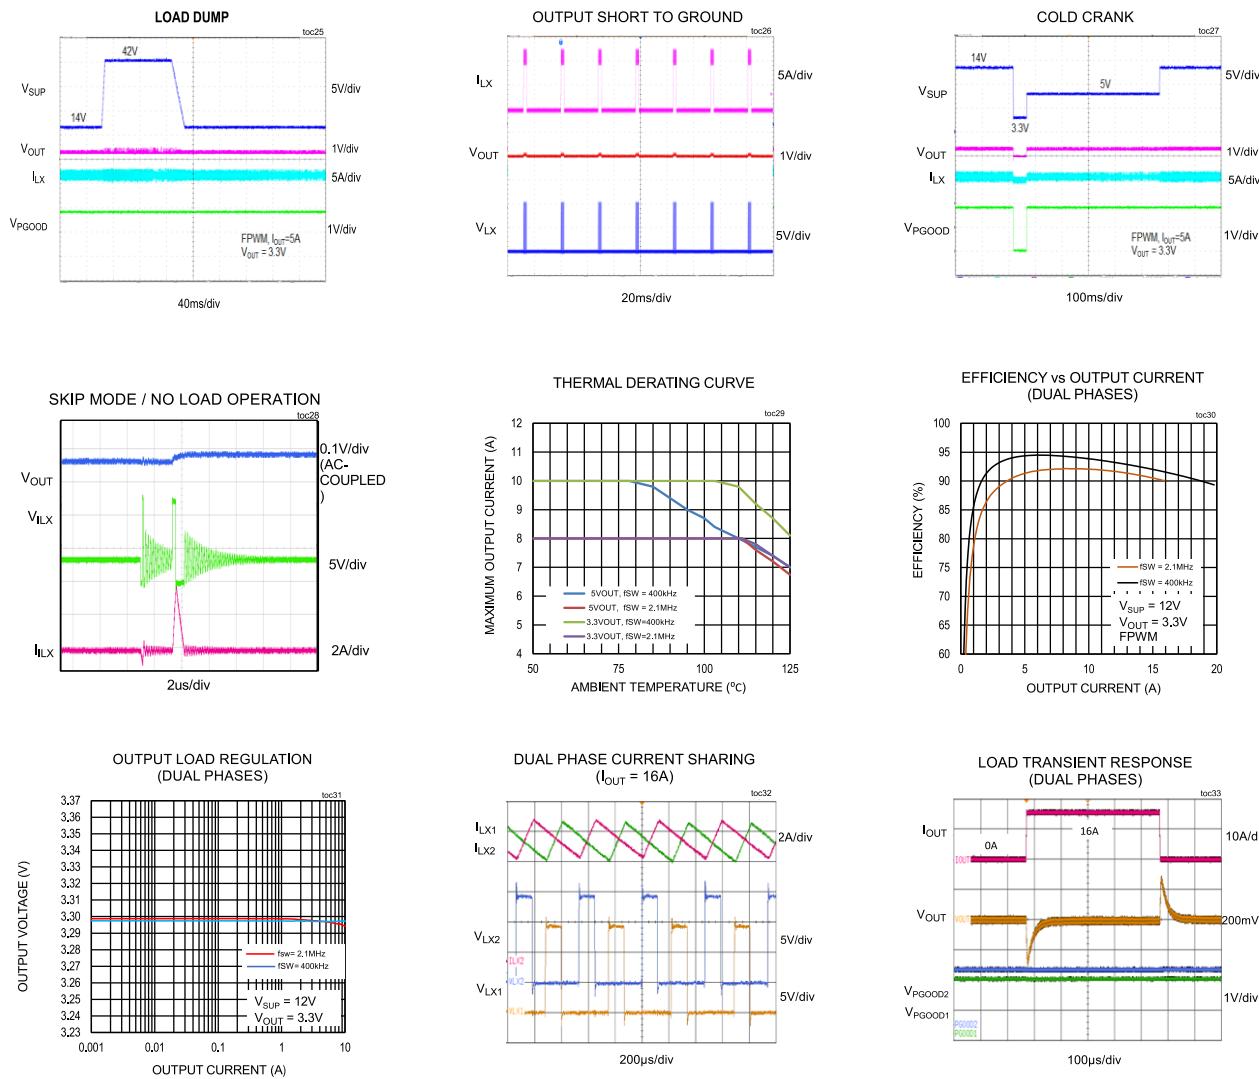


Pin Configurations

MAX20408AFO/MAX20410AFO/MAX20408EAFO/MAX20410EAFO

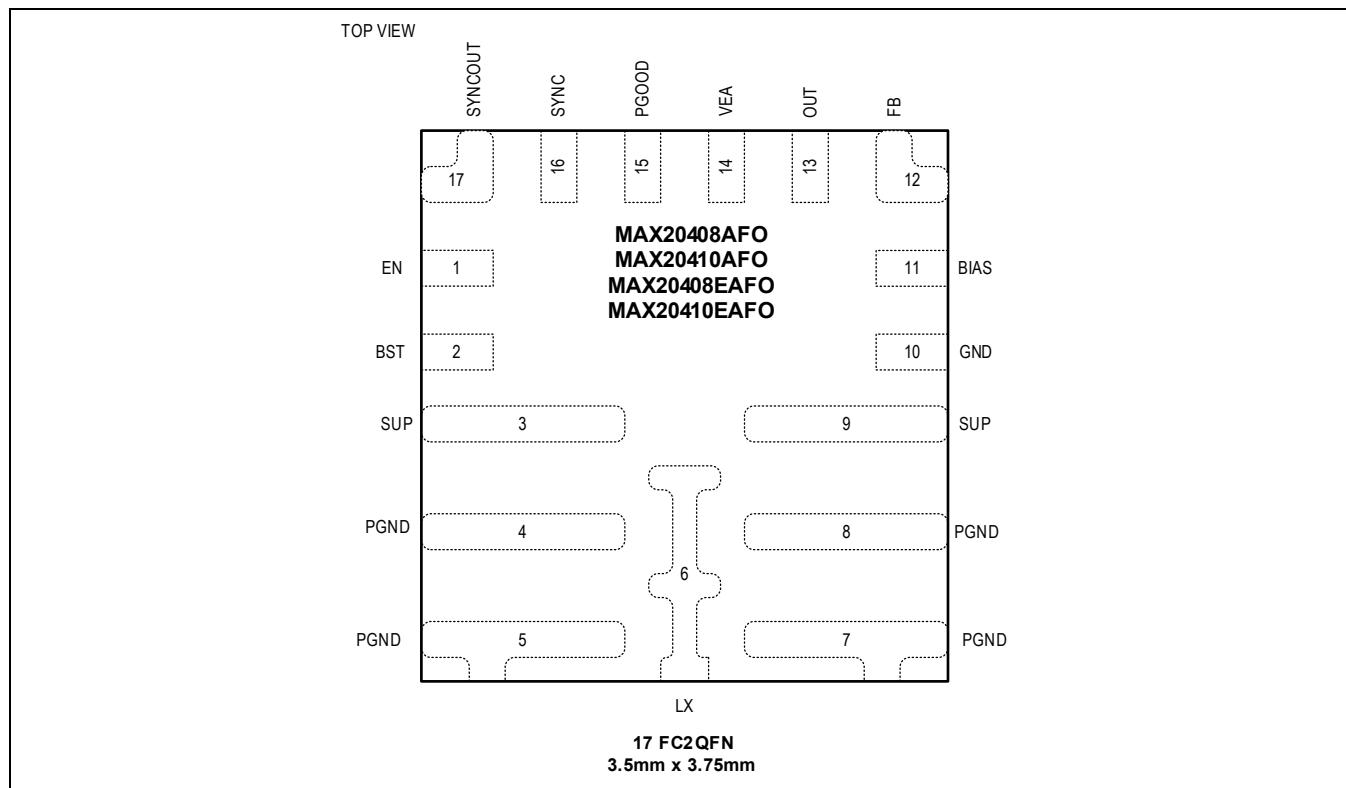

MAX20408EAFL

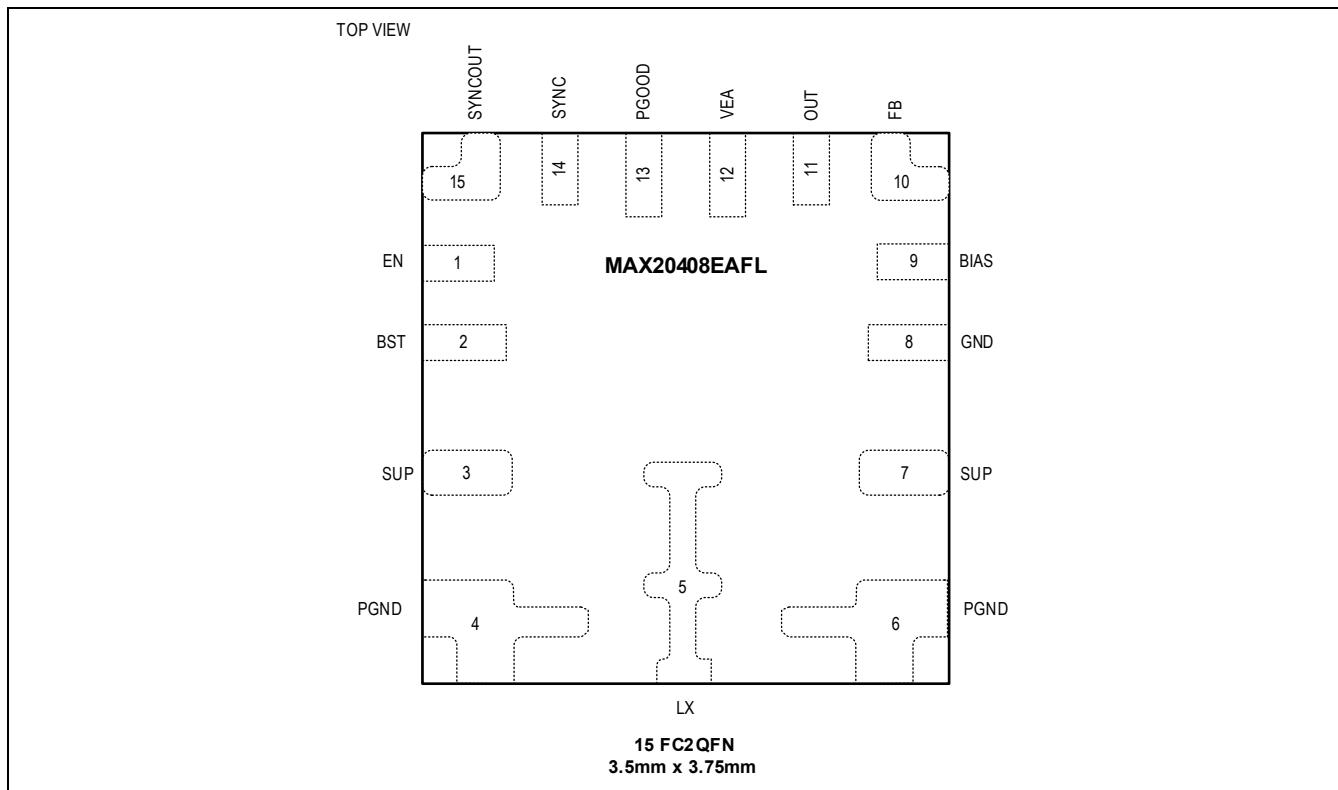

Pin Descriptions

| PIN | | NAME | FUNCTION |
|-----------|-----------|------|--|
| 17 FC2QFN | 15 FC2QFN | | |
| 1 | 1 | EN | High-Voltage-Compatible Enable Input. Drive EN high to enable the buck converter. |
| 2 | 2 | BST | High-Side Gate Driver Supply. Connect a 0.1µF ceramic capacitor between BST and LX. |
| 3 | 3 | SUP | IC Supply Input and Internal High-Side Switch Supply Input. Bypass SUP to PGND with 0.1µF and 4.7µF ceramic capacitors as close as possible. Both SUP pins are internally connected. |
| 4, 5 | 4 | PGND | Power Ground. Connect all PGND pins together. |
| 6 | 5 | LX | Buck Inductor Connection. Connect an inductor from LX to the buck output. LX is high impedance when the IC is disabled. |
| 7, 8 | 6 | PGND | Power Ground. Connect all PGND pins together. |
| 9 | 7 | SUP | IC Supply Input and Internal High-Side Switch Supply Input. Bypass SUP to PGND with 0.1µF and 4.7µF ceramic capacitors as close as possible. Both SUP pins are internally connected. |
| 10 | 8 | GND | Analog Ground. Connect GND and PGND through start connection to the PCB ground plane. |
| 11 | 9 | BIAS | 1.8V Internal Linear Regulator Output. Connect BIAS to ground with a minimum of 2.2µF ceramic capacitor. |
| 12 | 10 | FB | Feedback Input. Connect FB to a resistor-divider between OUT and GND to adjust the output voltage between 0.8V and 10V. Connect FB to BIAS for fixed output voltage. |
| 13 | 11 | OUT | Output Voltage Sense Input. The buck converter uses OUT to sense output voltage when FB is connected to BIAS. |

| | | | |
|----|----|---------|--|
| 14 | 12 | VEA | Internal Voltage Loop Error Amplifier Output. Connect VEA of the controller and target together in dual-phase operation. Leave VEA open for single-phase operation. |
| 15 | 13 | PGOOD | Open-Drain Power-Good Output. The PGOOD is low if the buck output voltage falls below 93% (typ) of regulation voltage. The PGOOD becomes high impedance when the buck output voltage rises above 94% (typ) of its regulation voltage. The PGOOD asserts low during soft-start. Connect PGOOD to BIAS or a positive voltage lower than 5.5V with a pull-up resistor to indicate buck output status. |
| 16 | 14 | SYNC | External Clock Synchronization Input. Connect SYNC low to enable skip-mode operation. Connect SYNC high for FPWM operation. Connect a valid external clock signal to SYNC to enable external clock synchronization. |
| 17 | 15 | SYNCOUT | 180° Out-of-Phase Clock Output. In dual-phase operation, connect SYNCOUT to BIAS to configure the IC as a target, and connect SYNCOUT of the controller to SYNC of the target. Leave SYNCOUT open in single-phase operation. |

Detailed Description

The MAX20408/MAX20410/MAX20408E/MAX20410E are small, synchronous buck converters with integrated high-side and low-side switches. The ICs are designed to deliver up to 8A/10A current with input voltages from 3V to 36V while using only 10 μ A quiescent current at no load condition. Voltage quality can be monitored by the PGOOD signal. The ICs can operate in dropout by running at 99% duty cycle, making them ideal for automotive and industrial applications.

The MAX20408/MAX20410/MAX20408E/MAX20410E offer fixed output voltages or adjustable output voltage programmed by an external resistor divider. Frequency is internally fixed with 2.1MHz and 400kHz options, which allow for small external components, reduced output ripple, and guarantee no AM interference. The signal at SYNC programs the ICs in skip enable, FPWM, or when synchronizing to the external clock. The spread-spectrum option minimizes EMI-radiated emissions. Average current-mode control with 34ns minimum ON time allows for large input/output step-down ratios without skipping cycles.

The MAX20408/MAX20410/MAX20408E/MAX20410E can also be configured in dual phase to supply up to 20A load. The average current-mode control provides noise immunity and accurate dynamic current sharing during transients.

The MAX20408E/MAX20410E feature reduced output capacitor requirement, windowed PGOOD, and improved EN threshold accuracy. The MAX20408E/MAX20410E offer fixed output options of 3.3V, 4V or 5V, or adjustable voltage options from 0.8V to 10V.

The FC2QFN package lowers the package parasitic impedance and improves thermal performance. Symmetrical pinout placement of SUP and PGND provides balanced current loop around the ICs and further improves their EMI performance.

Linear Regulator Output (BIAS)

The devices include a 1.8V linear regulator (VBIAS) that provide power to the internal circuit blocks. Connect a 2.2 μ F ceramic capacitor from BIAS to GND. During startup, the bias regulator draws power from the input and switches over to the output after the startup is completed (if V_{OUT} > 2.5V).

Synchronization Input (SYNC)

The MAX20408/MAX20410/MAX20408E/MAX20410E provide an internal oscillator with 400kHz and 2.1MHz options. The ICs can be synchronized to the external clock with a valid external clock present at SYNC. Drive SYNC high for FPWM operation with 400kHz or 2.1MHz switching frequency. Drive SYNC low to enable skip mode for better efficiency improvement at light load.

Enable Input (EN)

An enable input (EN) enables the ICs from shutdown mode. The EN is high-voltage compatible with input from automotive battery level down to 3V. Drive EN high to enable the ICs. Drive EN low to disable the ICs into shutdown mode. The quiescent current is reduced to 4 μ A (typ) during shutdown.

Soft-Start

Drive EN high to enable the ICs. The soft-start circuitry gradually ramps up the reference voltage during soft-start time (2.5ms, typ) to reduce the input inrush currents during startup.

Short-Circuit Protection

The ICs feature a cycle-by-cycle current limit and hiccup-mode to protect against a short-circuit or overload condition. In overload conditions, the high-side FET remains on until the inductor current reaches the current limit threshold, I_{LIM} . Then the converter turns off the high-side FET and turns on the low-side FET to allow the inductor current to ramp down. Once the inductor current decreases to the valley current limit, the converter turns on the high-side FET again. This cycle repeats until the overload condition is removed.

A short-circuit is detected when the output voltage falls below the preset threshold voltage while the inductor current hits the current limit. The threshold voltage is 50% of the output regulation voltage for fixed output voltage, or 25% of output regulation voltage for adjustable output voltage. During hiccup-mode, the ICs turn off the buck converter for 25ms (10x soft-start time), and then restart it if the overcurrent or short-circuit condition is removed. The hiccup repeats when the short-circuit is continuously present.

Power-Good Indicator (PGOOD)

The ICs feature an open-drain, windowed power-good (PGOOD) output to indicate the output voltage status. The PGOOD goes low to high impedance when the converter output voltage rises above 94% (typ) or falls below 104% (typ) of its nominal regulation voltage (MAX20408E/MAX20410E). The PGOOD goes low when the output voltage drops below 93% (typ) or rises above 105% (typ) of the nominal regulation voltage (MAX20408E/MAX20410E). Connect PGOOD to the converter output or BIAS voltage through a pull-up resistor. The PGOOD asserts low during soft-start.

Spread-Spectrum Option

The ICs feature enhanced EMI performance with the spread-spectrum option. Spread spectrum is available as a factory option. When spread-spectrum is enabled, the operating frequency is varied $\pm 3\%$ centered at switching frequency. The modulation signal is a triangular wave with 4.5kHz frequency at 2.1MHz. Therefore, switching frequency ramps down 3% and back to 2.1MHz in 110 μ s, and also ramps up 3% and back to 2.1MHz in 110 μ s, after which the cycle repeats. For operations at 400kHz, the modulation signal scales proportionally to 0.4/2.1.

The internal spread spectrum is disabled if the devices are synchronized to an external clock. However, the devices do not filter the input clock on SYNC and pass any modulation (including spread spectrum) present on the driving external clock.

Thermal Shutdown Protection

Thermal shutdown protection limits total power dissipation in the ICs. When the junction temperature exceeds +170°C, an internal sensor shuts down the ICs, allowing them to cool. The thermal sensor turns on the ICs again after the junction temperature cools by 20°C.

Dual-Phase Operation

Two MAX20408/MAX20410/MAX20408E/MAX20410E devices can be configured in dual phase to provide higher output current up to 20A. To operate in dual phase, one IC is programmed as a target by connecting its SYNCOUT to BIAS, and the other IC is treated as a controller. The SYNCOUT of the controller is connected to the SYNC of the target to have both ICs switch in 180° out of phase. Therefore, with present SYNCOUT signal from the controller, FPWM is recommended for dual-phase operation.

The VEA nodes of the controller and target are connected together to ensure balanced current sharing between two phases. Also, by doing this, the controller's voltage control loop is shared with the target. Therefore, both FB nodes can be connected to the respective BIAS for fixed output voltage options. For adjustable output voltage option, instead of connecting FB nodes together, separate resistor-dividers are used for each phase.

Low- I_Q Operation in Dual-Phase Operation

The MAX20408/MAX20410/MAX20408E/MAX20410E come with dual-phase capability, where each IC can be either configured as controller or target. The SYNCOUT pin of the controller outputs 180° out-of-phase clock when SYNC is tied high (FPWM mode). For low- I_Q mode, pull the SYNC pin of the controller low (skip mode). In this mode, there is no clock present on the SYNCOUT pin of the controller and the controller IC enters skip mode. The internal circuit of the target IC remains ON during this time and actively looks for the SYNCOUT signal from the controller. As the target IC is ON, the quiescent current is slightly higher. The dual-phase operation is not recommended in this configuration.

The light load efficiency can be further improved by connecting the target EN to the SYNC of controller IC and dynamically varying it during operation. At no load, the controller SYNC can be pulled low resulting in target IC being disabled and low

I_Q . When the load increases, the controller SYNC can be pulled high to enable dual-phase operation in FPWM mode. [Table 1](#) summarizes the truth table for low- I_Q operation.

Table 1. Configurations for Low- I_Q Operation

| CONTROLLER | TARGET | MODE |
|------------------------|-----------|---------------------------------|
| EN = High, SYNC = BIAS | EN = High | FPWM (high I_Q) |
| EN = High, SYNC = Low | EN = High | Not recommended |
| EN = High, SYNC = Low | EN = Low | Standby mode (ultra-low I_Q) |
| EN = Low | EN = High | Not allowed |

Applications Information

Setting the Output Voltage

Connect FB to BIAS to select the fixed output voltage set by the internal resistor-divider between OUT and GND. Contact the factory for fixed output voltage options. To externally program the output voltage between 0.8V and 10V for a 400kHz switching frequency, between 0.8V and 6V for a 2.1MHz switching frequency (MAX20408/MAX20410) and between 0.8V and 10V for a 2.1MHz switching frequency (MAX20408E/MAX20410E), connect a resistor-divider from the buck converter output to FB and then to GND. Select R_{FB2} between FB and GND in typical application circuits less than 20kΩ. Calculate R_{FB1} between buck output and FB with the following equation:

$$R_{FB1} = R_{FB2} \times \left(\frac{V_{OUT}}{V_{FB}} - 1 \right)$$

where, $V_{FB} = 0.8V$, and R_{FB2} is less than 20kΩ.

The MAX20408/MAX20410 can operate in both fixed and adjustable output voltage configuration based on the FB pin connection as described above. The MAX20408E/MAX20410E offer separate fixed output options of 3.3V, 4V or 5V, or adjustable voltage options from 0.8V to 10V. See the [Ordering Information](#) table for more details.

[Table 2](#) provides component selection recommendations for each output range (CFF is recommended based on $R_{FB2} = 10k\Omega$) for adjustable output voltage operation.

Table 2. Recommended Component Selection with Resistor-Divider Output Voltage Setting

| PART NUMBER | SWITCHING FREQUENCY (kHz) | V_{OUT} (V) | INDUCTOR (mH) | MINIMUM EFFECTIVE OUTPUT CAPACITANCE (mF) | CFF (pF) |
|-------------------------|---------------------------|---------------|---------------|---|----------|
| MAX20408/ MAX20410 | 400 | 0.8 to 1.8 | 0.68 | 752 | N/A |
| | 400 | 1.8 to 3.3 | 1 | 611 | N/A |
| | 400 | 3.3 to 5 | 2.2 | 420 | 220 |
| | 400 | 5 to 7 | 2.2 | 287 | 180 |
| | 400 | 7 to 10 | 2.2 | 134 | 47 |
| | 2100 | 0.8 to 1.8 | 0.22 | 376 | N/A |
| | 2100 | 1.8 to 3.3 | 0.22 | 423 | N/A |
| | 2100 | 3.3 to 5 | 0.47 | 88 | 39 |
| | 2100 | 5 to 6 | 0.47 | 83 | 15 |
| MAX20408E/ MAX20410E | 400 | 0.8 to 1.8 | 0.68 | 376 | N/A |
| | 400 | 1.8 to 3 | 1 | 225 | 15 |
| | 400 | 3 to 5 | 2.2 | 76 | 82 |
| | 400 | 5 to 10 | 2.2 | 76 | 47 |

| | | | | | |
|--|------|------------|------|----|-----|
| | 2100 | 0.8 to 1.8 | 0.22 | 74 | N/A |
| | 2100 | 1.8 to 3.3 | 0.22 | 38 | N/A |
| | 2100 | 3.3 to 7 | 0.47 | 38 | 68 |
| | 2100 | 7 to 10 | 0.82 | 38 | 68 |

Setting the Output Voltage in Dual-Phase Operation

To set the output voltage to the internal fixed voltage, order the same fixed V_{OUT} setting for both controller and target ICs, and connect the FB pin to its respective BIAS. DO NOT connect the FB pins of the controller and target together.

To set the output voltage to a value other than the available fixed V_{OUT} options, connect a resistor-divider between OUT, FB, and GND as shown in [Figure 1](#). Use an identical but separate resistor-divider for controller and target.

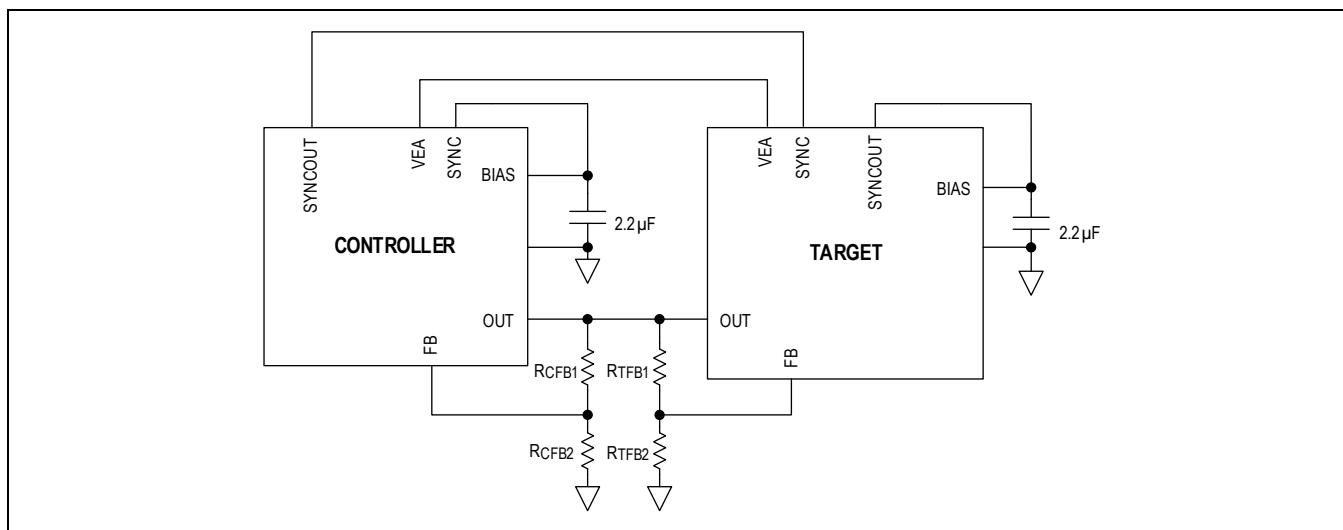


Figure 1. Typical Application Circuit for Dual-Phase Configuration with External Resistor-Divider

Input Capacitor

The input capacitors reduce peak current drawn from the power source, and improve noise and voltage ripple on the SUP nodes caused by the buck converter switching cycles. Use two ceramic input capacitors with 0.1µF and 4.7µF capacitance in parallel at each side of the IC for proper buck operation.

Place a 0.1µF ceramic capacitor with 0402 or 0603 size next to SUP and PGND at each side of the IC to reduce input noise and improve EMI performance. A 4.7µF ceramic capacitor after 0.1µF capacitor is required on each input side to reduce input voltage ripple. Additional buck capacitor might be required if high impedance exists in the input supply or traces.

The input capacitor RMS current requirement (I_{RMS}) is defined by the following equation:

$$I_{RMS} = I_{LOAD(MAX)} \times \left(\frac{\sqrt{V_{OUT} \times (V_{SUP} - V_{OUT})}}{V_{SUP}} \right)$$

I_{RMS} has a maximum value when the input voltage equals twice the output voltage:

$$V_{SUP} = 2 \times V_{OUT}$$

Therefore:

$$I_{RMS} = \frac{I_{LOAD(MAX)}}{2}$$

Choose an input capacitor that exhibits less than +10°C self-heating temperature rise at the RMS input current for optimal long-term reliability. The input-voltage ripple comprises ΔV_Q (caused by the capacitor discharge) and ΔV_{ESR} (caused by

the ESR of the capacitor). Assume the contribution from the ESR and capacitor discharge equal to 50%. Calculate the input capacitance and ESR required for a specified input voltage ripple using the following equations:

$$ESR_{IN} = \frac{\Delta V_{ESR}}{I_{LOAD(MAX)} + \frac{\Delta I_L}{2}}$$

$$C_{IN} = \frac{I_{LOAD(MAX)} \times D(1 - D)}{\Delta V_Q \times f_{SW}}$$

where:

$$\Delta I_L = \frac{(V_{SUP} - V_{OUT}) \times V_{OUT}}{V_{SUP} \times f_{SW} \times L}$$

$$D = \frac{V_{OUT}}{V_{SUP}}$$

and $I_{LOAD(MAX)}$ is the maximum output current, ΔI_L is the peak-to-peak inductor current, f_{SW} is the switching frequency, and D is the duty cycle.

Selecting the Inductor

Inductor selection is a compromise between component size, efficiency, control loop bandwidth, and loop stability. Insufficient inductance increases the inductor current ripple, conduction losses, and output voltage ripple, and causes loop instability in the worst case. A large inductor reduces the inductor current ripple by sacrificing component size and slow response. See [Table 3](#) for optimized inductor values at 400kHz and 2.1MHz switching frequency. The nominal standard value selected should be within $\pm 50\%$ of the specified inductance.

Table 3. Recommended Inductor and Output Capacitor for Fixed Output Voltage Setting

| PART NUMBER | SWITCHING FREQUENCY | RECOMMENDED INDUCTANCE (pH) | MINIMUM EFFECTIVE OUTPUT CAPACITANCE (pF) |
|-------------------------|---------------------|-----------------------------|---|
| MAX20408/ MAX20410 | 400kHz | 2.2 | 150 |
| | 2.1MHz | 0.47 | 70 |
| MAX20408E/ MAX20410E | 400kHz | 2.2 | 76 |
| | 2.1 MHz | 0.47 | 38 |

Output Capacitor

The output capacitor is a critical component for switching regulators. It is selected to meet output voltage ripple, load transient response, and loop stability requirements.

The output voltage ripple comprises ΔV_Q (caused by the capacitor discharge) and ΔV_{ESR} (caused by the ESR of the output capacitor). Use low-ESR ceramic capacitors. Assume the contribution to the output ripple voltage from ESR and the capacitor discharge to be equal. Use the following equations to get the output capacitance and ESR for a specified output voltage ripple.

$$ESR = \frac{\Delta V_{ESR}}{\Delta I_{P-P}}$$

$$C_{OUT} = \frac{\Delta I_{P-P}}{8 \times V_Q \times f_{SW}}$$

$$\Delta I_{P-P} = \frac{(V_{SUP} - V_{OUT}) \times V_{OUT}}{V_{SUP} \times f_{SW} \times L}$$

$$V_{OUT_RIPPLE} = \Delta V_{ESR} + \Delta V_Q$$

where ΔI_{P-P} is the peak-to-peak inductor current, and f_{SW} is the switching frequency.

During a load step, the output capacitors supply the load current before the converter loop responds with higher duty cycle, which causes output voltage undershoot. To keep the maximum output voltage deviations below the tolerable limits of the electronics being powered, calculate the output capacitance with the following equation:

$$C_{OUT} = \frac{\Delta I_{LOAD}}{\Delta V \times 2\pi \times f_C}$$

where ΔI is the load step, ΔV is the allowed output voltage undershoot, and f_C is the loop crossover frequency, which can be assumed to be the lesser of $f_{SW}/10$ or 100kHz. The calculated C_{OUT} is the actual capacitance after considering capacitance tolerance, temperature effect, and voltage derating. See [Table 3](#) for recommended output capacitance.

PCB Layout Guidelines

Careful PCB layout is critical to achieve low switching losses, low EMI, and clean, stable operation. See [Figure 2](#) for an example layout.

1. Place the input bypass capacitors C_{BP} and C_{IN} as close as possible to each SUP and PGND on both sides of the IC. C_{BP} should be placed right next to the SUP and PGND node on the same layer to provide best EMI rejection and minimize the input noise on SUP. The symmetrical C_{IN} and C_{BP} arrangements generate the SUP loops with opposite orientation to cancel the magnetic fields and help EMI mitigation.
2. Minimize the connection from the buck output capacitor's ground terminal to the input capacitor's ground terminal. Keep buck high-current path, and power traces wide and short. Minimize the traces from LX node to the inductor and then to the output capacitors. This minimizes the buck current loop area, and minimizes LX trace resistance and stray capacitance to achieve optimal efficiency.
3. Place the bootstrap capacitor $CBST$ close to the IC. Use short and wide traces from BST and LX , and minimize this routing parasitic impedance. High parasitic impedance from BST to LX impacts the switching speed, further increases switching losses, and high dV/dt noise. See [Figure 1](#) for BST to LX routing.
4. Place the $BIAS$ capacitor as close to the $BIAS$ node as possible. Noise coupling into $BIAS$ can disturb the reference and bias circuitry if this capacitor is installed away from the IC.
5. Keep the sensitive analog signals (FB/VEA) away from noisy switching nodes (LX and BST) and high current loops.
6. Ground is the return path for the full-load currents flowing into and out of the IC. It is also the common reference voltage for all the analog circuits. Improper ground routing can bring extra resistance and inductance into the current loop, causing different voltage reference and worsening voltage ringing or spikes. Place a solid ground plane layer under the power loop components layer to shield the switching noise from other sensitive traces. Connect the analog ground GND and power grounds PGND together at a single point in a star ground connection.
7. The PCB layout also plays an important role in power dissipation and thermal performance. The PGND nodes are the main power connection area between the IC and outside the IC. Place the ground copper area as much as possible around the PGND area to ensure efficient heat transfer. Place as many vias as possible around the PGND nodes to further transfer the heat down the internal ground plane and other layers to further improve the thermal resistance from the IC package to the ambient.


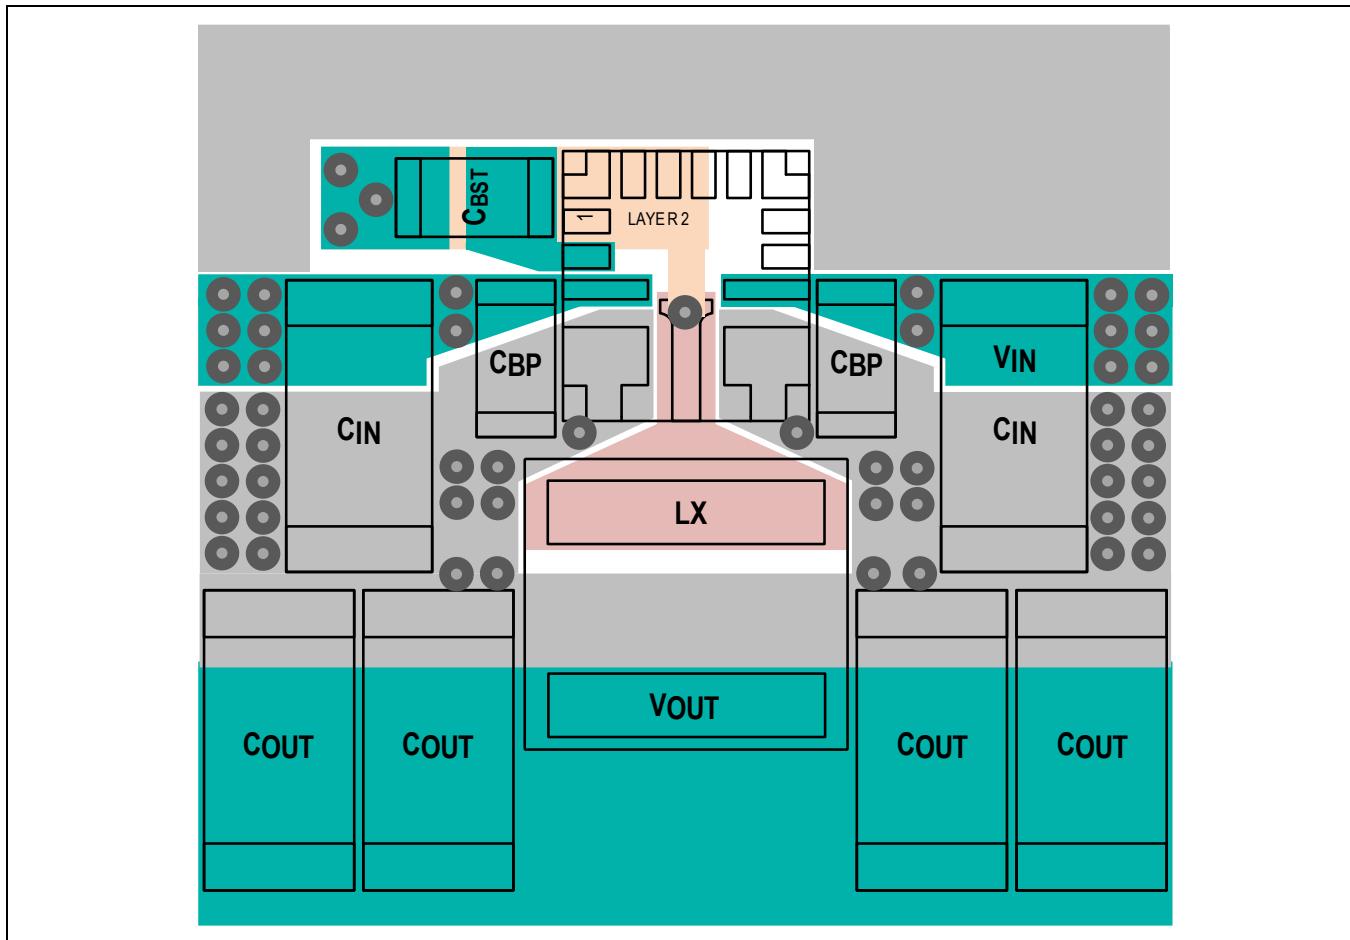



Figure 2. PCB Layout Example

Typical Application Circuits


MAX20408 Configuration: 2.1MHz, 8A, Fixed Output Voltage

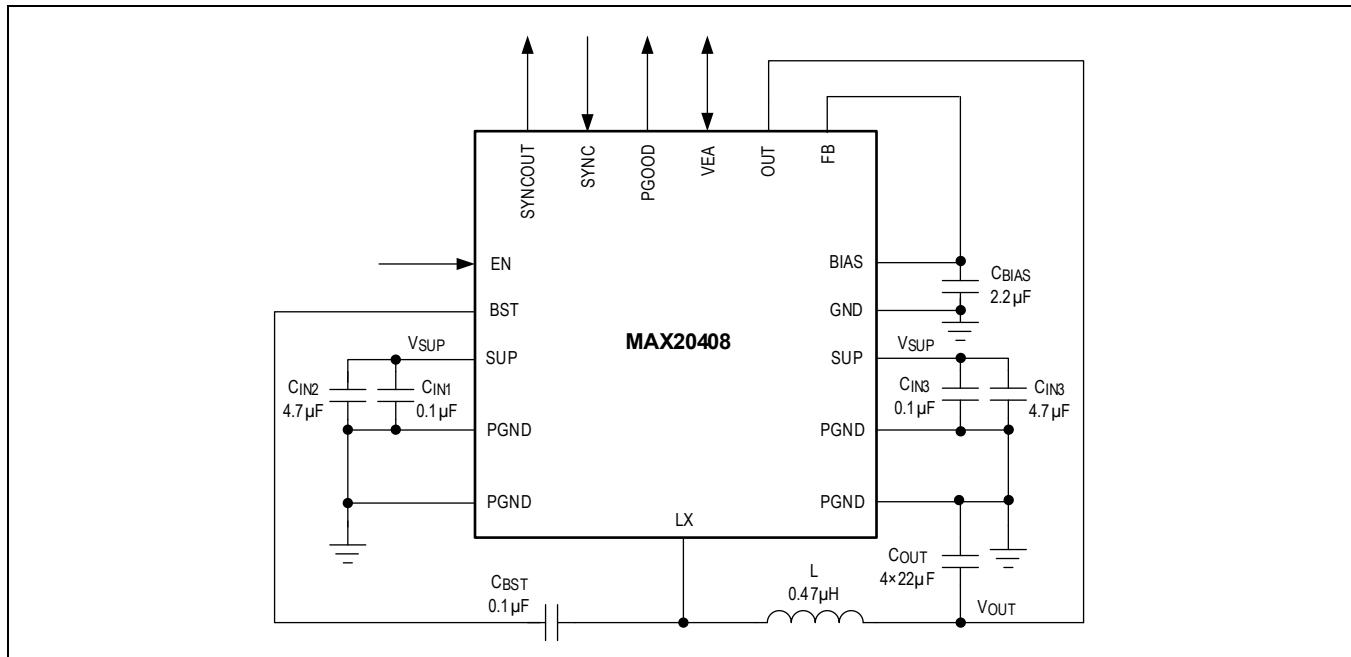


MAX20410 Configuration: 400kHz, 10A, Adjustable Output Voltage

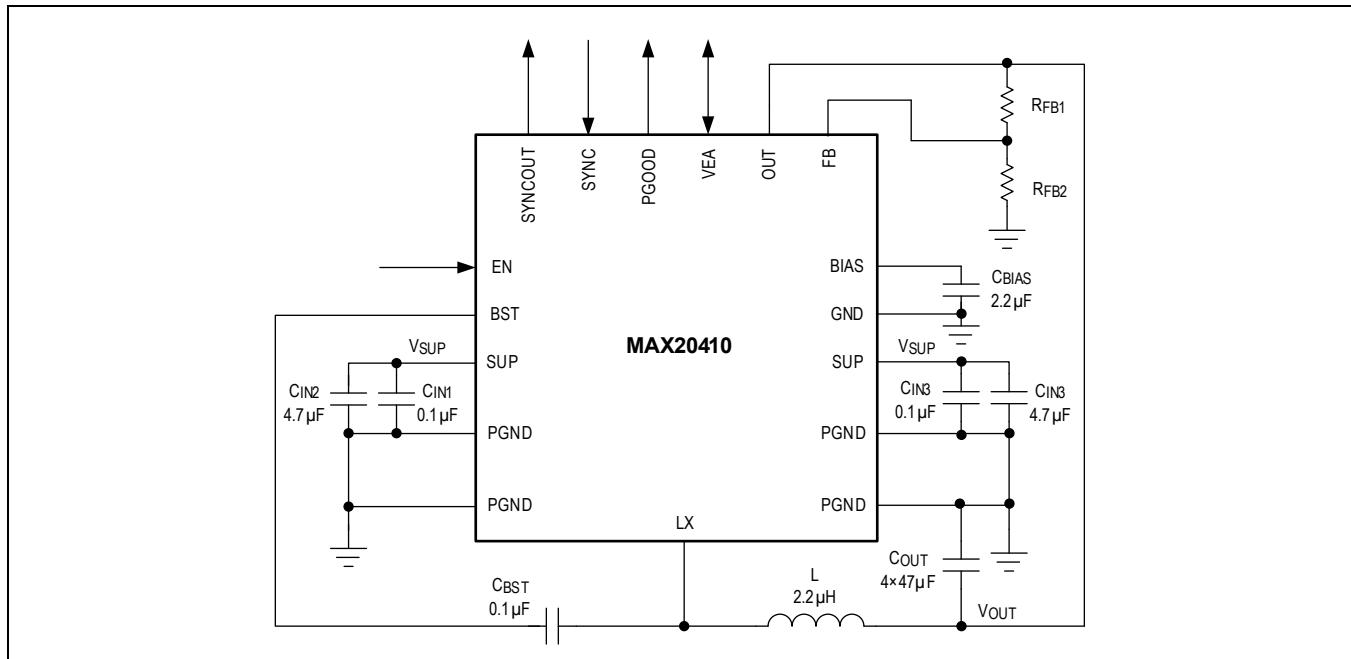

MAX20408 Dual-Phase Configuration: 2.1MHz, 16A, Fixed Output Voltage

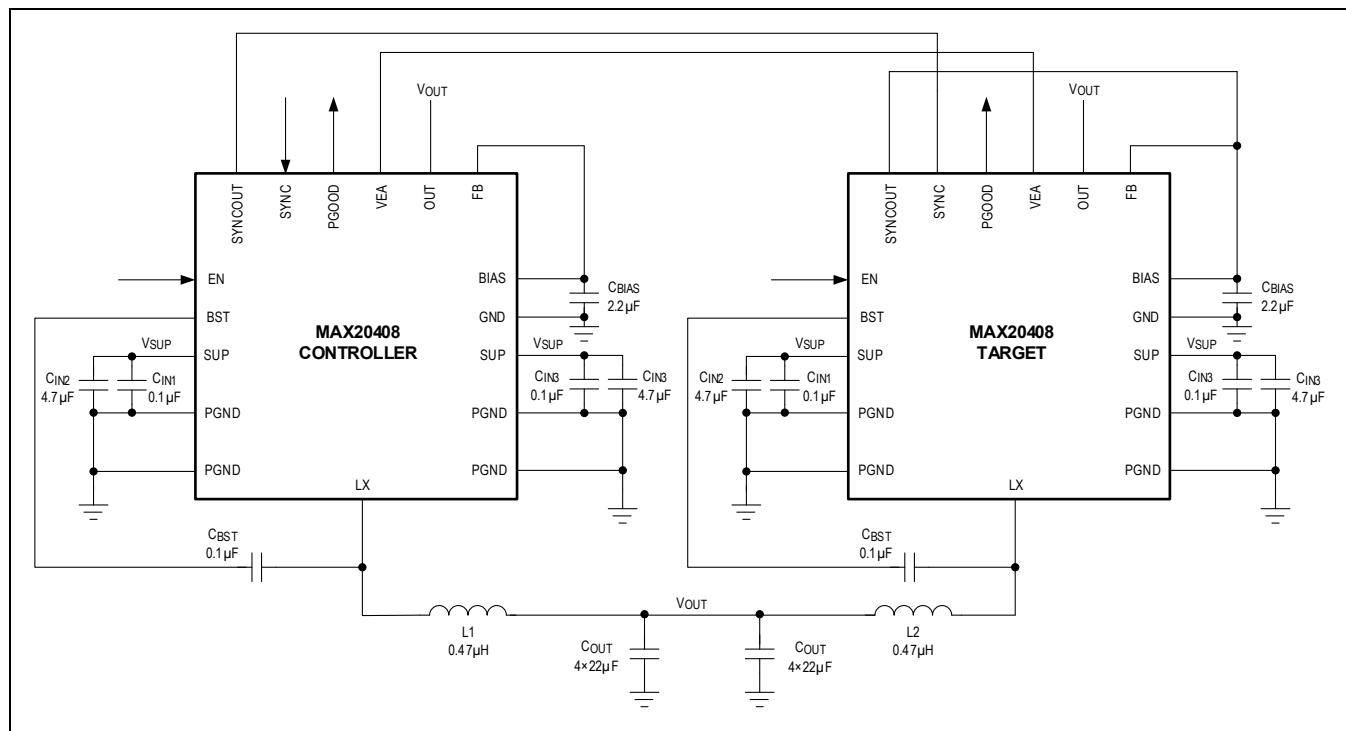

MAX20410 Dual-Phase Configuration: 400kHz, 20A, Adjustable Output Voltage

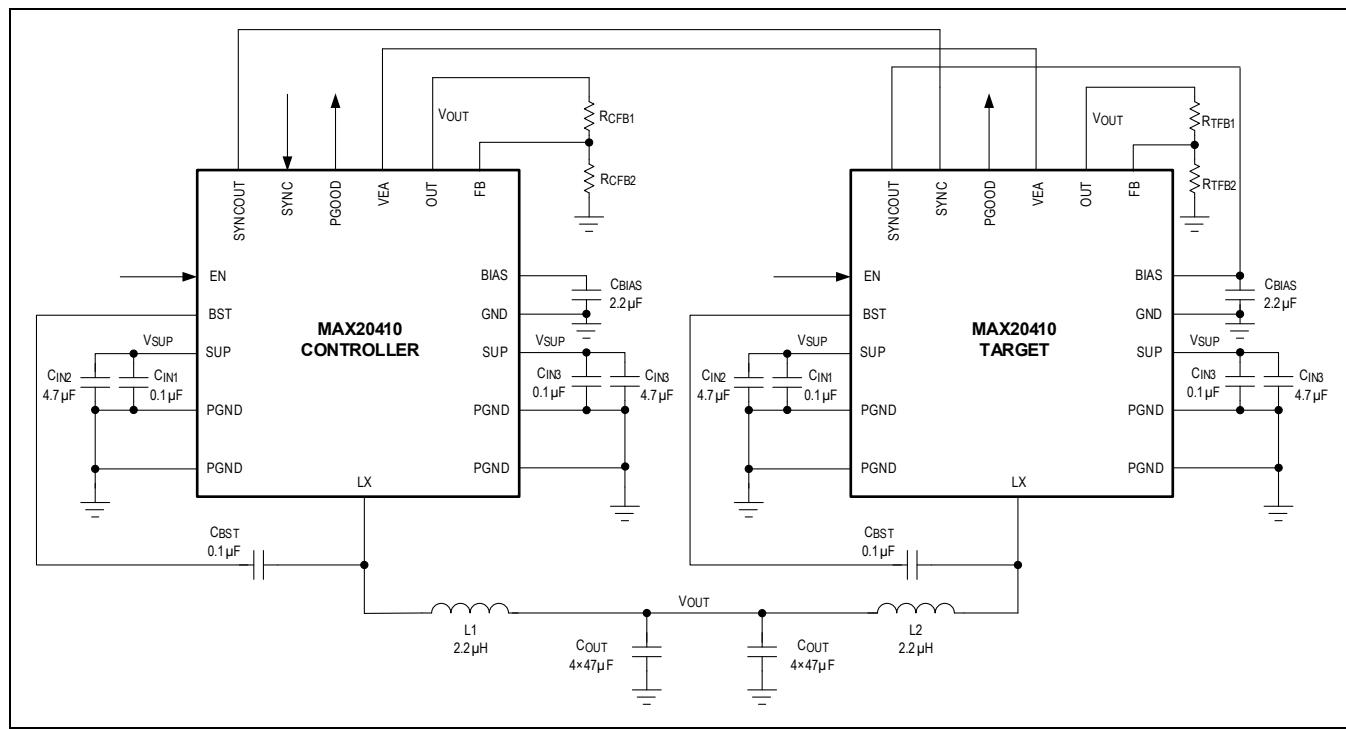

Ordering Information

| PART NUMBER | V _{OUT} | MAXIMUM OPERATING CURRENT (A) | FREQUENCY (kHz) | SPREAD-SPECTRUM | PACKAGE |
|---------------------|------------------------------------|-------------------------------|-----------------|-----------------|-------------|
| MAX20408AFOA/VY+ | 5V (fixed), 0.8V to 6V (adj) | 8 | 2100 | OFF | F173A3FY +4 |
| MAX20408AFOB/VY+ | 3.3V (fixed), 0.8V to 6V (adj) | 8 | 2100 | OFF | F173A3FY +4 |
| MAX20408AFOC/VY+ | 5V (fixed), 0.8V to 6V (adj) | 8 | 2100 | ON | F173A3FY +4 |
| MAX20408AFOD/VY+ | 3.3V (fixed), 0.8V to 6V (adj) | 8 | 2100 | ON | F173A3FY +4 |
| MAX20408AFOE/VY+ | 4V (fixed), 0.8V to 6V (adj) | 8 | 2100 | ON | F173A3FY +4 |
| MAX20408AFOF/VY+ | 5V (fixed), 0.8V to 10V (adj) | 8 | 400 | ON | F173A3FY +4 |
| MAX20408AFOG/VY+ | 3.3V (fixed), 0.8V to 10V (adj) | 8 | 400 | ON | F173A3FY +4 |
| MAX20408AFOH/VY+ | 3.9V (fixed), 0.8V to 6V (adj) | 8 | 2100 | ON | F173A3FY +4 |
| MAX20408AFOI/VY+** | 3.3V (fixed), 0.8V to 6V (adj) | 8 | 2100 | ON | F173A3FY +4 |
| MAX20410AFOA/VY+ | 5V (fixed), 0.8V to 10V (adj) | 10 | 400 | OFF | F173A3FY +4 |
| MAX20410AFOB/VY+ | 3.3V (fixed), 0.8V to 10V (adj) | 10 | 400 | OFF | F173A3FY +4 |
| MAX20410AFOC/VY+ | 5V (fixed), 0.8V to 10V (adj) | 10 | 400 | ON | F173A3FY +4 |
| MAX20410AFOD/VY+ | 3.3V (fixed), 0.8V to 10V (adj) | 10 | 400 | ON | F173A3FY +4 |
| MAX20410AFOE/VY+ | 5V (fixed), 0.8V to 6V (adj) | 10 | 2100 | ON | F173A3FY +4 |
| MAX20410AFOF/VY+ | 3.3V (fixed), 0.8V to 6V (adj) | 10 | 2100 | ON | F173A3FY +4 |
| MAX20408EAFOA/VY+** | 5V (fixed) | 8 | 2100 | OFF | F173A3FY +4 |
| MAX20408EAFOB/VY+** | 3.3V (fixed) | 8 | 2100 | OFF | F173A3FY +4 |
| MAX20408EAFOC/VY+** | 5V (fixed) | 8 | 2100 | ON | F173A3FY +4 |
| MAX20408EAFOD/VY+ | 3.3V (fixed) | 8 | 2100 | ON | F173A3FY +4 |
| MAX20408EAFOE/VY+ | 4V (fixed) | 8 | 2100 | ON | F173A3FY +4 |
| MAX20408EAFOF/VY+** | 5V (fixed) | 8 | 400 | ON | F173A3FY +4 |
| MAX20408EAFOG/VY+** | 3.3V (fixed) | 8 | 400 | ON | F173A3FY +4 |
| MAX20408EAFOZ/VY+** | 1.8V to 10V (adj) | 8 | 2100 | OFF | F173A3FY +4 |
| MAX20408EAFOY/VY+** | 1.8V to 10V (adj) | 8 | 2100 | ON | F173A3FY +4 |
| MAX20410EAFOA/VY+** | 5V (fixed) | 10 | 400 | OFF | F173A3FY +4 |
| MAX20410EAFOB/VY+** | 3.3V (fixed) | 10 | 400 | OFF | F173A3FY +4 |

| | | | | | |
|---------------------|-------------------|----|------|-----|-------------|
| MAX20410EAFOC/VY+ | 5V (fixed) | 10 | 400 | ON | F173A3FY +4 |
| MAX20410EAFOD/VY+ | 3.3V (fixed) | 10 | 400 | ON | F173A3FY +4 |
| MAX20410EAFOE/VY+** | 5V (fixed) | 10 | 2100 | ON | F173A3FY +4 |
| MAX20410EAFOF/VY+ | 3.3V (fixed) | 10 | 2100 | ON | F173A3FY +4 |
| MAX20410EAFOZ/VY+** | 1.8V to 10V (adj) | 10 | 400 | OFF | F173A3FY +4 |
| MAX20410EAFOY/VY+** | 1.8V to 10V (adj) | 10 | 400 | ON | F173A3FY +4 |
| MAX20410EAFOX/VY+ | 1.8V to 10V (adj) | 10 | 2200 | ON | F173A3FY +4 |
| MAX20408EAFLB/VY+ | 1.8V to 10V (adj) | 8 | 2100 | ON | F153A3FY +3 |

For variants with different options, contact the factory.

** Potential future product.

/VY+ denotes a side-wettable, automotive-qualified package.

/V denotes an AEC-Q100, automotive-qualified part.

+ denotes a lead(Pb)-free/RoHS-compliant package.

T denotes tape-and-reel.

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|--|--|
| 0 | 4/21 | Release for Market Intro | — |
| 1 | 6/21 | Updated the Absolute Maximum Ratings table and added Table 1 for Component Selection | 5, 16 |
| 2 | 8/21 | Updated Ordering Information table | 24 |
| 3 | 9/21 | Updated Ordering Information table | 24 |
| 4 | 1/22 | Added Dual-Phase Operation, Low-I _Q Operation in Dual-Phase Sections, and Table 1. Configurations for Low-I _Q Operation, Updated Ordering Information table | 16, 26 |
| 5 | 3/22 | Updated Ordering Information table | 26 |
| 6 | 11/22 | Updated Ordering Information table | 26 |
| 7 | 1/23 | Updated Ordering Information table | 26 |
| 8 | 8/23 | Updated Absolute Maximum Ratings, Package Information, Electrical Characteristics table, Detailed Description, Applications Information, Typical Applications Circuits, and Ordering Information table | 6, 8, 16-19, 24-26 |
| 9 | 11/23 | Updated Electrical Characteristics and Ordering Information table | 7, 26 |
| 10 | 3/24 | Added E variant throughout; updated Ordering Information table | 1, 2, 7, 8, 14, 16, 17, 19, 20, 21, 28 |
| 11 | 7/24 | Updated General Description, Electrical Characteristics, Synchronization Input (SYNC), Setting the Output Voltage, and Ordering Information | 1, 8, 9, 18, 21, 30 |
| 12 | 10/24 | Updated Ordering Information table | 30 |
| 13 | 1/26 | Updated Ordering Information table | 24 |

MAX20408/MAX20410/
MAX20408E/MAX20410E

Automotive 36V, 8A/10A Fully Integrated Buck
Converters with 10µA Quiescent Current and
Dual-Phase Capability

NOTES