

Four- to Seven-Input Automotive Power-System Monitor Family

MAX20480

General Description

The MAX20480 is a complete ASIL-compliant SoC power-system monitor with up to seven voltage monitor inputs. Each input has programmable OV/UV thresholds of between 2.5% and 10% with $\pm 1\%$ accuracy. Two of the inputs have a separate remote ground-sense input and support DVS through the integrated I²C interface.

The MAX20480 contains a programmable flexible power sequence recorder (FPSR). This recorder stores power-up and power-down timestamps separately, and supports on/ off and sleep/standby power sequences. The MAX20480 also contains a programmable challenge/response watchdog, which is accessible through the I²C interface, along with a configurable RESET output.

The MAX20480 improves reliability while significantly reducing system size and component count as compared to separate ICs or discrete components. The MAX20480 meets ASIL D reliability when used with a supervisory controller. The device is designed to operate over the ambient temperature range of -40°C to +125°C.

Applications

- ADAS
- Autonomous Driving Processing Systems
- Remote Sensor Modules
- Power System Supervision and MCU/SoC Monitoring


Benefits and Features

- Small Solution
 - 2.35V to 5.50V Operating Supply Voltage
 - · Only One External Component Required
 - 150µA Operating Current
 - 8µA Power-Down Mode
- High Precision
 - Selectable 102.5% to 110% OV Monitors
 - Selectable 97.5% to 90% UV Monitors
 - ±1% Accuracy over Entire Temperature Range
 - ±0.8% Accuracy from -10°C to +105°C
 - · 0.5% Step Size
 - · ASIL D Compliance
- · Highly Integrated
 - Five Fixed-Voltage Monitoring Inputs
 - Two Differential DVS Tracking-Voltage Monitoring Inputs with Remote-Ground Sense
 - Power-Sequencing Recording
 - Simple or Challenge/Response Windowed Watchdog
 - Fault Recording
 - CRC on I²C Interface
 - Programmable I²C Address
 - OTP Configuration with Error-Correcting Code and Reload Functionality
 - Programmable RESET Pin
- 16-Pin, Side-Wettable TQFN with Exposed Pad (3mm x 3mm)
- AEC-Q100 Qualified
- -40°C to +125°C Operating Temperature

Ordering Information appears at end of data sheet.

Visit Web Support to complete the nondisclosure agreement (NDA) required to receive additional product information.

Simplified Block Diagram

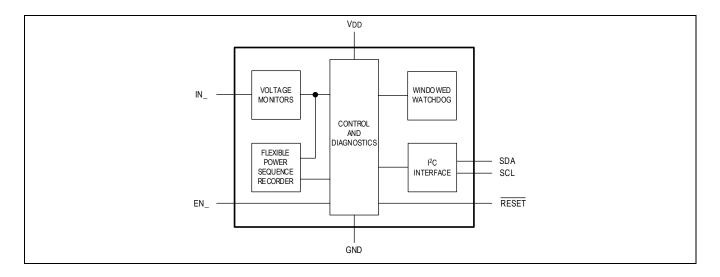

www.analog.com Analog Devices | 2

