

Fast Responding, 45 dB Range, 0.5 GHz to 43.5 GHz Envelope Detector

FEATURES

- ▶ Schottky diode detector with linearization
- ▶ Broadband $50\ \Omega$ input impedance
- ▶ Accurate response from 0.5 GHz to 43.5 GHz with minimal slope variation
- ▶ Input range of $-30\ \text{dBm}$ to $+15\ \text{dBm}$, referred to $50\ \Omega$
- ▶ Excellent temperature stability
- ▶ $2.1\ \text{V}/\text{V}_{\text{PEAK}}$ (output voltage per input peak voltage) slope at 10 GHz
- ▶ Fast envelope bandwidth: 40 MHz
- ▶ Fast output rise time: 4 ns
- ▶ Low power consumption: 1.6 mA at 5.0 V
- ▶ 2 mm × 2 mm, 6-lead LFCSP package

APPLICATIONS

- ▶ Microwave point to point links
- ▶ Microwave instrumentation
- ▶ Radar-based measurement systems

GENERAL DESCRIPTION

The ADL6010 is a versatile, broadband envelope detector covering the microwave spectrum. It provides state-of-the-art accuracy with very low power consumption (8 mW) in a simple, easy to use 6-lead format. The output is a baseband voltage proportional to the instantaneous amplitude of the radio frequency (RF) input signal. It exhibits minimal slope variation of the RF input to envelope output transfer function from 0.5 GHz to 43.5 GHz.

The detector cell uses a proprietary eight Schottky diode array followed by a novel linearizer circuit that creates a linear voltmeter with an overall scaling factor (or transfer gain) of nominally $\times 2.2$ relative to the voltage amplitude of the input.

Although the ADL6010 is not inherently a power responding device, it remains convenient to specify the input in this way. Thus, the permissible input power, relative to a $50\ \Omega$ source input impedance, ranges from $-30\ \text{dBm}$ to $+15\ \text{dBm}$. The corresponding input voltage amplitudes of $11.2\ \text{mV}$ to $1.8\ \text{V}$ generate quasi-dc outputs from about $25\ \text{mV}$ to $4\ \text{V}$ above common (COMM). A subtle aspect of the balanced detector topology is that no even-order distortion,

FUNCTIONAL BLOCK DIAGRAM

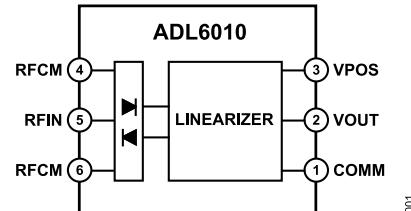


Figure 1.

caused by nonlinear source loading, occurs at the input. This is an important benefit in applications where a low ratio coupler is used to extract a signal sample and is a significant improvement over traditional diode detectors.

The power equivalent of a fluctuating RF input amplitude can be extracted by the addition of an rms-to-dc converter IC. Alternatively, the baseband output can be applied to a suitably fast analog-to-digital converter (ADC) and the rms value (and other signal metrics, such as peak to average ratio) calculated in the digital domain.

The output response accuracy is insensitive to variation in the supply voltage, which can range from $4.75\ \text{V}$ to $5.25\ \text{V}$. The ultralow power dissipation contributes to its long-term stability.

The ADL6010ACPZN is specified for operation from -40°C to $+85^{\circ}\text{C}$, and the ADL6010SCPZN is specified for operation from -55°C to $+125^{\circ}\text{C}$. Both are available in a [6-lead, 2 mm × 2 mm LFCSP package](#).

TABLE OF CONTENTS

Features.....	1	Basic Connections.....	16
Applications.....	1	PCB Layout Recommendations.....	16
Functional Block Diagram.....	1	System Calibration and Error Calculation.....	17
General Description.....	1	Effect of a Capacitive Load on Rise Time and Fall Time.....	18
Specifications.....	3	Evaluation Board.....	19
Absolute Maximum Ratings.....	7	Evaluation Board Assembly Drawings.....	20
ESD Caution.....	7	Outline Dimensions.....	21
Pin Configurations and Function Descriptions.....	8	Ordering Guide.....	22
Typical Performance Characteristics.....	9	Evaluation Boards.....	22
Measurement Setups.....	15		
Theory of Operation.....	16		

REVISION HISTORY**1/2026—Rev. E to Rev. F**

Changes to Table 1.....	3
-------------------------	---

SPECIFICATIONS

VPOS = 5.0 V, TA = 25°C, 50 Ω source input impedance, single-ended input drive, unless otherwise stated.

Table 1.

Parameter	Test Conditions/Comments	Min	Typ ¹	Max	Unit
RF INPUT INTERFACE	RFIN pin				
Operating Frequency	Single-ended input drive, see the Theory of Operation section	0.5	50	43.5	GHz
Nominal Input Impedance					Ω
FREQUENCY = 500 MHz	Input RFIN to output VOUT				
Detection Range	Continuous wave (CW) input	44			dB
±1 dB Error					
Maximum Input Level, ±1 dB	Three point calibration at -26 dBm, -14 dBm, and +5 dBm	16			dBm
Minimum Input Level, ±1 dB	Three point calibration at -26 dBm, -14 dBm, and +5 dBm	-28			dBm
Deviation vs. Temperature	Deviation from output at 25°C				
	-40°C < TA < +85°C, input power (PIN) = +10 dBm	+0.2/-0.1			dB
	-55°C < TA < +125°C, PIN = +10 dBm	+0.3/-0.2			dB
	-40°C < TA < +85°C, PIN = -10 dBm	+0.7/-0.6			dB
	-55°C < TA < +125°C, PIN = -10 dBm	+0.9/-1.2			dB
Slope	Calibration at -14 dBm and +5 dBm	2.2			V/V _{PEAK}
Intercept	Calibration at -14 dBm and +5 dBm	3			mV
Output Voltage					
	P _{IN} = +10 dBm	2.2			V
	P _{IN} = -10 dBm	0.19			V
FREQUENCY = 1 GHz	Input RFIN to output VOUT				
Detection Range	CW input	45			dB
±1 dB Error					
Maximum Input Level, ±1 dB	Three point calibration at -25 dBm, -10 dBm, and +8 dBm	15			dBm
Minimum Input Level, ±1 dB	Three point calibration at -25 dBm, -10 dBm, and +8 dBm	-30			dBm
Deviation vs. Temperature	Deviation from output at 25°C				
	-40°C < TA < +85°C, PIN = +10 dBm	+0.1/-0.1			dB
	-55°C < TA < +125°C, PIN = +10 dBm	+0.2/-0.2			dB
	-55°C < TA < +125°C, PIN = -10 dBm	+0.3/-0.3			dB
	-40°C < TA < +85°C, PIN = -10 dBm	+0.4/-0.6			dB
Slope	Calibration at -10 dBm and +8 dBm	2.2			V/V _{PEAK}
Intercept	Calibration at -10 dBm and +8 dBm	5			mV
Output Voltage					
	P _{IN} = +10 dBm	2.25			V
	P _{IN} = -10 dBm	0.22			V
FREQUENCY = 5 GHz	Input RFIN to output VOUT				
Detection Range	CW input	46			dB
±1 dB Error					
Maximum Input Level, ±1 dB	Three point calibration at -25 dBm, -10 dBm, and +8 dBm	16			dBm
Minimum Input Level, ±1 dB	Three point calibration at -25 dBm, -10 dBm, and +8 dBm	-30			dBm
Deviation vs. Temperature	Deviation from output at 25°C				
	-40°C < TA < +85°C, PIN = +10 dBm	+0.2/-0.1			dB
	-55°C < TA < +125°C, PIN = +10 dBm	+0.3/-0.2			dB
	-40°C < TA < +85°C, PIN = -10 dBm	+0.2/-0.2			dB
	-55°C < TA < +125°C, PIN = -10 dBm	+0.3/-0.4			dB
Slope	Calibration at -10 dBm and +8 dBm	2.1			V/V _{PEAK}
Intercept	Calibration at -10 dBm and +8 dBm	5			mV

SPECIFICATIONS

Table 1. (Continued)

Parameter	Test Conditions/Comments	Min	Typ ¹	Max	Unit
Output Voltage	$P_{IN} = +10 \text{ dBm}$ $P_{IN} = -10 \text{ dBm}$	2.2	V	0.22	V
FREQUENCY = 10 GHz	Input RFIN to output VOUT				
Detection Range	CW input	46	dB		
±1 dB Error					
Maximum Input Level, ±1 dB	Three point calibration at -28 dBm, -10 dBm, and +10 dBm	16	dBM		
Minimum Input Level, ±1 dB	Three point calibration at -28 dBm, -10 dBm, and +10 dBm	-30	dBM		
Deviation vs. Temperature	Deviation from output at 25°C -40°C < T_A < +85°C, $P_{IN} = 10 \text{ dBm}$ -55°C < T_A < +125°C, $P_{IN} = 10 \text{ dBm}$ -40°C < T_A < +85°C, $P_{IN} = -10 \text{ dBm}$ -55°C < T_A < +125°C, $P_{IN} = -10 \text{ dBm}$	+0.2/-0.1 +0.4/-0.2 +0.2/-0.2 +0.4/-0.4	dB		
Slope	Calibration at -10 dBm and +10 dBm	2.1	V/V_{PEAK}		
Intercept	Calibration at -10 dBm and +10 dBm	6	mV		
Output Voltage	$P_{IN} = +10 \text{ dBm}$ $P_{IN} = -10 \text{ dBm}$	2.1	V	0.22	V
FREQUENCY = 15 GHz	Input RFIN to output VOUT				
Detection Range	CW input	47	dB		
±1 dB Error					
Maximum Input Level, ±1 dB	Three point calibration at -28 dBm, -10 dBm, and +10 dBm	16	dBM		
Minimum Input Level, ±1 dB	Three point calibration at -28 dBm, -10 dBm, and +10 dBm	-30	dBM		
Deviation vs. Temperature	Deviation from output at 25°C -40°C < T_A < +85°C, $P_{IN} = +10 \text{ dBm}$ -55°C < T_A < +125°C, $P_{IN} = +10 \text{ dBm}$ -40°C < T_A < +85°C, $P_{IN} = -10 \text{ dBm}$ -55°C < T_A < +125°C, $P_{IN} = -10 \text{ dBm}$	+0.2/-0.2 +0.3/-0.3 +0.2/-0.3 +0.3/-0.6	dB		
Slope	Calibration at -10 dBm and +10 dBm	2.1	V/V_{PEAK}		
Intercept	Calibration at -10 dBm and +10 dBm	6	mV		
Output Voltage	$P_{IN} = +10 \text{ dBm}$ $P_{IN} = -10 \text{ dBm}$	2.1	V	0.22	V
FREQUENCY = 20 GHz	Input RFIN to output VOUT				
Detection Range	CW input	46	dB		
±1 dB Error					
Maximum Input Level, ±1 dB	Three point calibration at -28 dBm, -10 dBm, and +8 dBm	15	dBM		
Minimum Input Level, ±1 dB	Three point calibration at -28 dBm, -10 dBm, and +8 dBm	-30	dBM		
Deviation vs. Temperature	Deviation from output at 25°C -40°C < T_A < +85°C, $P_{IN} = +10 \text{ dBm}$ -55°C < T_A < +125°C, $P_{IN} = +10 \text{ dBm}$ -40°C < T_A < +85°C, $P_{IN} = -10 \text{ dBm}$ -55°C < T_A < +125°C, $P_{IN} = -10 \text{ dBm}$	+0.2/-0.2 +0.3/-0.4 +0.2/-0.3 +0.3/-0.6	dB		
Slope	Calibration at -10 dBm and +8 dBm	2.2	V/V_{PEAK}		
Intercept	Calibration at -10 dBm and +8 dBm	5.5	mV		
Output Voltage	$P_{IN} = +10 \text{ dBm}$ $P_{IN} = -10 \text{ dBm}$	2.3	V	0.246	V

SPECIFICATIONS

Table 1. (Continued)

Parameter	Test Conditions/Comments	Min	Typ ¹	Max	Unit
FREQUENCY = 25 GHz					
Detection Range	Input RFIN to output VOUT				
±1 dB Error	CW input	46			dB
Maximum Input Level, ±1 dB	Three point calibration at -28 dBm, -10 dBm, and +8 dBm	15			dBm
Minimum Input Level, ±1 dB	Three point calibration at -28 dBm, -10 dBm, and +8 dBm	-30			dBm
Deviation vs. Temperature	Deviation from output at 25°C				
-40°C < T _A < +85°C, P _{IN} = +10 dBm		+0.2/-0.2			dB
-55°C < T _A < +125°C, P _{IN} = +10 dBm		+0.3/-0.4			dB
-40°C < T _A < +85°C, P _{IN} = -10 dBm		+0.2/-0.4			dB
-55°C < T _A < +125°C, P _{IN} = -10 dBm		+0.3/-0.7			dB
Slope	Calibration at -14 dBm and +10 dBm	2.3			V/V _{PEAK}
Intercept	Calibration at -14 dBm and +10 dBm	5.5			mV
Output Voltage	P _{IN} = +10 dBm	2.36			V
	P _{IN} = -10 dBm	0.242			V
FREQUENCY = 30 GHz					
Detection Range	Input RFIN to output VOUT				
±1 dB Error	CW input	45			dB
Maximum Input Level, ±1 dB	Three point calibration at -26 dBm, 0 dBm, and +10 dBm	16			dBm
Minimum Input Level, ±1 dB	Three point calibration at -26 dBm, 0 dBm, and +10 dBm	-29			dBm
Deviation vs. Temperature	Deviation from output at 25°C				
-40°C < T _A < +85°C, P _{IN} = +10 dBm		+0.3/-0.2			dB
-55°C < T _A < +125°C, P _{IN} = +10 dBm		+0.4/-0.4			dB
-40°C < T _A < +85°C, P _{IN} = -10 dBm		+0.5/-0.5			dB
-55°C < T _A < +125°C, P _{IN} = -10 dBm		+0.6/-0.8			dB
Slope	Calibration at 0 dBm and +10 dBm	2.3			V/V _{PEAK}
Intercept	Calibration at 0 dBm and +10 dBm	6			mV
Output Voltage	P _{IN} = +10 dBm	2.2			V
	P _{IN} = -10 dBm	0.21			V
FREQUENCY = 35 GHz					
Detection Range	Input RFIN to output VOUT				
±1 dB Error	CW input	44			dB
Maximum Input Level, ±1 dB	Three point calibration at -25 dBm, 0 dBm, and +10 dBm	15			dBm
Minimum Input Level, ±1 dB	Three point calibration at -25 dBm, 0 dBm, and +10 dBm	-29			dBm
Deviation vs. Temperature	Deviation from output at 25°C				
-40°C < T _A < +85°C, P _{IN} = +10 dBm		+0.4/-0.4			dB
-55°C < T _A < +125°C, P _{IN} = +10 dBm		+0.5/-0.6			dB
-40°C < T _A < +85°C, P _{IN} = -10 dBm		+0.5/-0.5			dB
-55°C < T _A < +125°C, P _{IN} = -10 dBm		+0.6/-1.6			dB
Slope	Calibration at 0 dBm and 10 dBm	2.4			V/V _{PEAK}
Intercept	Calibration at 0 dBm and 10 dBm	6			mV
Output Voltage	P _{IN} = +10 dBm	2.3			V
	P _{IN} = -10 dBm	0.198			V

SPECIFICATIONS

Table 1. (Continued)

Parameter	Test Conditions/Comments	Min	Typ ¹	Max	Unit
FREQUENCY = 40 GHz					
Detection Range	Input RFIN to output VOUT				
±1 dB Error	CW input		42		dB
Maximum Input Level, ±1 dB	Three point calibration at -20 dBm, 0 dBm, and +10 dBm		17		dBm
Minimum Input Level, ±1 dB	Three point calibration at -20 dBm, 0 dBm, and +10 dBm		-25		dBm
Deviation vs. Temperature	Deviation from output at 25°C				
	-40°C < T _A < +85°C, P _{IN} = +10 dBm		+0.2/-0.2		dB
	-55°C < T _A < +125°C, P _{IN} = +10 dBm		+0.3/-0.3		dB
	-40°C < T _A < +85°C, P _{IN} = -10 dBm		+0.5/-0.5		dB
	-55°C < T _A < +125°C, P _{IN} = -10 dBm		+0.6/-0.9		dB
Slope	Calibration at 0 dBm and 10 dBm		1.7		V/V _{PEAK}
Intercept	Calibration at 0 dBm and 10 dBm		4		mV
Output Voltage	P _{IN} = +10 dBm		1.64		V
	P _{IN} = -10 dBm		0.135		V
FREQUENCY = 43.5 GHz					
Detection Range	Input RFIN to output VOUT				
±1 dB Error	CW input		41		dB
Maximum Input Level, ±1 dB	Three point calibration at -20 dBm, 0 dBm, and +10 dBm		17		dBm
Minimum Input Level, ±1 dB	Three point calibration at -20 dBm, 0 dBm, and +10 dBm		-24		dBm
Deviation vs. Temperature	Deviation from output at 25°C				
	-40°C < T _A < +85°C, P _{IN} = +10 dBm		+0.6/-0.4		dB
	-55°C < T _A < +125°C, P _{IN} = +10 dBm		+0.7/-0.7		dB
	-40°C < T _A < +85°C, P _{IN} = -10 dBm		+0.7/-0.5		dB
	-55°C < T _A < +125°C, P _{IN} = -10 dBm		+0.8/-1.1		dB
Slope	Calibration at 0 dBm and 10 dBm		1.6		V/V _{PEAK}
Intercept	Calibration at 0 dBm and 10 dBm		3.5		mV
Output Voltage	P _{IN} = +10 dBm		1.46		V
	P _{IN} = -10 dBm		0.118		V
OUTPUT INTERFACE	Pin VOUT				
DC Output Resistance		<5			Ω
Output Offset	P _{IN} = off		4		mV
Maximum Output Voltage	T _A = 25°C, VPOS = 5.0 V, P _{IN} = 19 dBm		4.3		V
Available Output Current	Sourcing/sinking		5/0.3		mA
Rise Time	P _{IN} = off to 0 dBm, 10% to 90%, C _{LOAD} = 10 pF, R _{SERIES} = 100 Ω		4		ns
Fall Time	P _{IN} = off to 0 dBm, 10% to 90%, C _{LOAD} = 10 pF, R _{SERIES} = 100 Ω		50		ns
Envelope Bandwidth	3 dB bandwidth		40		MHz
POWER SUPPLIES	Pin VPOS				
Supply Voltage		4.75	5.0	5.25	V
Quiescent Current	T _A = 25°C, no signal at RFIN, VPOS = 5.0 V		1.6		mA
	-40°C < T _A < +85°C		2.0		mA
	-55°C < T _A < +125°C		2.2		mA

¹ Slashes in the typical (typ) column indicate a range. For example, -0.2/+0.1 means -0.2 to +0.1.

ABSOLUTE MAXIMUM RATINGS

Table 2.

Parameter	Rating
Supply Voltage, V _{POS}	5.5 V
Input RF Power ¹	20 dBm
Equivalent Voltage, Sine Wave Input	3.16 V
Internal Power Dissipation	20 mW
θ_{JC}^2	16.4°C/W
θ_{JA}^2	82.9°C/W
Ψ_{JT}^2	0.6°C/W
Ψ_{JB}^2	49.3°C/W
Maximum Junction Temperature	150°C
Operating Temperature Range	
ADL6010ACPZN-R7	-40°C < T _A < +85°C
ADL6010SCPZN-R7	-55°C < T _A < +125°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering 60 sec)	300°C

¹ Driven from a 50 Ω source.

² No airflow when the exposed pad soldered to a 4-layer JEDEC board.

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS

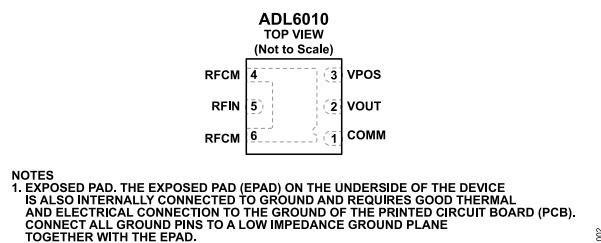


Figure 2. 6-Lead LFCSP Pin Configuration

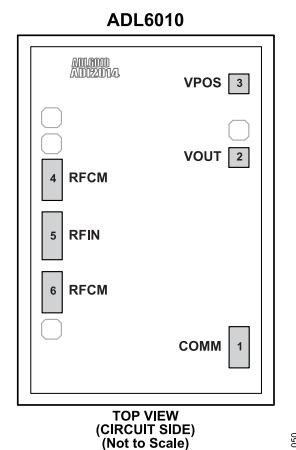


Figure 3. 6-Pad Bare Die Pin Configuration

Table 3. Pin Function Descriptions

Pin No.	Mnemonic	Description
1	COMM	Device Ground. Connect COMM to the system ground using a low impedance ground plane together with the exposed pad (EPAD).
2	VOUT	Output Voltage. The output from the VOUT pin is proportional to the envelope value at the RFIN pin.
3	VPOS	Supply Voltage. The operational range is from 4.75 V to 5.25 V. Decouple the power supply using the suggested capacitor values of 100 pF and 0.1 μ F and locate these capacitors as close as possible to the VPOS pin.
4, 6	RFCM	Device Grounds. Connect the RFCM pins to the system ground using a low impedance ground plane together with the exposed pad (EPAD).
5	RFIN	Signal Input. The RFIN pin is ac-coupled and has an RF input impedance of approximately 50 Ω .
1	EPAD ¹	Exposed Pad. The exposed pad (EPAD) on the underside of the device is also internally connected to ground and requires good thermal and electrical connection to the ground of the printed circuit board (PCB). Connect all ground pins to a low impedance ground plane together with the EPAD.

¹ Not applicable for the 6-pad bare die.

TYPICAL PERFORMANCE CHARACTERISTICS

$V_{POS} = 5.0$ V, C_{LOAD} = open, $T_A = 25^\circ\text{C}$, unless otherwise specified. Error referred to slope and intercept at indicated calibration points. Single-ended input drive, input RF signal is a continuous sine wave, unless otherwise noted.

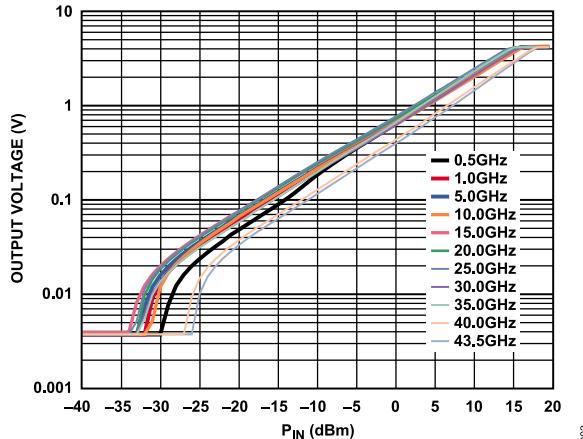


Figure 4. Typical Output Voltage (V_{OUT}) vs. RF Input Power (P_{IN}) at Various Frequencies (0.5 GHz to 43.5 GHz) at 25°C

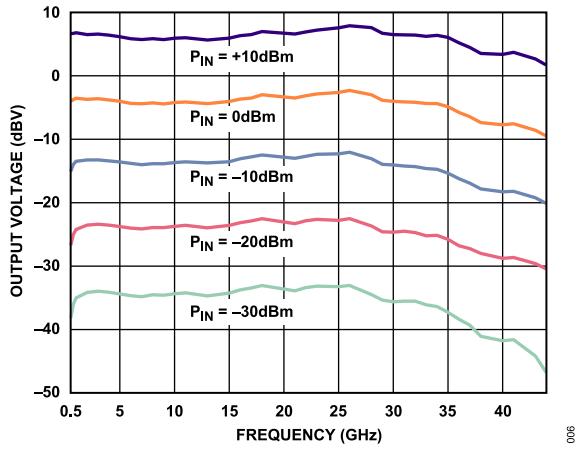


Figure 5. Output Voltage (V_{OUT}) Flatness vs. Frequency for Five RF Input Power Values (P_{IN})

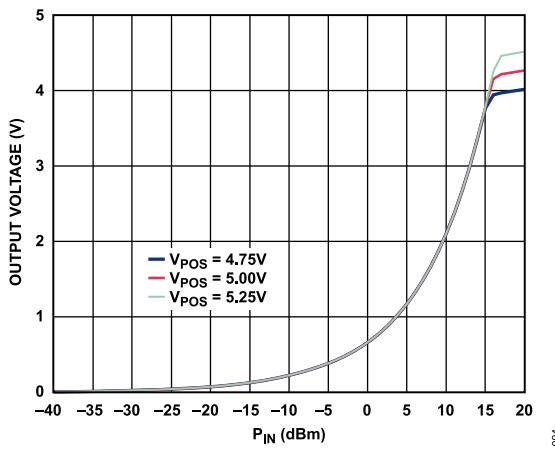


Figure 6. Output Voltage (V_{OUT}) vs. RF Input Power (P_{IN}) for Various Supply Voltages

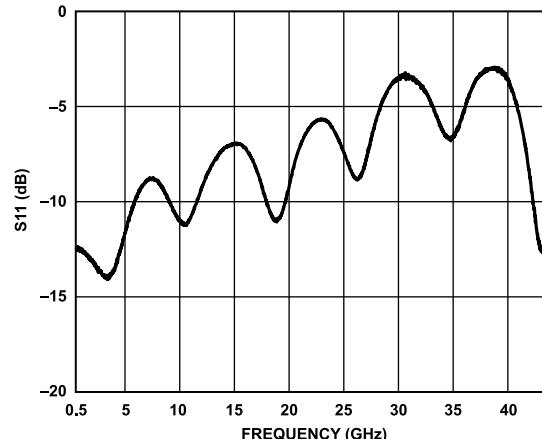


Figure 7. Input Return Loss (S_{11}) vs. Input Frequency with Input Connector and PCB Trace Embedded

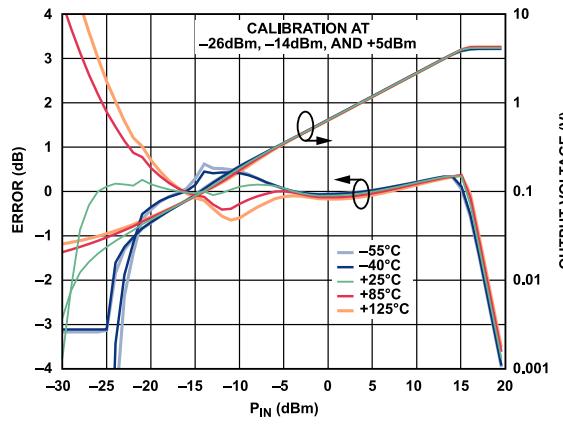


Figure 8. Conformance Error and Output Voltage (V_{OUT}) vs. RF Input Power (P_{IN}) for Various Temperatures at 0.5 GHz

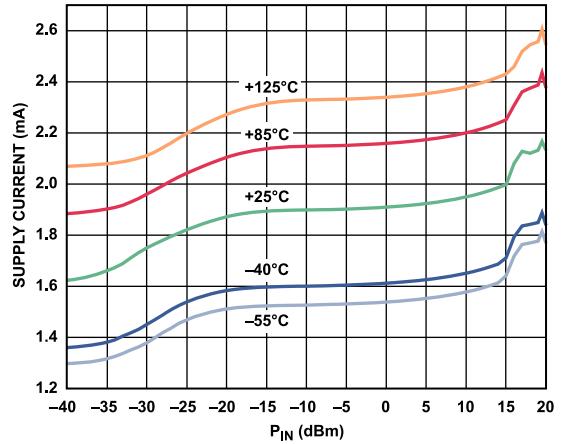


Figure 9. Supply Current vs. RF Input Power (P_{IN}) for Various Temperatures

TYPICAL PERFORMANCE CHARACTERISTICS

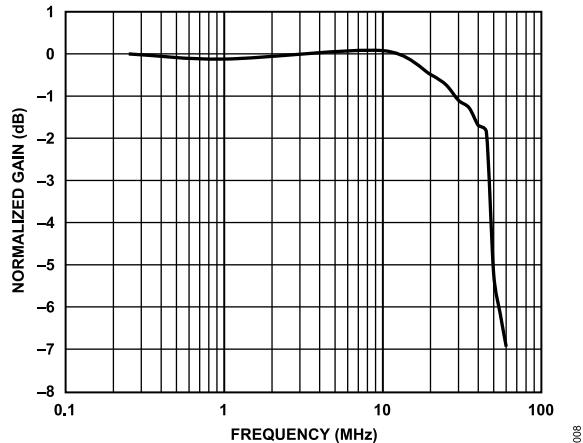


Figure 10. Envelope Bandwidth of V_{OUT} vs. Frequency at $P_{IN} = -10$ dBm and Modulation Depth = 10% (See Figure 39 in the Measurement Setups Section)

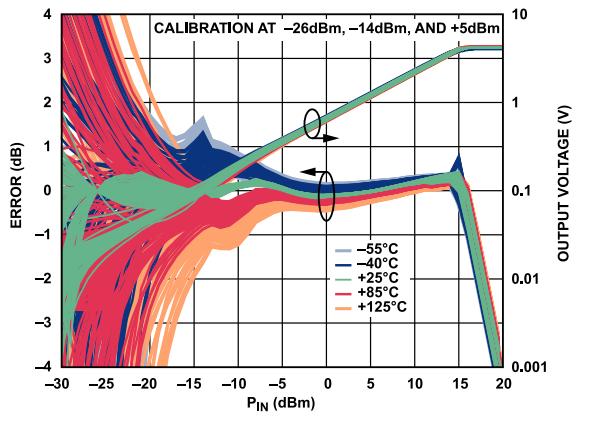


Figure 11. Distribution of Conformance Error with Respect to Output Voltage (V_{OUT}) at 25°C vs. RF Input Power (P_{IN}) for Various Temperatures at 0.5 GHz

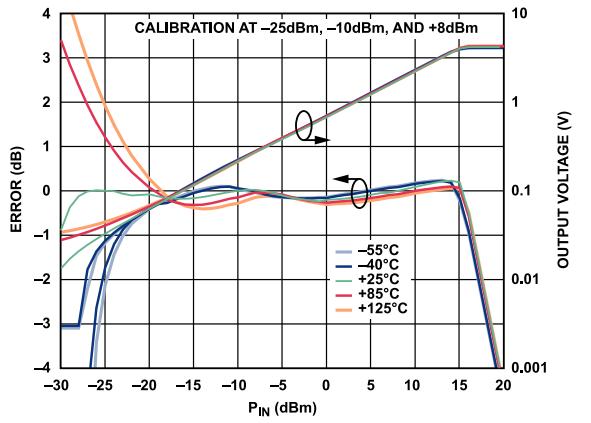


Figure 12. Conformance Error and Output Voltage (V_{OUT}) vs. RF Input Power (P_{IN}) for Various Temperatures at 1 GHz

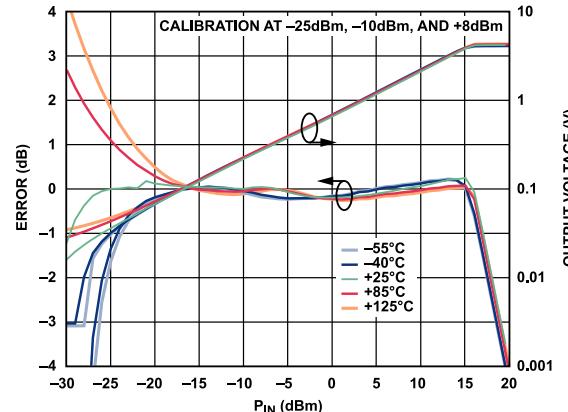


Figure 13. Conformance Error and Output Voltage (V_{OUT}) vs. RF Input Power (P_{IN}) for Various Temperatures at 5 GHz

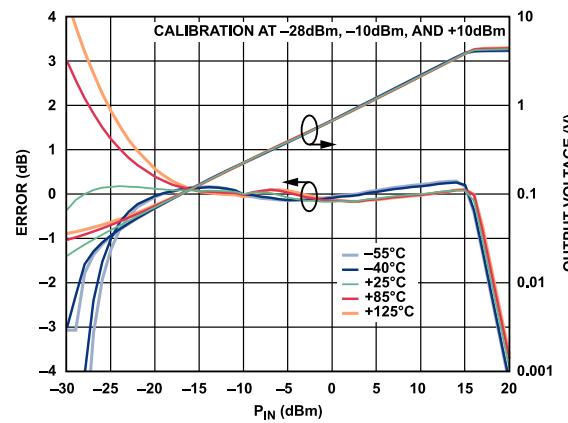


Figure 14. Conformance Error and Output Voltage (V_{OUT}) vs. RF Input Power (P_{IN}) for Various Temperatures at 10 GHz

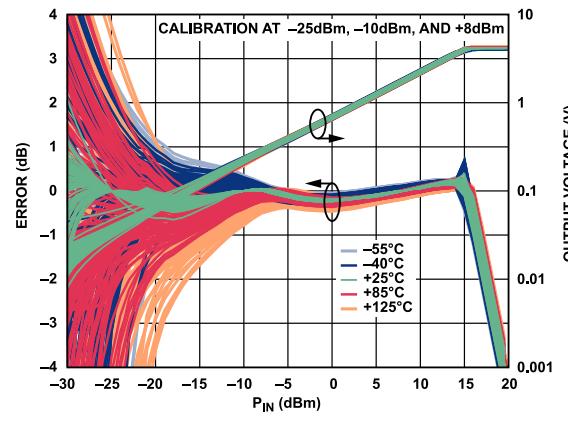


Figure 15. Distribution of Conformance Error with Respect to Output Voltage (V_{OUT}) at 25°C vs. RF Input Power (P_{IN}) for Various Temperatures at 1 GHz

TYPICAL PERFORMANCE CHARACTERISTICS

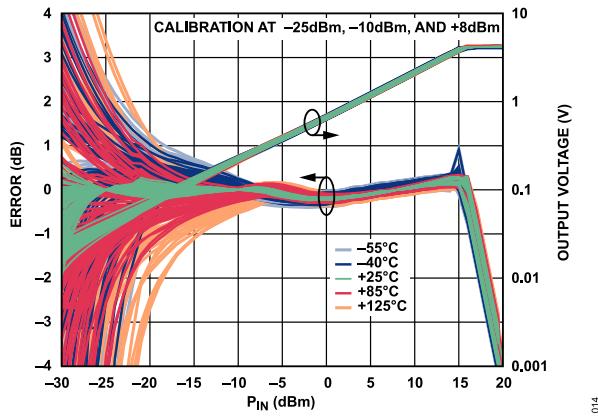


Figure 16. Distribution of Conformance Error with Respect to Output Voltage (V_{OUT}) at 25°C vs. RF Input Power (P_{IN}) for Various Temperatures at 5 GHz

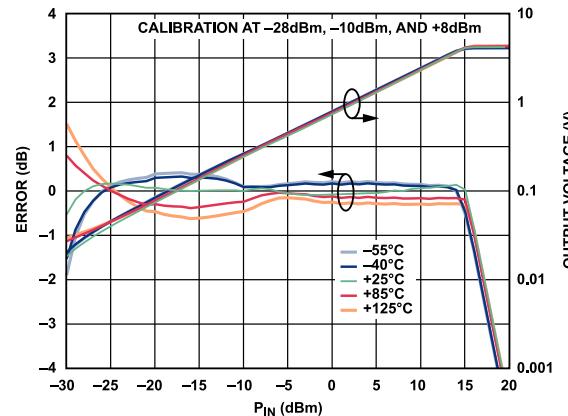


Figure 19. Conformance Error and Output Voltage (V_{OUT}) vs. RF Input Power (P_{IN}) for Various Temperatures at 20 GHz

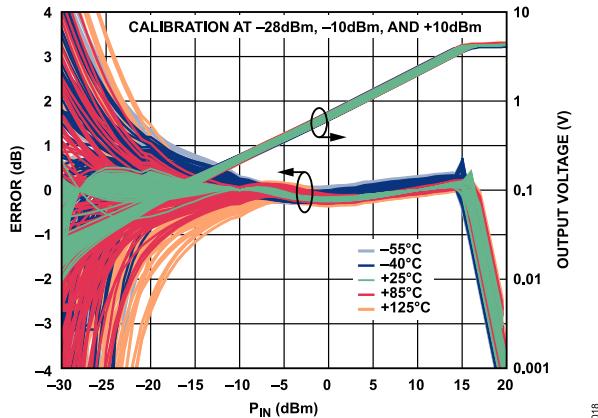


Figure 17. Distribution of Conformance Error with Respect to Output Voltage (V_{OUT}) at 25°C vs. RF Input Power (P_{IN}) for Various Temperatures at 10 GHz

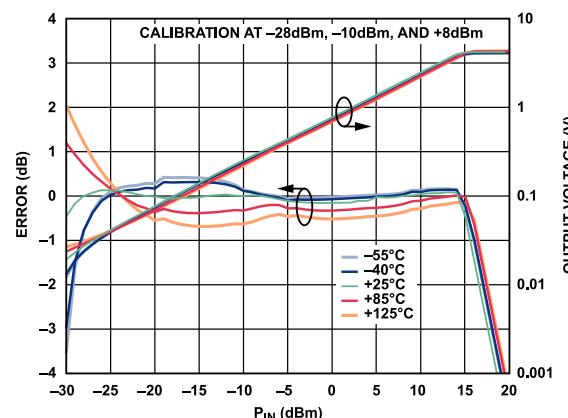


Figure 20. Conformance Error and Output Voltage (V_{OUT}) vs. RF Input Power (P_{IN}) for Various Temperatures at 25 GHz

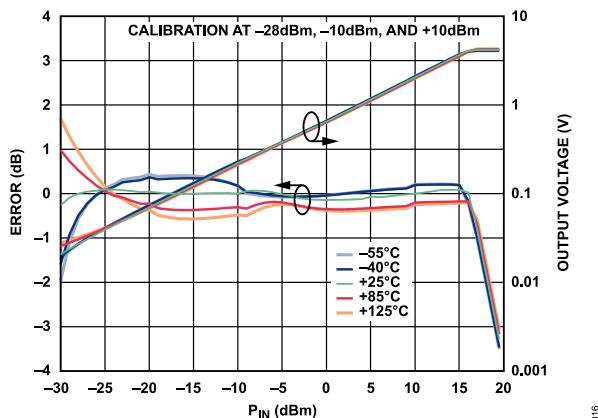


Figure 18. Conformance Error and Output Voltage (V_{OUT}) vs. RF Input Power (P_{IN}) for Various Temperatures at 15 GHz

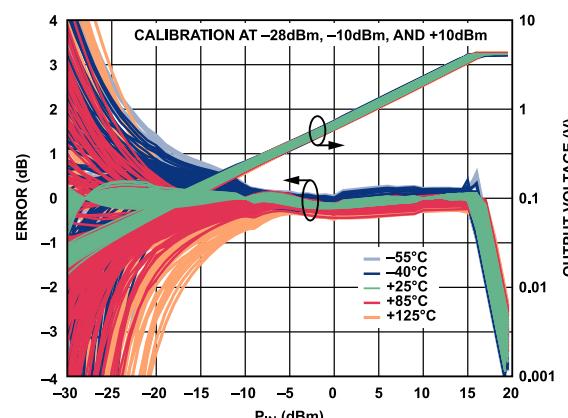


Figure 21. Distribution of Conformance Error with Respect to Output Voltage (V_{OUT}) at 25°C vs. RF Input Power (P_{IN}) for Various Temperatures at 15 GHz

TYPICAL PERFORMANCE CHARACTERISTICS

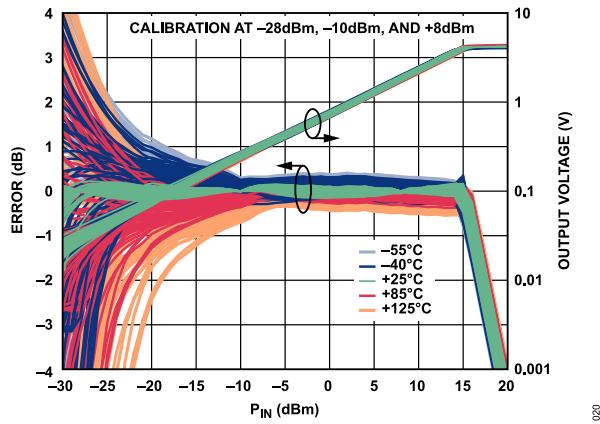


Figure 22. Distribution of Conformance Error with Respect to Output Voltage (V_{OUT}) at 25°C vs. RF Input Power (P_{IN}) for Various Temperatures at 20 GHz

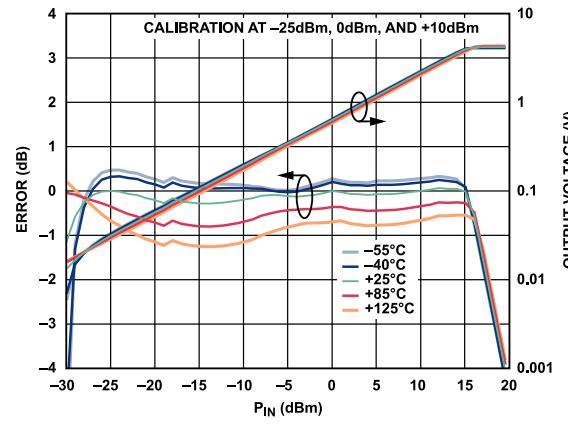


Figure 25. Conformance Error and Output Voltage (V_{OUT}) vs. RF Input Power (P_{IN}) for Various Temperatures at 35 GHz

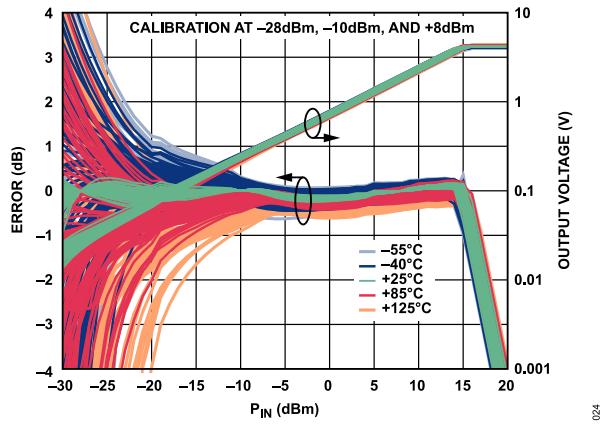


Figure 23. Distribution of Conformance Error with Respect to Output Voltage (V_{OUT}) at 25°C vs. RF Input Power (P_{IN}) for Various Temperatures at 25 GHz

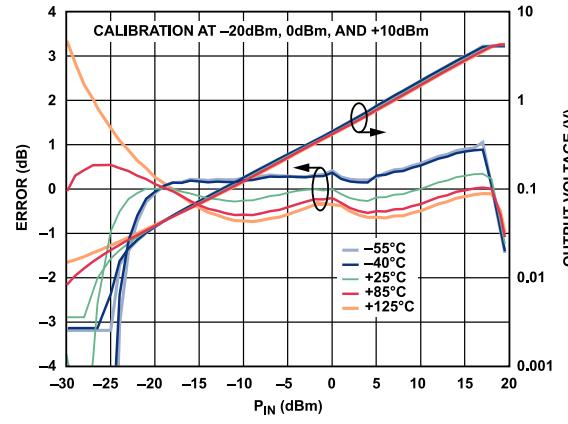


Figure 26. Conformance Error and Output Voltage (V_{OUT}) vs. RF Input Power (P_{IN}) for Various Temperatures at 40 GHz

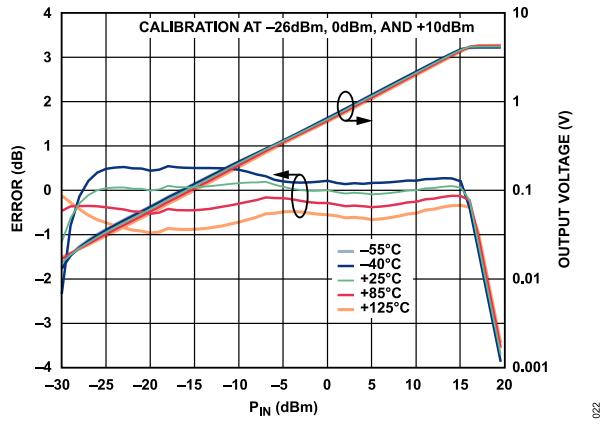


Figure 24. Conformance Error and Output Voltage (V_{OUT}) vs. RF Input Power (P_{IN}) for Various Temperatures at 30 GHz

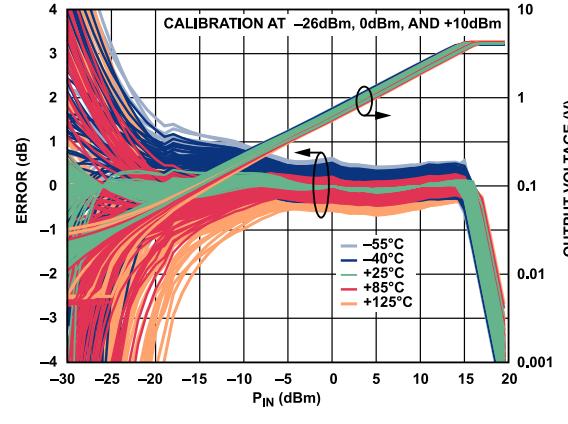


Figure 27. Distribution of Conformance Error with Respect to Output Voltage (V_{OUT}) at 25°C vs. RF Input Power (P_{IN}) for Various Temperatures at 30 GHz

TYPICAL PERFORMANCE CHARACTERISTICS

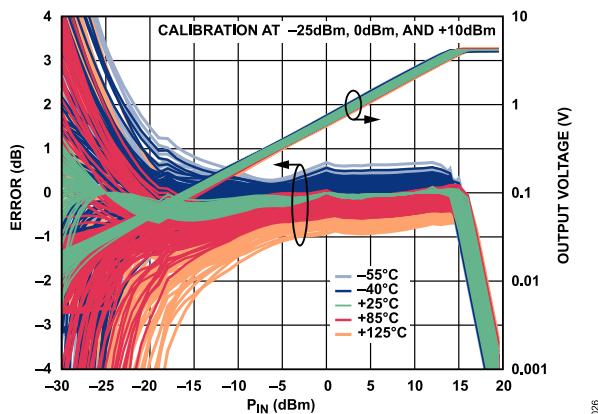


Figure 28. Distribution of Conformance Error with Respect to Output Voltage (V_{OUT}) at 25°C vs. RF Input Power (P_{IN}) for Various Temperatures at 35 GHz

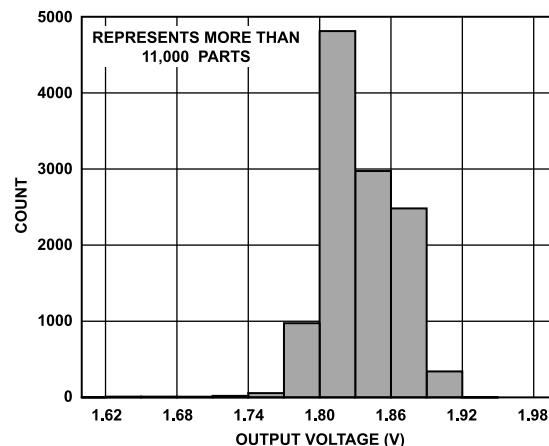


Figure 31. Output Voltage (V_{OUT}) Distribution, $P_{IN} = 9$ dBm at 12 GHz, 25°C

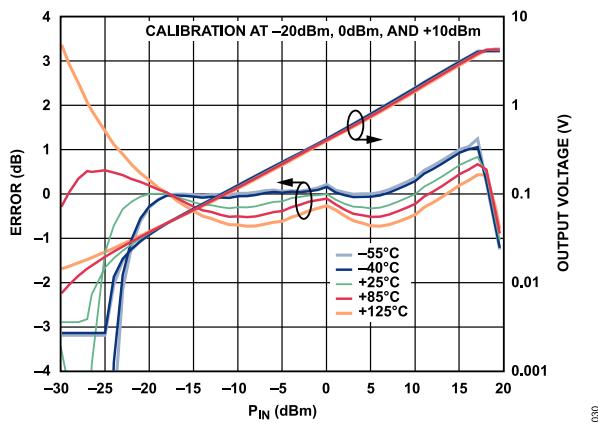


Figure 29. Conformance Error and Output Voltage (V_{OUT}) vs. RF Input Power (P_{IN}) for Various Temperatures at 43.5 GHz

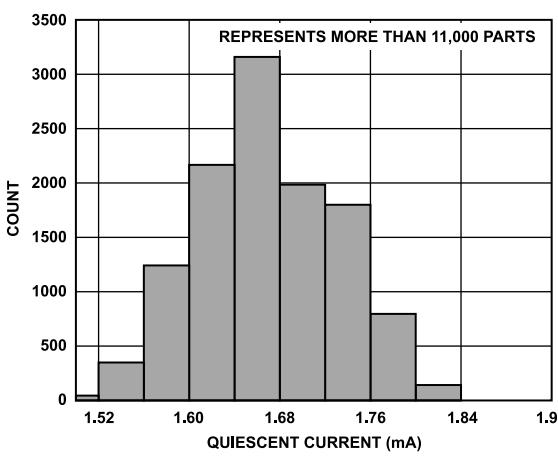


Figure 32. Distribution of Quiescent Current at 25°C

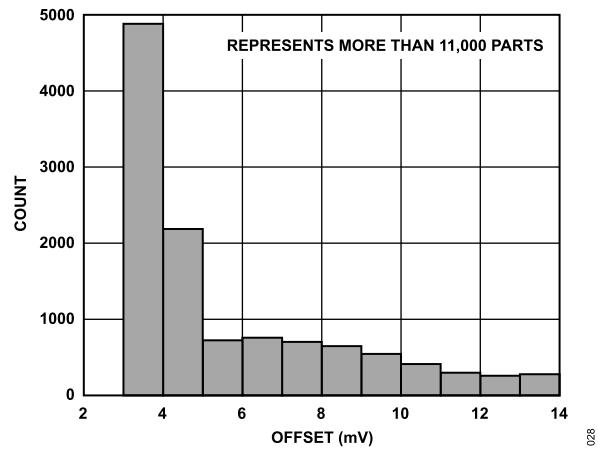


Figure 30. Distribution of V_{OUT} Offset with No Applied P_{IN} at 25°C

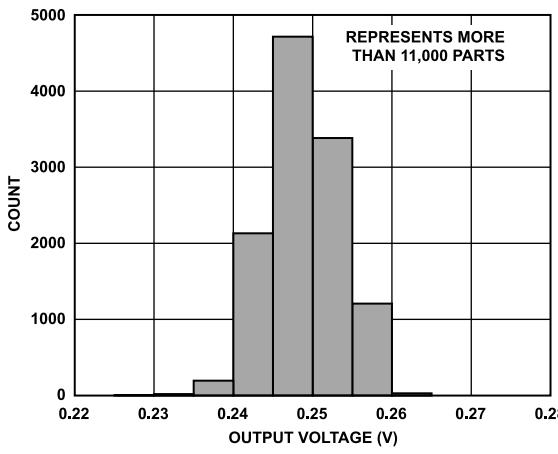


Figure 33. Output Voltage (V_{OUT}) Distribution, $P_{IN} = -9$ dBm at 12 GHz, 25°C

TYPICAL PERFORMANCE CHARACTERISTICS

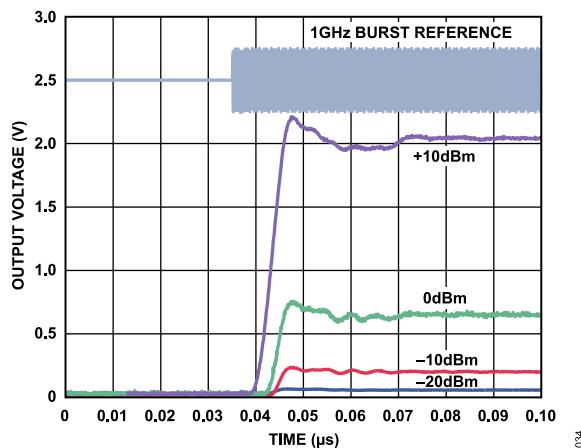


Figure 34. RF Burst Input Response, Rising Edge (see Figure 37 in the Measurement Setups Section)

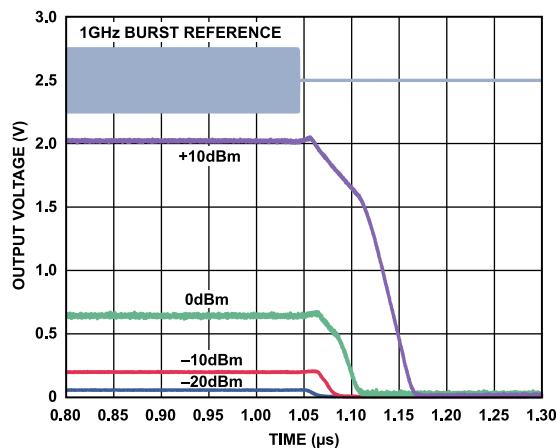


Figure 36. RF Burst Input Response, Falling Edge (see Figure 37 in the Measurement Setups Section)


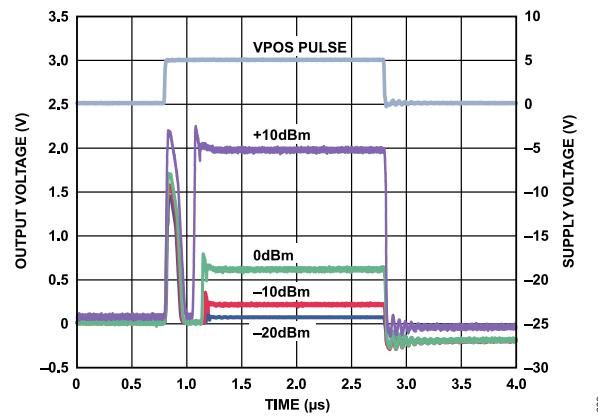



Figure 35. VPOS Turn-On Pulse Response (see Figure 38 in the Measurement Setups Section)

MEASUREMENT SETUPS

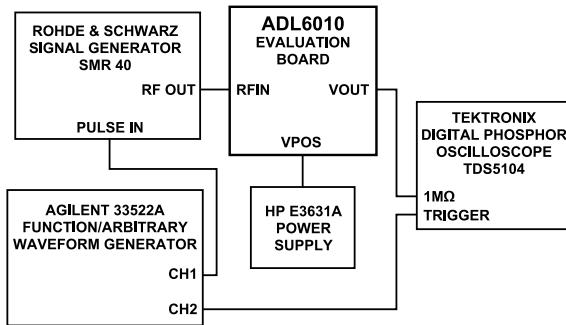


036

Figure 37. Hardware Configuration for Output Response to RF Burst Input Measurements

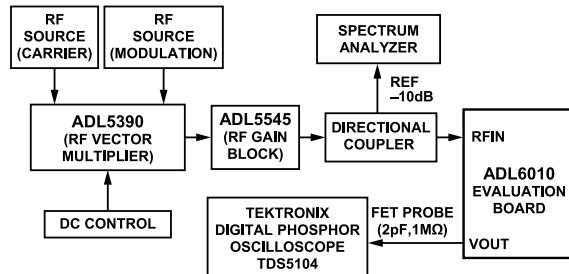

037

Figure 39. Hardware Configuration for Envelope Output Response Measurement

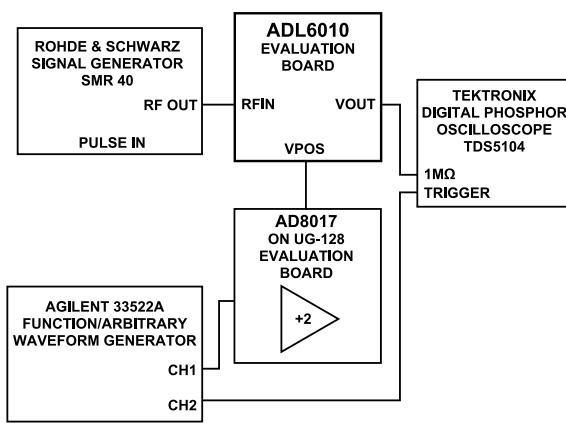

038

Figure 38. Hardware Configuration for Output Response to Power Supply Gating Measurements

THEORY OF OPERATION

The ADL6010 uses eight Schottky diodes in a novel two path detector topology. One path responds during the positive half cycles of the input, and the second responds during the negative half cycles of the input, thus achieving full wave rectification. This arrangement presents a constant input impedance throughout the full RF cycle, thereby preventing the reflection of even-order distortion components back toward the source, which is a well-known limitation of the widely used traditional single Schottky diode detectors.

Eight diodes are arranged on the chip in such a way as to minimize the effect of chip stresses and temperature variations. They are biased by small keep alive currents chosen in a trade-off between the inherently low sensitivity of a diode detector and the need to preserve envelope bandwidth. Thus, the corner frequency of the front-end low-pass filtering is a weak function of the input level. At low input levels, the -3 dB corner frequency is at approximately 0.5 GHz. The overall envelope bandwidth is limited mainly by the subsequent linearizing and output circuitry.

At small input levels, all Schottky diode detectors exhibit an extremely weak response which approximates a square law characteristic (having zero slope at the origin). For large inputs, the response approaches a linear transfer function. In the ADL6010, this nonlinearity and variations in the response are corrected using proprietary circuitry having an equally shaped but inverse amplitude function, resulting in an overall envelope response that is linear across the whole span of input levels.

The composite signal is buffered and presented at the output pin (VOUT). The transfer function relating the instantaneous RF voltage amplitude to the quasi-dc output is a scalar constant of a little over $\times 2$. This scalar constant is mainly determined by ratios of resistors, which are independent of temperature and process variations. Errors associated with the minuscule voltages generated by the Schottky front-end under low level conditions, and other errors in the nonlinear signal processing circuitry, are minimized by laser trimming, permitting accurate measurement of RF input voltages down to the millivolts level. An aspect of the linear in volts response is that the minimum V_{OUT} is limited by the ability of the output stage to reach down to absolute zero (the potential on the COMM pin) when using a single positive supply.

DC voltages at the input are blocked by an on-chip capacitor. The two ground pins (RFCM) on either side of RFIN (Pin 5) form part of an RF coplanar waveguide (CPW) launch into the detector. The RFCM pins must be connected to the signal ground. Give careful attention to the design of the PCB in this area.

The envelope voltage gain of the ADL6010 is nominally $\times 2.2$ V/VPEAK from 1 GHz to 35 GHz. This factor becomes 3.2 V/V when the input signal is specified as the rms voltage of a CW carrier. For example, a steady -30 dBm input generates a dc output voltage of 22.5 mV, at which level the output buffer is able to track the envelope. In fact, the sensitivity at ambient temperatures typically extends below -30 dBm. However, over the specified temperature

range, the measurement error tends to increase at the bottom of the specified range.

For large inputs, the voltage headroom in the signal processing stages limits the measurement range. Using a 5 V supply, the maximum signal is approximately 3.6 V p-p, corresponding to a power of 15 dBm, referenced to $50\ \Omega$. Therefore, the ADL6010 achieves a 45 dB dynamic range of high accuracy measurement. Note that, above 43.5 GHz, accuracy is limited by the package, PCB, and instrumentation. The RF input interface provides a broadband (flat) $50\ \Omega$ termination without the need for external components. Although the input return loss inevitably degrades at very high frequencies, the slope of the transfer function holds near 2.2 V/VPEAK up to 35 GHz, owing to the voltage responding behavior of the ADL6010.

BASIC CONNECTIONS

The basic connections are shown in Figure 40. A dc supply of nominally 5 V is required. The bypass capacitors (C1 and C2) provide supply decoupling for the output buffer. Place these capacitors as close as possible to the VPOS pin. The exposed pad is internally connected to the IC ground and must be soldered down to a low impedance ground on the PCB. A filter capacitor (C_{LOAD}) and series resistor ($R1$) may be inserted to form a low-pass filter for the output envelope. Small C_{LOAD} values allow a quicker response to an RF burst waveform, and high C_{LOAD} values provide signal averaging and noise reduction.

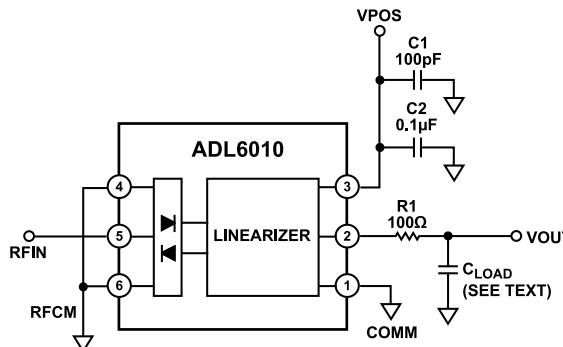


Figure 40. Basic Connections

PCB LAYOUT RECOMMENDATIONS

Parasitic elements of the PCB such as coupling and radiation limit accuracy at very high frequencies. Ensure faithful power transmission from the connector to the internal circuit of the ADL6010. Microstrip and CPW are popular forms of transmission lines because of their ease of fabrication and low cost. In the ADL6010 evaluation board, a grounded CPW (GCPW) minimizes radiation effects and provides the maximum bandwidth by using two rows of grounding vias on both sides of the signal trace.

Figure 41 shows the PCB layout of the ADL6010 evaluation board in detail. Minimize air gaps between the vias to ensure reliable transmission. Because a certain minimum distance between two adjacent grounding vias in a single row is needed, adding a second

THEORY OF OPERATION

row of grounding vias on both sides of the GCPW is recommended. In this way, a much smaller equivalent air gap between grounding vias is achieved, and better transmission is accomplished.

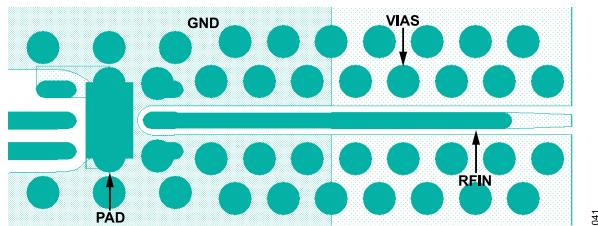


Figure 41. ADL6010 Evaluation Board

SYSTEM CALIBRATION AND ERROR CALCULATION

The measured transfer function of the ADL6010 at 10 GHz is shown in Figure 42. This plots both the conformance error and the output voltage vs. the input level at $+25^{\circ}\text{C}$, $+85^{\circ}\text{C}$, $+125^{\circ}\text{C}$, -40°C , and -55°C . Over the input level range from -30 dBm to $+15 \text{ dBm}$, the output voltage varies from approximately 20 mV to 4.3 V.

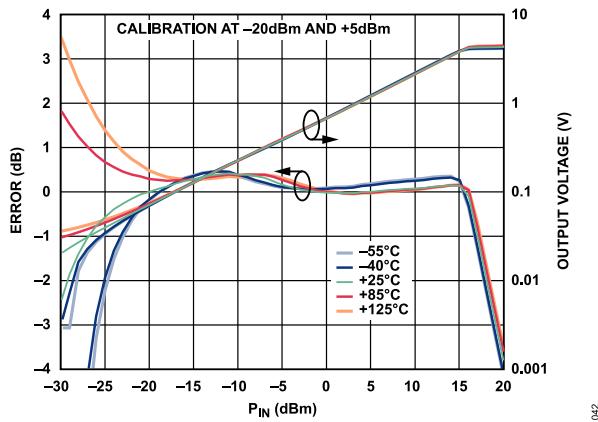


Figure 42. Conformance Error and Output Voltage vs. RF Input Power (P_{IN}) for Various Temperatures (-55°C , -40°C , $+25^{\circ}\text{C}$, $+85^{\circ}\text{C}$, and $+125^{\circ}\text{C}$) at 10 GHz Using Two Point Calibration

To achieve the highest measurement accuracy, perform calibration at the board level, as the IC scaling varies from device to device.

Calibration begins by applying two or more known signal levels, V_{IN1} and V_{IN2} , within the operating range of the IC, and noting the corresponding outputs, V_{OUT1} and V_{OUT2} . From these measurements, the slope and intercept of the scaling is extracted.

For a two point calibration, the calculations are as follows:

$$\text{Slope} = (V_{OUT2} - V_{OUT1}) / (V_{IN2} - V_{IN1}) \quad (1)$$

$$\text{Intercept} = V_{OUT1} - (\text{Slope} \times V_{IN1}) \quad (2)$$

where:

Each V_{IN} is the equivalent peak input voltage to RFIN, at a 50Ω input impedance.

Once the slope and intercept are calculated and stored, use the following simple equations to calculate the unknown input power:

$$V_{IN_CALCULATED} = (V_{OUT\text{ (MEASURED)}} - \text{Intercept}) / \text{Slope} \quad (3)$$

$$P_{IN_CALCULATED} (\text{dBm}) = 10 \log_{10}(1000 \times (V_{IN_CALCULATED} / 2)^2 / 50) \quad (4)$$

The conformance error is

$$\text{Error (dB)} = P_{IN_CALCULATED} (\text{dBm}) - P_{IN_IDEAL} (\text{dBm}) \quad (4)$$

Figure 42 includes a plot of this error at -55°C , -40°C , $+25^{\circ}\text{C}$, $+85^{\circ}\text{C}$, and $+125^{\circ}\text{C}$ when using a two point calibration with inputs at $+5 \text{ dBm}$ and -20 dBm . The relative error at these two calibration points is equal to 0 dB by definition.

Multipoint calibration can be used to further improve accuracy and extend the dynamic range. The transfer function is now broken into segments, with each having its own slope and intercept. Thus, Figure 43 shows the error plot of the same test device with calibration input points of -28 dBm , -10 dBm , and $+10 \text{ dBm}$. The three point, dual slope calibration results in tighter error bounds over the high end of the range and extends the lower measurement range to -30 dBm for $\pm 1 \text{ dB}$ error.

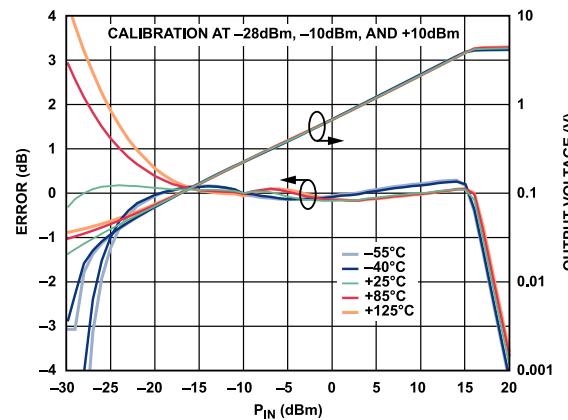


Figure 43. Conformance Error and Output Voltage vs. RF Input Power (P_{IN}) and Temperature (-55°C , -40°C , $+25^{\circ}\text{C}$, $+85^{\circ}\text{C}$, $+125^{\circ}\text{C}$) at 10 GHz Using Three Point Calibration

For the device shown in Figure 43, the change in error with temperature is very small over the upper 25 dB of the measurement range, being $\pm 0.4 \text{ dB}$, and widens at lower power levels, reaching $\pm 0.9 \text{ dB}$ over the -10 dBm to -20 dBm segment. High volume production samples may perform better.

For comparison, the three point calibration of a second device is shown in Figure 44 using the same frequency and calibration points. This sample has greater dynamic range, and the temperature dependence of error at lower power levels is inverted relative to the first device.

THEORY OF OPERATION

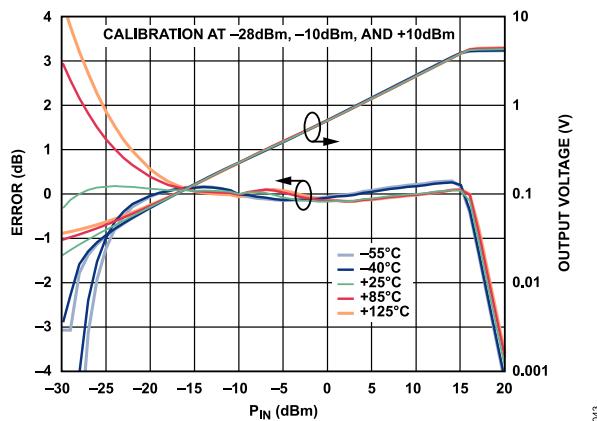


Figure 44. 10 GHz Conformance Error and Output Voltage vs. RF Input Power (P_{IN}) for Second Device at $+25^{\circ}\text{C}$, -40°C , -55°C , $+85^{\circ}\text{C}$, and $+125^{\circ}\text{C}$

Figure 45 shows the conformance error at 10 GHz for four devices at $+25^{\circ}\text{C}$, -40°C , and $+85^{\circ}\text{C}$ using a three point calibration at input levels of -28 dBm, -10 dBm, and $+10$ dBm. The error plots at each temperature were calculated with respect to the slope and intercept values extracted from the 25°C line in each case. This calculation is consistent with a typical production scenario where calibration at only one temperature is used. Figure 45 illustrates the various error scenarios possible at low input levels. The dynamic range of the three point calibrated devices extends to -30 dBm for ± 1.0 dB error at 25°C .

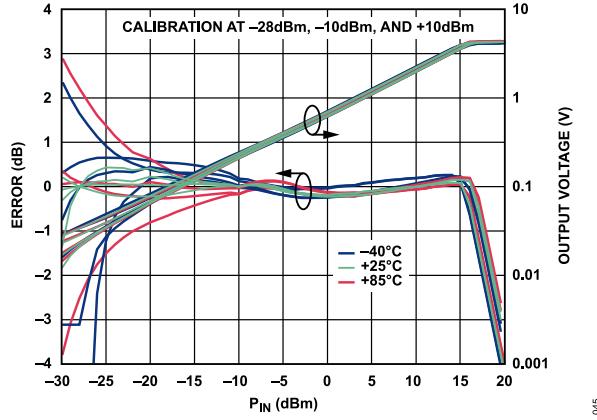


Figure 45. 10 GHz Conformance Error and Output Voltage vs. RF Input Power (P_{IN}) at $+25^{\circ}\text{C}$, $+85^{\circ}\text{C}$, and -40°C for Multiple Devices

EFFECT OF A CAPACITIVE LOAD ON RISE TIME AND FALL TIME

The ADL6010 can measure both the instantaneous envelope power and the average power of an RF signal. When V_{OUT} is unloaded, the output follows the envelope of the input tracking bandwidths up to 40 MHz. By adding a simple RC circuit to the basic connections circuit as shown in Figure 40, the output signal can be averaged using single pole filtering.

In applications where the response bandwidth is fairly low, place a large shunt capacitor, C_{LOAD} , directly on the V_{OUT} pin. Figure 46 shows how rise time and fall time depend on C_{LOAD} when the ADL6010 is driven by a square wave modulated RF input at a carrier frequency of 1 GHz.

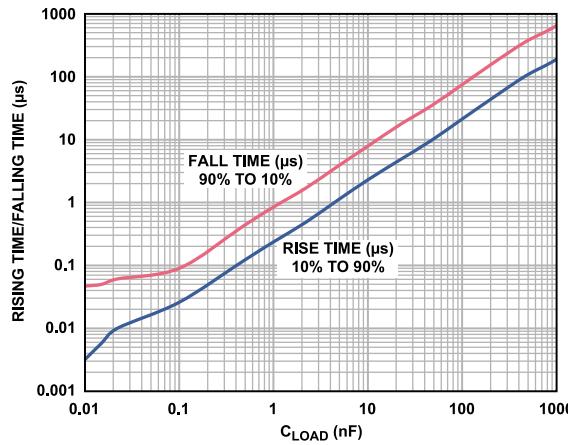


Figure 46. Rising Time/Falling Time vs. C_{LOAD} for a 1 GHz Modulated Pulsed Waveform with $P_{IN} = 0$ dBm

EVALUATION BOARD

The [ADL6010-EVALZ](#) is a fully populated, 4-layer, Rogers 4003-based evaluation board. For normal operation, it only requires a 5 V supply connected to VPOS and GND. The RF input signal is accepted at a high performance 2.92 mm connector (RFIN). The

output voltage is available on the SMA connector (V_{OUT}) or on the test loop (V_{_OUT}). Configuration options for the evaluation board are listed in [Table 4](#).

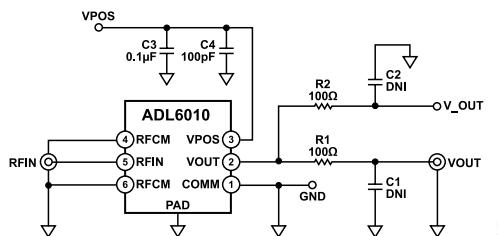


Figure 47. ADL6010 Evaluation Board Schematic

Table 4. Evaluation Board Configuration Options

Component	Function/Comments	Default Value
R1, R2	Output interfaces. Use a $100\ \Omega$ series resistor when driving highly capacitive loads. R2 can be replaced with a $0\ \Omega$ resistor.	R1 = $100\ \Omega$ (0402 size), R2 = $100\ \Omega$ (0402 size)
C1, C2	Output load capacitors. Capacitive load at the output that provides the option of tailoring the RF burst response time. The pads of the capacitors are left open by default.	C1, C2 = open
C3, C4	Bypass capacitors. The capacitors provide supply ac decoupling by forming a return path for the ac signal and reducing the noise reaching the input circuitry. The typical value is $0.1\ \mu\text{F}$.	C3 = $0.1\ \mu\text{F}$ (0402 size), C4 = $100\ \text{pF}$ (0402 size)
RFIN	RF input. Southwest Microwave 2.92 mm connector is used for input interface. To prevent the potential damage of the connectors, 2.92 mm (K type) cables are recommended.	

EVALUATION BOARD

EVALUATION BOARD ASSEMBLY DRAWINGS

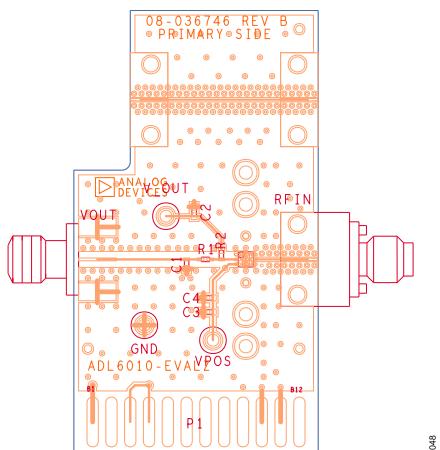


Figure 48. Evaluation Board Layout, Top Side

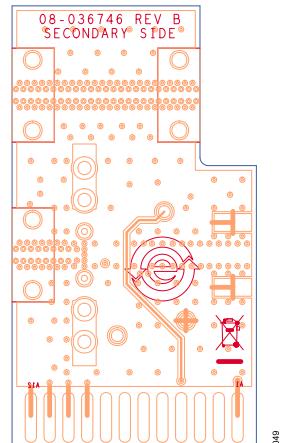


Figure 49. Evaluation Board Layout, Bottom Side

OUTLINE DIMENSIONS

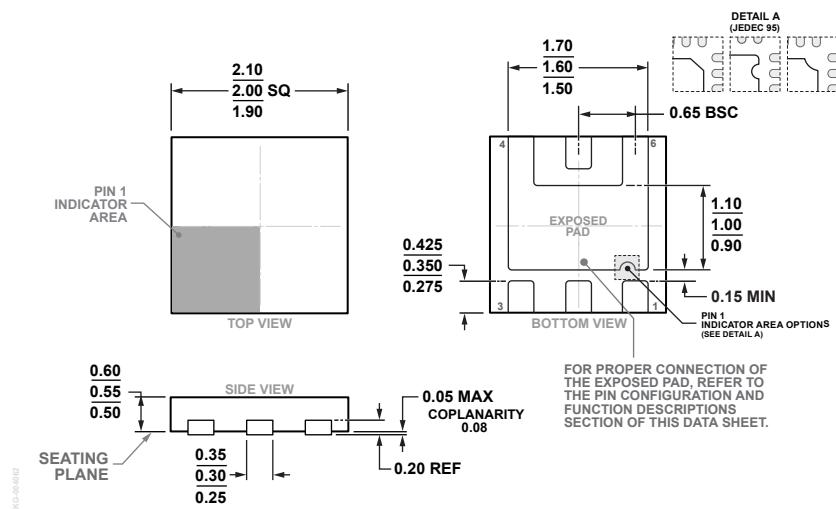


Figure 50. 6-Lead Lead Frame Chip Scale Package [LFCSP]
2.00 mm × 2.00 mm Body and 0.55 mm Package Height
(CP-6-7)
Dimensions shown in millimeters

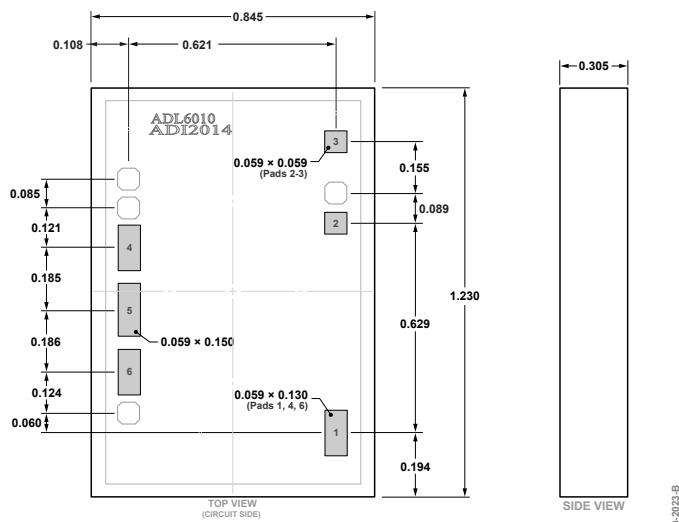


Figure 51. 6-Pad Bare Die [CHIP]
(C-6-14)
Dimensions shown in millimeters

OUTLINE DIMENSIONS

ORDERING GUIDE

Model ¹	Temperature Range	Package Description	Package Option	Ordering Quantity	Marking Code
ADL6010ACPZN	-40°C to +85°C	6-Lead Lead Frame Chip Scale Package [LFCSP]	CP-6-7	Tape, 3000	C1
ADL6010ACPZN-R2	-40°C to +85°C	6-Lead Lead Frame Chip Scale Package [LFCSP]	CP-6-7	Reel, 250	C1
ADL6010ACPZN-R7	-40°C to +85°C	6-Lead Lead Frame Chip Scale Package [LFCSP]	CP-6-7	Reel, 3000	C1
ADL6010SCPZN	-55°C to +125°C	6-Lead Lead Frame Chip Scale Package [LFCSP]	CP-6-7	Tape, 3000	Q23
ADL6010SCPZN-R2	-55°C to +125°C	6-Lead Lead Frame Chip Scale Package [LFCSP]	CP-6-7	Reel, 250	Q23
ADL6010SCPZN-R7	-55°C to +125°C	6-Lead Lead Frame Chip Scale Package [LFCSP]	CP-6-7	Reel, 3000	Q23
ADL6010-CHIPS	-40°C to +85°C	6-Pad Bare Die [CHIP]	CP-6-14	Gelpack, 50	

¹ Z = RoHS Compliant Part.

EVALUATION BOARDS

Model ¹	Description
ADL6010-EVALZ	Evaluation Board

¹ Z = RoHS Compliant Part.

Legal Terms and Conditions

Information furnished by Analog Devices is believed to be accurate and reliable "as is". However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners. All Analog Devices products contained herein are subject to release and availability.