2 GHz to 18 GHz, Single Beam, 4-Element Beamformer

FEATURES

- Wideband, 2 GHz to 18 GHz frequency range
- Single input, quad output
- True time delay core for wideband beam-squint free operation
  - 0 ps to 508 ps range with 4 ps resolution
  - 0 ps to 254 ps range with 2 ps resolution
- 31.5 dB gain adjustment range with 0.5 dB step size
- 4-bit pin-programmable device address setting
- On-chip sequencer
- Beam update via register, RAM, or FIFO
- Programmable amplifier bias

APPLICATIONS

- Phased array communications links
- Satellite communications (SATCOM)
- Phased array radar
- Electronic warfare
- Test and measurement equipment

GENERAL DESCRIPTION

The ADAR4000 is a 2 GHz to 18 GHz single-input, quad-output beamformer IC (BFIC) that is optimized for phased array transmit applications. A true, time delay-based core ensures beam-squint free wideband operation. The full-scale delay of the time delay unit (TDU) can be set to either 254 ps or 508 ps with a minimum step size of 2 ps and 4 ps, respectively. At 2 GHz, this results in a phase adjustment range of 365°, and at 18 GHz, the minimum phase step size is 13°.

Each path also has a 31.5 dB digital step attenuator (DSA) with a step size of 0.5 dB.

Control of all the on-chip registers is through a simple 3-wire or 4-wire serial port interface (SPI). Four address pins allow SPI control of up to 16 devices on the same serial lines.

The on-chip, random access memory (RAM) and first in, first out (FIFO) memory have storage for up to 64 and 16 beamstates, respectively. The on-chip sequencer can be used to select and advance the beamstate, which can be sourced from the RAM or FIFO.

The ADAR4000 is available in a 36-lead 6 mm × 6 mm LFCSP and is specified from −40°C to +85°C.

FUNCTIONAL BLOCK DIAGRAM

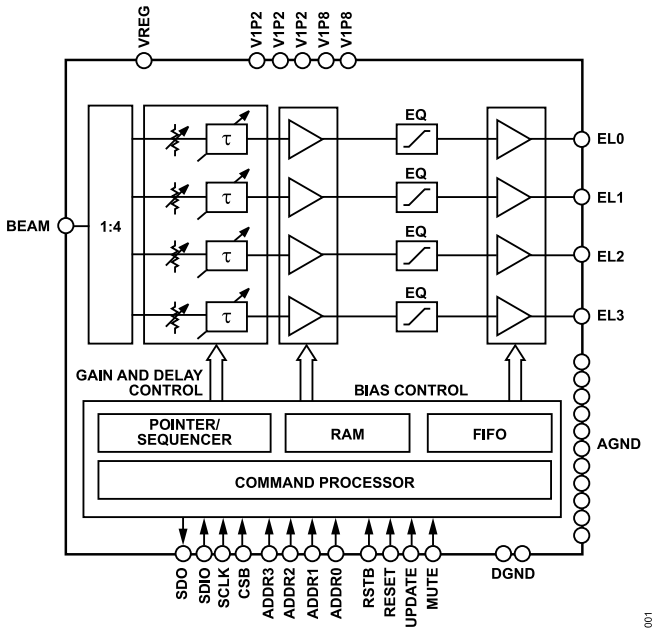


Figure 1. ADAR4000 Functional Block Diagram

For more information about the ADAR4000, contact Analog Devices, Inc., at beamformer@analog.com.

DOCUMENT FEEDBACK
TECHNICAL SUPPORT

Information furnished by Analog Devices is believed to be accurate and reliable "as is". However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners. All Analog Devices products contained herein are subject to release and availability.

NOTES

©2024 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners.
One Analog Way, Wilmington, MA 01887-2356, U.S.A.