

Low Voltage, 2.4Ω Quad SPST Switch

REVISION HISTORY

FEATURES

- ▶ ±1.08V to ±2.75V dual supply
- ▶ +1.08V to +5.5V single supply
- ▶ Low on resistance 2.4Ω
- ▶ 16-lead, 2mm × 2mm LGA
- ▶ 1.8 V and 3 V JEDEC compliant logic
- ▶ Fully specified at +5V, +3.3V, +1.8V, and ±2.5V
- ▶ Rail-to-rail signal range
- ▶ -40 °C to +125 °C operating temperature range

APPLICATIONS

- ▶ Automated test equipment
- ▶ Data acquisition systems
- ▶ Medical equipment
- ▶ FPGA and microcontroller systems
- ▶ Audio and video signal routing
- ▶ Communications systems
- ▶ Relay replacement


GENERAL DESCRIPTION

The ADG1712 contains four independent single-pole/single-throw (SPST) switches and operates with a low-voltage single supply range from +1.08V to +5.5V or a low-voltage dual supply range from ±1.08V to ±2.75V.

The ADG1712 is designed for small size without compromising on performance. The 2mm × 2mm land grid array (LGA) package is ideal for a broad range of applications where area is a concern.

The ADG1712 has a low on resistance of just 2.4Ω and a rail-to-rail input signal range. Each switch conducts equally well in both directions when on. The switches are turned on with a Logic 1 input on the corresponding digital control line, and the digital control inputs are 1.8V and 3V JEDEC compliant for ease of use with microcontrollers and field programmable gate arrays (FPGAs).

FUNCTIONAL BLOCK DIAGRAM

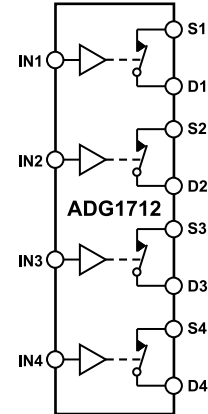

SWITCHES SHOWN FOR A LOGIC 1 INPUT. 

Figure 1. Functional Block Diagram

PRODUCT HIGHLIGHTS

1. 1.08V to 5.5V wide supply range
2. Low on-resistance of 2.4Ω
3. JEDEC standard compliant for both 1.8V and 3V logic levels.
4. 16-lead, 2mm × 2mm LGA.

TABLE OF CONTENTS

| | | | |
|---|---|--|----|
| Revision History..... | 1 | Pin Configuration and Function Descriptions..... | 10 |
| Features..... | 1 | Typical Performance Characteristics..... | 11 |
| Applications..... | 1 | Test Circuits..... | 19 |
| General Description..... | 1 | Terminology..... | 21 |
| Functional Block Diagram..... | 1 | Theory of Operation..... | 22 |
| Product Highlights..... | 1 | Switch Architecture..... | 22 |
| Specifications..... | 3 | 3V and 1.8V JEDEC Compliance..... | 22 |
| Operating Supply Voltages..... | 3 | V _L Flexibility..... | 22 |
| 5V Single Supply..... | 3 | Applications Information..... | 23 |
| +3V Single Supply..... | 4 | Data Acquisition System Calibration..... | 23 |
| +1.8V Single Supply..... | 5 | Output Load for Reduced Overshoot..... | 23 |
| ±2.5V Dual Supply..... | 6 | Power-Supply Rails..... | 23 |
| Continuous Current per Channel, Sx or Dx..... | 8 | Power Supply Recommendations..... | 23 |
| Absolute Maximum Ratings..... | 9 | Outline Dimensions..... | 24 |
| Thermal Resistance..... | 9 | Ordering Guide..... | 24 |
| Electrostatic Discharge (ESD) Ratings..... | 9 | Evaluation Boards..... | 24 |
| ESD Caution..... | 9 | | |

REVISION HISTORY**3/2026—Rev. 0 to Rev. A**

| | |
|---------------------------------|---|
| Change to Features Section..... | 1 |
|---------------------------------|---|

7/2025—Revision 0: Initial Version

SPECIFICATIONS

OPERATING SUPPLY VOLTAGES

Table 1. Operating Voltage Range

| Supply Voltage | Min | Max | Unit |
|----------------|-------|-------|------|
| Dual Supply | ±1.08 | ±2.75 | V |
| Single Supply | +1.08 | +5.5 | V |

5V SINGLE SUPPLY

$V_{DD} = 5V \pm 10\%$, $V_{SS} = 0V$, $GND = 0V$, $V_L = 1.65V$ to $3.6V$, unless otherwise noted.

Table 2. +5 V Single-Supply Specifications

| Parameter | 25°C | -40°C to +85°C | -40°C to +125°C | Unit | Test Conditions/Comments |
|---|----------------------|----------------|-------------------|--|---|
| ANALOG SWITCH | | | | | |
| Analog Signal Range | V_{SS} to V_{DD} | | | V | $V_{DD} = +4.5V$, $V_{SS} = 0V$ |
| On Resistance, R_{ON} | 2.4 | | | Ω typ | Source voltage (V_S) = 0 to V_{DD} , source current (I_S) = -10mA, see Figure 49 |
| On-Resistance Match Between Channels, ΔR_{ON} | 3.2 0.01 | 3.8 | 4.2 | Ω max Ω typ | $V_S = 0$ to V_{DD} , $I_S = -10mA$ |
| On-Resistance Flatness, $R_{FLAT(ON)}$ | 0.1 0.56 1.0 | 0.11 1.0 | 0.3 1.0 | Ω max Ω typ Ω max | $V_S = 0$ to V_{DD} , $I_S = -10mA$ |
| LEAKAGE CURRENTS | | | | | |
| Source Off Leakage, I_S (Off) | ±0.1 ±0.54 | ±2.1 | ±5.7 | nA typ nA max | $V_{DD} = +5.5V$ $V_S = 4.5V/1V$, drain voltage (V_D) = 1V/4.5V, see Figure 50 |
| Drain Off Leakage, I_D (Off) | ±0.1 ±0.54 | ±2.1 | ±5.7 | nA typ nA max | $V_S = 4.5V/1V$, $V_D = 1V/4.5V$, see Figure 50 |
| Channel On Leakage, I_D , I_S (On) | ±0.01 ±0.04 | ±0.06 | ±0.3 | nA typ nA max | $V_S = V_D = 1V$ or $4.5V$, see Figure 51 |
| DIGITAL INPUTS | | | | | |
| Input High Voltage, V_{INH} | | | $0.65 \times V_L$ | V min | $V_L = 1.65V$ to $1.95V$ |
| Input Low Voltage, V_{INL} | | | $0.35 \times V_L$ | V max | $V_L = 1.65V$ to $1.95V$ |
| Input High Voltage, V_{INH} | | | 2.0 | V min | $V_L = 2.7V$ to $3.6V$ |
| Input Low Voltage, V_{INL} | | | 0.8 | V max | $V_L = 2.7V$ to $3.6V$ |
| Input Current, I_{INH} or I_{INL} | 0.02 | | 0.8 | μA typ μA max | $V_{INX} = 0V$ or V_L |
| Digital-Input Capacitance, C_{IN} | 5 | | | pF typ | |
| DYNAMIC CHARACTERISTICS | | | | | |
| On Time, t_{ON} | 21 | | | ns typ | Load resistance (R_L) = 300 Ω , load capacitance (C_L) = 35pF, $V_S = 3V$, $V_L = 1.8V$, see Figure 56 |
| Off Time, t_{OFF} | 26 52 64 | 27 65 | 27 65 | ns max ns typ ns max | $R_L = 300\Omega$, $C_L = 35pF$, $V_S = 3V$, $V_L = 1.8V$, see Figure 56 |
| Charge Injection, Q_{INJ} | 3 | | | pC typ | $V_S = 2.5V$, $R_S = 0\Omega$, $C_L = 1nF$, $V_L = 1.8V$, see Figure 57 |
| Off Isolation | -68 -48 | | | dB typ dB typ | $R_L = 50\Omega$, $C_L = 5pF$, frequency (f) = 1MHz, see Figure 52 |
| Channel-to-Channel Crosstalk | -118 | | | dB typ | $R_L = 50\Omega$, $C_L = 5pF$, f = 10MHz |
| | -103 | | | dB typ | $R_L = 50\Omega$, $C_L = 5pF$, f = 1MHz, see Figure 53 |
| Total Harmonic Distortion, THD | -93 | | | dB typ | $R_L = 50\Omega$, $C_L = 5pF$, f = 10MHz |
| | | | | | $R_L = 10k\Omega$, 3V p-p, f = 20kHz, see Figure 55 |

SPECIFICATIONS

Table 2. +5 V Single-Supply Specifications (Continued)

| Parameter | 25°C | -40°C to +85°C | -40°C to +125°C | Unit | Test Conditions/Comments |
|--|--------|----------------|-----------------|---------|---|
| Total Harmonic Distortion + Noise, THD + N -3dB Bandwidth Insertion Loss Source Off Capacitance, C _S (Off) Drain Off Capacitance, C _D (Off) Drain On Capacitance, C _D (On), Source On Capacitance, C _S (On) | -91 | | | dB typ | R _L = 10kΩ, 3V p-p, f = 100kHz, see Figure 55 |
| | -87 | | | dB typ | R _L = 10kΩ, 3V p-p, f = 200kHz, see Figure 55 |
| | 0.0026 | | | % typ | R _L = 10kΩ, 3V p-p, f = 20Hz to 20kHz, see Figure 55 |
| | 410 | | | MHz typ | R _L = 50Ω, C _L = 5pF, see Figure 54 |
| | -0.1 | | | dB typ | R _L = 50Ω, C _L = 5pF, f = 1MHz, see Figure 54 |
| | 6 | | | pF typ | V _S = 2.5V, f = 1MHz |
| | 6 | | | pF typ | V _S = 2.5V, f = 1MHz |
| | 12 | | | pF typ | V _S = 2.5V, f = 1MHz |
| POWER REQUIREMENTS | | | | | |
| Positive Supply Current, I _{DD} | 1.0 | | | μA typ | V _{DD} = +5.5V, V _{SS} = 0V, V _L = 1.8V Digital inputs = 0V or V _L V |
| Negative Supply Current, I _{SS} | 1.4 | 1.62 | 1.62 | μA max | |
| | 0.64 | | | nA typ | Digital inputs = 0V or V _L V |
| Digital Supply Current, I _L | 1.8 | 11 | 91 | nA max | |
| | 0.05 | | | nA typ | Digital inputs = 0V or V _L V |
| | 1.5 | 3.0 | 20 | nA max | |

+3V SINGLE SUPPLY

V_{DD} = +2.7V to 3.6V, V_{SS} = 0V, GND = 0V, V_L = 1.65V to 3.6V, unless otherwise noted.

Table 3. +3V Single-Supply Specifications

| Parameter | 25°C | -40°C to +85°C | -40°C to +125°C | Unit | Test Conditions/Comments |
|--|------------------------------------|----------------|-----------------------|--------|---|
| ANALOG SWITCH | | | | | |
| ANALOG SWITCH | | | | | V _{DD} = 2.7V, V _{SS} = 0V |
| Analogue Signal Range | V _{SS} to V _{DD} | | | V | |
| On Resistance, R _{ON} | 3.9 | | | Ω typ | V _S = 0 to V _{DD} , I _S = -10mA, see Figure 49 |
| | 6.8 | 7.6 | 8.0 | Ω max | |
| On-Resistance Match Between Channels, ΔR _{ON} | 0.02 | | | Ω typ | V _S = 0 to V _{DD} = -10mA |
| On-Resistance Flatness, R _{FLAT(ON)} | 0.12 | 0.14 | 0.3 | Ω max | |
| | 1.1 | | | Ω typ | V _S = 0 to V _{DD} = -10mA |
| | 2.1 | 2.3 | 2.4 | Ω max | |
| LEAKAGE CURRENTS | | | | | |
| Source Off Leakage, I _S (Off) | ±0.01 | | | nA typ | V _{DD} = 3.6V, V _{SS} = 0V |
| | ±0.032 | ±0.08 | ±0.5 | nA max | V _S = 3.3V/1V, V _D = 1V/3.3V, see Figure 50 |
| Drain Off Leakage, I _D (Off) | ±0.01 | | | nA typ | V _S = 3.3V/1V, V _D = 1V/3.3V, see Figure 50 |
| | ±0.032 | ±0.08 | ±0.5 | nA max | |
| Channel On Leakage, I _D , I _S (On) | ±0.01 | | | nA typ | V _S = V _D = 3.3V or 1V, see Figure 51 |
| | ±0.04 | ±0.05 | ±0.27 | nA max | |
| DIGITAL INPUTS | | | | | |
| Input High Voltage, V _{INH} | | | 0.65 × V _L | V min | V _L = 1.65V to 1.95V |
| Input Low Voltage, V _{INL} | | | 0.35 × V _L | V max | V _L = 1.65V to 1.95V |
| Input High Voltage, V _{INH} | | | 2.0 | V min | V _L = 2.7V to 3.6V |
| Input Low Voltage, V _{INL} | | | 0.8 | V max | V _L = 2.7V to 3.6V |
| Input High Current, I _{INH} or I _{INL} | 0.02 | | 0.8 | μA typ | V _{INX} = 0V or V _L |
| | | | | μA max | |
| Digital-Input Capacitance, C _{IN} | 5 | | | pF typ | |
| DYNAMIC CHARACTERISTICS | | | | | |

SPECIFICATIONS

Table 3. +3V Single-Supply Specifications (Continued)

| Parameter | 25°C | -40°C to +85°C | -40°C to +125°C | Unit | Test Conditions/Comments |
|---|-------|----------------|-----------------|-------------|--|
| On Time, t_{ON} | 23 | | | ns typ | $R_L = 300\Omega$, $C_L = 35pF$, $V_S = 1.5V$, $V_L = 1.8V$, see Figure 56 |
| Off Time, t_{OFF} | 28 | 30 | 30 | ns max | $R_L = 300\Omega$, $C_L = 35pF$, $V_S = 1.5V$, $V_L = 1.8V$, see Figure 56 |
| | 51 | | | ns typ | |
| Charge Injection, Q_{INJ} | 63 | 65 | 65 | ns max | $V_S = 1.5V$, $R_S = 0\Omega$, $C_L = 1nF$, $V_L = 1.8V$, see Figure 57 |
| | 1.5 | | | pC typ | |
| Off Isolation | -68 | | | dB typ | $R_L = 50\Omega$, $C_L = 5pF$, frequency (f) = 1MHz, see Figure 52 |
| | -48 | | | dB typ | $R_L = 50\Omega$, $C_L = 5pF$, f = 10MHz |
| Channel-to-Channel Crosstalk | -118 | | | dB typ | $R_L = 50\Omega$, $C_L = 5pF$, f = 1MHz, see Figure 53 |
| | -103 | | | dB typ | $R_L = 50\Omega$, $C_L = 5pF$, f = 10MHz |
| Total Harmonic Distortion, THD | -87 | | | dB typ | $R_L = 10k\Omega$, 1.5V p-p, f = 20kHz, see Figure 55 |
| | -86 | | | dB typ | $R_L = 10k\Omega$, 1.5V p-p, f = 100kHz, see Figure 55 |
| | -83 | | | dB typ | $R_L = 10k\Omega$, 1.5V p-p, f = 200kHz, see Figure 55 |
| Total Harmonic Distortion + Noise, THD + N | 0.005 | | | % typ | $R_L = 10k\Omega$, 1.5V p-p, f = 20Hz to 20kHz, see Figure 55 |
| -3dB Bandwidth | 535 | | | MHz typ | $R_L = 50\Omega$, $C_L = 5pF$, see Figure 54 |
| Insertion Loss | -0.3 | | | dB typ | $R_L = 50\Omega$, $C_L = 5pF$, f = 1MHz, see Figure 54 |
| Source Off Capacitance, C_S (Off) | 6 | | | pF typ | $V_S = 1.5V$, f = 1MHz |
| Drain Off Capacitance, C_D (Off) | 6 | | | pF typ | $V_S = 1.5V$, f = 1MHz |
| Drain On Capacitance, C_D (On), Source On Capacitance, C_S (On) | 12 | | | pF typ | $V_S = 1.5V$, f = 1MHz |
| POWER REQUIREMENTS | | | | | |
| Positive Supply Current, I_{DD} | 0.17 | | | μA typ | $V_{DD} = 3.6V$, $V_{SS} = 0V$, $V_L = 1.8V$ Digital inputs = 0V or V_L V |
| | 0.26 | 0.31 | 0.31 | μA max | |
| Negative Supply Current, I_{SS} | 0.64 | | | nA typ | Digital inputs = 0V or V_L V |
| | 1.8 | 11 | 91 | nA max | |
| Digital Supply Current, I_L | 0.05 | | | nA typ | Digital inputs = 0V or V_L V |
| | 1.5 | 3.0 | 20 | nA max | |

+1.8V SINGLE SUPPLY

$V_{DD} = 1.71V$ to $1.95V$, $V_{SS} = 0V$, $GND = 0V$, $V_L = 1.65V$ to $3.6V$, unless otherwise noted.

Table 4. +1.8V Single-Supply Specifications

| Parameter | 25°C | -40°C to +85°C | -40°C to +125°C | Unit | Test Conditions/Comments |
|---|----------------------|----------------|-----------------|--------------|---|
| ANALOG SWITCH | | | | | |
| Analog Signal Range | V_{SS} to V_{DD} | | | V | $V_{DD} = 1.71V$, $V_{SS} = 0V$ |
| On Resistance, R_{ON} | 19.2 | | | Ω typ | $V_S = 0$ to V_{DD} , $I_S = -10mA$, see Figure 49 |
| | 63 | 77 | 77 | Ω max | |
| On-Resistance Match Between Channels, ΔR_{ON} | 0.16 | | | Ω typ | $V_S = 0$ to $V_{DD} = -10mA$ |
| | 0.8 | 0.95 | 0.95 | Ω max | |
| On-Resistance Flatness, $R_{FLAT(ON)}$ | 14.5 | | | Ω typ | $V_S = 0$ to $V_{DD} = -10mA$ |
| | 56 | 72 | 72 | Ω max | |
| LEAKAGE CURRENTS | | | | | |
| Source Off Leakage, I_S (Off) | ± 0.01 | | | nA typ | $V_{DD} = 1.95V$, $V_{SS} = 0V$ $V_S = 0.6V/1.65V$, $V_D = 1.65V/0.6V$, see Figure 50 |
| | ± 0.032 | ± 0.08 | ± 0.5 | nA max | |
| Drain Off Leakage, I_D (Off) | ± 0.01 | | | nA typ | $V_S = 1.65V/0.6V$, $V_D = 0.6V/1.65V$, see Figure 50 |
| | ± 0.032 | ± 0.08 | ± 0.5 | nA max | |

SPECIFICATIONS

Table 4. +1.8V Single-Supply Specifications (Continued)

| Parameter | 25°C | -40°C to +85°C | -40°C to +125°C | Unit | Test Conditions/Comments |
|---|----------------|----------------|-------------------|------------------|---|
| Channel On Leakage, I_D , I_S (On) | ±0.01 ±0.04 | ±0.05 | ±0.27 | nA typ nA max | $V_S = V_D = 0.6V$ or $1.65V$, see Figure 51 |
| DIGITAL INPUTS | | | | | |
| Input High Voltage, V_{INH} | | | $0.65 \times V_L$ | V min | $V_L = 1.65V$ to $1.95V$ |
| Input Low Voltage, V_{INL} | | | $0.35 \times V_L$ | V max | $V_L = 1.65V$ to $1.95V$ |
| Input High Voltage, V_{INH} | | | 2.0 | V min | $V_L = 2.7V$ to $3.6V$ |
| Input Low Voltage, V_{INL} | | | 0.8 | V max | $V_L = 2.7V$ to $3.6V$ |
| Input High Current, I_{INH} or I_{INL} | 0.02 | | 0.8 | μA typ μA max | $V_{INx} = 0V$ or V_L |
| Digital-Input Capacitance, C_{IN} | 5 | | | pF typ | |
| DYNAMIC CHARACTERISTICS | | | | | |
| On Time, t_{ON} | 38 | | | ns typ | $R_L = 300\Omega$, $C_L = 35pF$, $V_S = 1V$, $V_L = 1.8V$, see Figure 56 |
| | 47 | 48 | 48 | ns max | |
| Off Time, t_{OFF} | 53 | | | ns typ | $R_L = 300\Omega$, $C_L = 35pF$, $V_S = 1V$, $V_L = 1.8V$, see Figure 56 |
| | 64 | 67 | 67 | ns max | |
| Charge Injection, Q_{INJ} | 0.7 | | | pC typ | $V_S = 0.9V$, $R_S = 0\Omega$, $C_L = 1nF$, $V_L = 1.8V$, see Figure 57 |
| Off Isolation | -68 | | | dB typ | $R_L = 50\Omega$, $C_L = 5pF$, frequency (f) = 1MHz, see Figure 52 |
| | -48 | | | | |
| Channel-to-Channel Crosstalk | -118 | | | dB typ | $R_L = 50\Omega$, $C_L = 5pF$, f = 10MHz |
| | -103 | | | | |
| Total Harmonic Distortion, THD | -66 | | | dB typ | $R_L = 50\Omega$, $C_L = 5pF$, f = 1MHz, see Figure 53 |
| | -62 | | | | |
| | -58 | | | | |
| Total Harmonic Distortion + Noise, THD + N | 0.05 | | | % typ | $R_L = 10k\Omega$, 1.5V p-p, f = 20kHz, see Figure 55 |
| | 450 | | | | |
| -3dB Bandwidth | 450 | | | MHz typ | $R_L = 10k\Omega$, 1.5V p-p, f = 100kHz, see Figure 55 |
| Insertion Loss | -1.1 | | | dB typ | $R_L = 10k\Omega$, 1.5V p-p, f = 200kHz, see Figure 55 |
| Source Off Capacitance, C_S (Off) | 6 | | | | |
| Drain Off Capacitance, C_D (Off) | 6 | | | pF typ | $V_S = 0.9V$, f = 1MHz |
| Drain On Capacitance, C_D (On), Source On Capacitance, C_S (On) | 12 | | | pF typ | $V_S = 0.9V$, f = 1MHz |
| POWER REQUIREMENTS | | | | | |
| Positive Supply Current, I_{DD} | 0.01 | | | nA typ | $V_{DD} = 1.95V$, $V_{SS} = 0V$, $V_L = 1.8V$ Digital inputs = $0V$ or V_L V |
| | 0.26 | 0.31 | 0.31 | μA max | |
| Negative Supply Current, I_{SS} | 0.64 | | | nA typ | Digital inputs = $0V$ or V_L V |
| | 1.8 | 11 | 91 | nA max | |
| Digital Supply Current, I_L | 0.05 | | | nA typ | Digital inputs = $0V$ or V_L V |
| | 1.5 | 3.0 | 20 | nA max | |

±2.5V DUAL SUPPLY

$V_{DD} = +2.5V \pm 10\%$, $V_{SS} = -2.5V \pm 10\%$, GND = 0V, $V_L = 1.65V$ to $1.95V$, unless otherwise noted.

Table 5. ±2.5 V Dual-Supply Specifications

| Parameter | 25°C | -40°C to +85°C | -40°C to +125°C | Unit | Test Conditions/Comments |
|-------------------------|----------------------|----------------|-----------------|-------|--|
| ANALOG SWITCH | | | | | |
| Analog Signal Range | V_{SS} to V_{DD} | | | V | $V_{DD} = +2.25V$, $V_{SS} = -2.25V$ |
| On Resistance, R_{ON} | 2.4 | | | Ω typ | $V_S = V_{SS}$ to V_{DD} , $I_S = -10mA$, see Figure 49 |
| | 3.2 | 3.8 | 4.2 | Ω max | |

SPECIFICATIONS

Table 5. ± 2.5 V Dual-Supply Specifications (Continued)

| Parameter | 25°C | -40°C to +85°C | -40°C to +125°C | Unit | Test Conditions/Comments |
|---|------------|----------------|-------------------|--------------|--|
| On-Resistance Match Between Channels, ΔR_{ON} | 0.01 | | | Ω typ | $V_S = V_{SS}$ to $V_{DD} = -10$ mA |
| On-Resistance Flatness, $R_{FLAT(ON)}$ | 0.1 | 0.11 | 0.3 | Ω max | $V_S = V_{SS}$ to $V_{DD} = -10$ mA |
| | 0.56 | | | Ω typ | |
| | 1.0 | 1.0 | 1.0 | Ω max | |
| LEAKAGE CURRENTS | | | | | |
| Source Off Leakage, I_S (Off) | ± 0.3 | | | nA typ | $V_{DD} = +2.75$ V, $V_{SS} = -2.75$ V |
| | ± 0.54 | ± 2.1 | ± 5.7 | nA max | $V_S = +2.25$ V/ -2.25 V, $V_D = -2.25$ V/ $+2.25$ V, see Figure 50 |
| Drain Off Leakage, I_D (Off) | ± 0.3 | | | nA typ | $V_S = +2.25$ V/ -2.25 V, $V_D = -2.25$ V/ $+2.25$ V, see Figure 50 |
| | ± 0.54 | ± 2.1 | ± 5.7 | nA max | |
| Channel On Leakage, I_D , I_S (On) | ± 0.01 | | | nA typ | $V_S = V_D = -2.25$ V or $+1.25$ V, see Figure 51 |
| | ± 0.04 | ± 0.06 | ± 0.3 | nA max | |
| DIGITAL INPUTS | | | | | |
| Input High Voltage, V_{INH} | | | $0.65 \times V_L$ | V min | $V_L = 1.65$ V to 1.95 V |
| Input Low Voltage, V_{INL} | | | $0.35 \times V_L$ | V max | $V_L = 1.65$ V to 1.95 V |
| Input High Current, I_{INH} or I_{INL} | 0.02 | | 0.8 | μ A typ | $V_{INX} = 0$ V or V_L |
| | | | | μ A max | |
| Digital-Input Capacitance, C_{IN} | 5 | | | pF typ | |
| DYNAMIC CHARACTERISTICS | | | | | |
| On Time, t_{ON} | 22 | | | ns typ | $R_L = 300\Omega$, $C_L = 35$ pF, $V_S = 1.5$ V, $V_L = 1.8$ V, see Figure 56 |
| | 26 | 27 | 27 | ns max | |
| Off Time, t_{OFF} | 51 | | | ns typ | $R_L = 300\Omega$, $C_L = 35$ pF, $V_S = 1.5$ V, $V_L = 1.8$ V, see Figure 56 |
| | 63 | 64 | 64 | ns max | |
| Charge Injection, Q_{INJ} | 3 | | | pC typ | $V_S = 0$ V, $R_S = 0\Omega$, $C_L = 1$ nF, $V_L = 1.8$ V, see Figure 57 |
| Off Isolation | -68 | | | dB typ | $R_L = 50\Omega$, $C_L = 5$ pF, frequency (f) = 1MHz, see Figure 52 |
| Channel-to-Channel Crosstalk | -48 | | | | $R_L = 50\Omega$, $C_L = 5$ pF, f = 10MHz |
| | -118 | | | dB typ | $R_L = 50\Omega$, $C_L = 5$ pF, f = 1MHz, see Figure 53 |
| Total Harmonic Distortion, THD | -103 | | | dB typ | $R_L = 50\Omega$, $C_L = 5$ pF, f = 10MHz |
| | -99 | | | dB typ | $R_L = 10k\Omega$, 3V p-p, f = 20kHz, see Figure 55 |
| | -95 | | | dB typ | $R_L = 10k\Omega$, 3V p-p, f = 100kHz, see Figure 55 |
| | -90 | | | dB typ | $R_L = 10k\Omega$, 3V p-p, f = 200kHz, see Figure 55 |
| Total Harmonic Distortion + Noise, THD + N | 0.002 | | | % typ | $R_L = 10k\Omega$, 3V p-p, f = 20Hz to 20kHz, see Figure 55 |
| -3dB Bandwidth | 405 | | | MHz typ | $R_L = 50\Omega$, $C_L = 5$ pF, see Figure 54 |
| Insertion Loss | -0.1 | | | dB typ | $R_L = 50\Omega$, $C_L = 5$ pF, f = 1MHz, see Figure 54 |
| Source Off Capacitance, C_S (Off) | 6 | | | pF typ | $V_S = 0$ V, f = 1MHz |
| Source Off Capacitance, C_D (Off) | 6 | | | pF typ | $V_S = 0$ V, f = 1MHz |
| Drain On Capacitance, C_D (On), Source On Capacitance, C_S (On) | 12 | | | pF typ | $V_S = 0$ V, f = 1MHz |
| POWER REQUIREMENTS | | | | | |
| Positive Supply Current, I_{DD} | 0.013 | | | μ A typ | $V_{DD} = +2.75$ V, $V_{SS} = -2.75$ V, $V_L = 1.8$ V |
| | 0.26 | 0.31 | 0.31 | μ A max | Digital inputs = 0V or V_L |
| Negative Supply Current, I_{SS} | 0.06 | | | nA typ | Digital inputs = 0V or V_L |
| | 1.9 | 13 | 105 | nA max | |
| Digital Supply Current, I_L | 0.05 | | | μ A typ | Digital inputs = 0V or V_L |
| | 1.5 | 3.0 | 20 | nA max | |

SPECIFICATIONS

CONTINUOUS CURRENT PER CHANNEL, SX OR DX

Table 6. One Channel On

| Parameter | 25°C | 85°C | 125°C | Unit |
|--|------|------|-------|------------|
| CONTINUOUS CURRENT, Sx OR Dx ¹ ($\theta_{JA} = 150\text{ }^{\circ}\text{C/W.}$) | | | | |
| $V_{DD} = +5\text{ V}, V_{SS} = 0\text{ V}$ | 254 | 111 | 44 | mA maximum |
| $V_{DD} = +3\text{ V}, V_{SS} = 0\text{ V}$ | 196 | 97 | 43 | mA maximum |
| $V_{DD} = 1.8\text{ V}, V_{SS} = 0\text{ V}$ | 123 | 73 | 39 | mA maximum |
| $V_{DD} = 2.5\text{ V}, V_{SS} = -2.5\text{ V}$ | 239 | 108 | 44 | mA maximum |

¹ Sx refer to S1 to S4 pins, and Dx refers to the D1 to D4 pins.

Table 7. Four Channels On

| Parameter | 25°C | 85°C | 125°C | Unit |
|--|------|------|-------|------------|
| CONTINUOUS CURRENT, Sx OR Dx ¹ ($\theta_{JA} = 150\text{ }^{\circ}\text{C/W.}$) | | | | |
| $V_{DD} = +5\text{ V}, V_{SS} = 0\text{ V}$ | 146 | 81 | 40 | mA maximum |
| $V_{DD} = +3\text{ V}, V_{SS} = 0\text{ V}$ | 112 | 68 | 37 | mA maximum |
| $V_{DD} = 1.8\text{ V}, V_{SS} = 0\text{ V}$ | 70 | 47 | 31 | mA maximum |
| $V_{DD} = 2.5\text{ V}, V_{SS} = -2.5\text{ V}$ | 137 | 78 | 40 | mA maximum |

¹ Sx refer to S1 to S4 pins, and Dx refers to the D1 to D4 pins.

ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 8. Absolute Maximum Ratings

| Parameter | Rating |
|--|--|
| V_{DD} to V_{SS} | 6V |
| V_{DD} to GND | -0.3V to +6V |
| V_{SS} to GND | +0.3V to -6V |
| V_L to GND | -0.3V to +6V |
| V_L to V_{SS} | 6V |
| Analog Inputs ¹ | $V_{SS} - 0.3\text{ V}$ to $V_{DD} + 0.3\text{ V}$ or 30mA, whichever occurs first |
| Digital Inputs ² | GND - 0.3V to 6V or 30mA, whichever occurs first |
| Peak Current, Sx or Dx Pins ³ | 682mA (pulsed at 1ms, 10% duty-cycle maximum) |
| Continuous Current, Sx or Dx Pins ³ | Data Table 6 and Table 7 + 15% |
| Temperature | |
| Operating Range | -40°C to +125°C |
| Storage Range | -65°C to +150°C |
| Junction | 150°C |
| Reflow Soldering Peak, Pb-Free | As per JEDEC J-STD-020 |

¹ Overvoltages at the INx, Sx, and Dx pins are clamped by internal diodes. Current must be limited to the maximum ratings given.

² Overvoltages at the INx digital-input pins are clamped by internal diodes.

³ Sx refers to the S1 to S4 pins, and Dx refers to the D1 to D4 pins.

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

THERMAL RESISTANCE

Thermal performance is directly linked to printed circuit board (PCB) design and operating environment. Careful attention to PCB thermal design is required.

θ_{JA} is the natural convection junction-to-ambient thermal resistance measured in a one cubic foot sealed enclosure, and θ_{JCB} is the junction to the bottom of case thermal resistance.

Table 9. Thermal Resistance

| Package Type | θ_{JA} | θ_{JCB} | Unit |
|-----------------------|---------------|----------------|------|
| CC-16-10 ¹ | 150 | 74.8 | °C/W |

¹ Thermal impedance simulated values are based on JEDEC 2S2P thermal test board without thermal vias. See JEDEC JESD-51.

ELECTROSTATIC DISCHARGE (ESD) RATINGS

The following ESD information is provided for handling of ESD-sensitive devices in an ESD-protected area only.

Human body model (HBM) per ANSI/ESDA/JEDEC JS-001.

Field induced charged-device model (FICDM) per ANSI/ESDA/JEDEC JS-002.

ESD Ratings for the ADG1712

Table 10. ADG1712, 16-Lead LGA

| ESD Model | Withstand Threshold (V) | Class |
|------------------|-------------------------|-------|
| HBM ¹ | ±4000 | 3A |
| FICDM | ±1250 | C3 |


¹ For the input and output port to the supplies, the input and output port to the input and output port, and all other inputs.

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS



NOTES
1. TIE THE EXPOSED PAD TO THE SUBSTRATE, V_{SS}.

Figure 2. Pin Configuration

Table 11. Pin Function Descriptions

| Pin No. | Mnemonic | Description |
|---------|-----------------|--|
| 1 | S1 | Source Terminal 1. This pin can be an input or output. |
| 2 | IN1 | Digital Control Input. Logic state controls the status of the switch S1 to D1. |
| 3 | AGND | Ground (0V) Reference. |
| 4 | IN4 | Digital Control Input. Logic state controls the status of the switch S4 to D4. |
| 5 | S4 | Source Terminal 4. This pin can be an input or output. |
| 6 | D4 | Drain Terminal 4. This pin can be an input or output. |
| 7 | V _{SS} | Most Negative Power-Supply Potential. Decouple the V _{SS} pin using a 0.1µF capacitor to GND. |
| 8 | D3 | Drain Terminal 3. This pin can be an input or output. |
| 9 | S3 | Source Terminal 3. This pin can be an input or output. |
| 10 | IN3 | Digital Control Input. Logic state controls the status of the switch S3 to D3. |
| 11 | V _L | Digital Logic Power Supply. |
| 12 | IN2 | Digital Control Input. Logic state controls the status of the switch S2 to D2. |
| 13 | S2 | Source Terminal 2. This pin can be an input or output. |
| 14 | D2 | Drain Terminal 2. This pin can be an input or output. |
| 15 | V _{DD} | Most Positive Power-Supply Potential. Decouple the V _{DD} pin using a 0.1µF capacitor to GND. |
| 16 | D1 | Drain Terminal 1. This pin can be an input or output. |
| EP | Exposed Pad | The exposed pad is connected internally. For increased reliability of the solder joints and maximum thermal capability, it is recommended that the pad be soldered to the substrate, V _{SS} . |

Table 12. ADG1712 Truth Table

| INx | Switch Condition |
|-----|------------------|
| 0 | Off |
| 1 | On |

TYPICAL PERFORMANCE CHARACTERISTICS

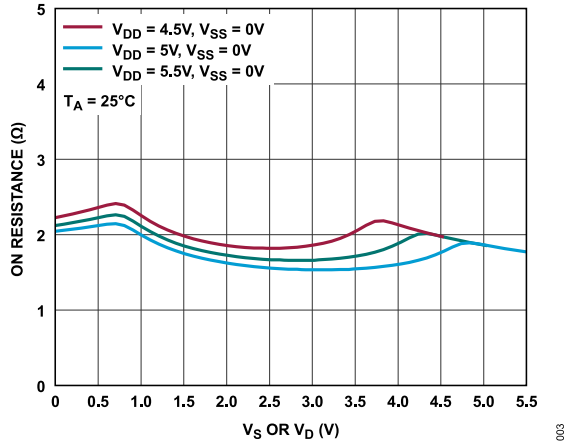


Figure 3. On Resistance vs. V_S or V_D , 5V Single Supply

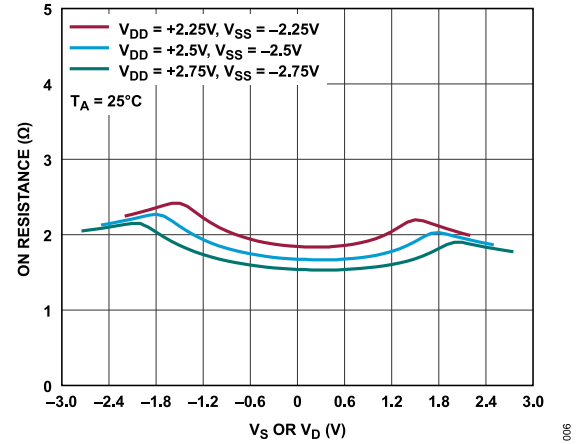


Figure 6. On Resistance vs. V_S or V_D , 2.5V Dual Supply

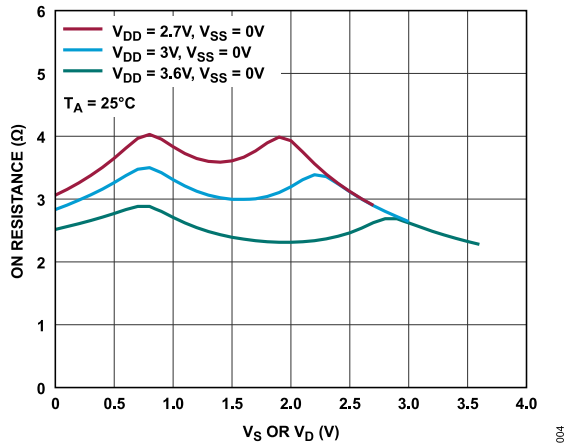


Figure 4. On Resistance vs. V_S or V_D , 3V Single Supply

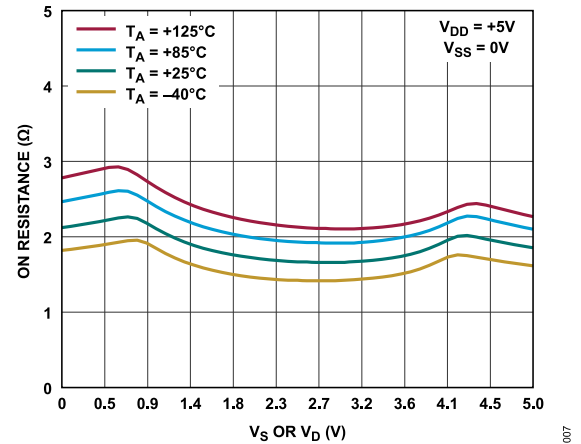


Figure 7. On Resistance vs. V_S or V_D for Different Temperatures, +5V Single Supply

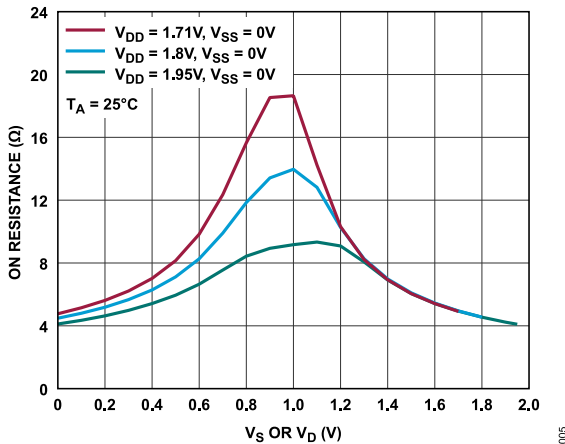


Figure 5. On Resistance vs. V_S or V_D , 1.8V Single Supply

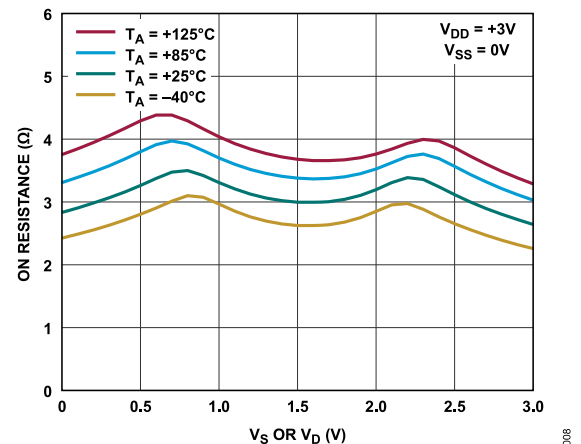


Figure 8. On Resistance vs. V_S or V_D for Different Temperatures, +3V Single Supply

TYPICAL PERFORMANCE CHARACTERISTICS

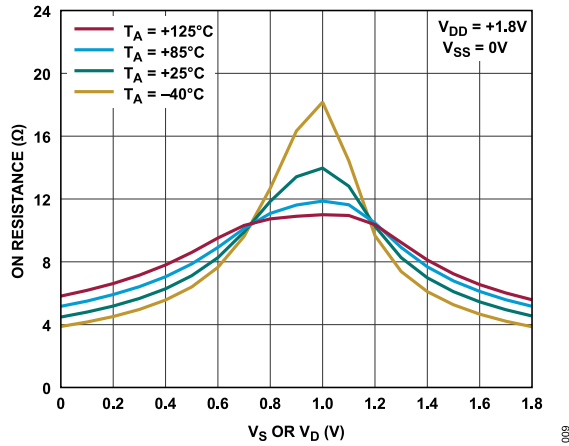


Figure 9. On Resistance vs. V_S or V_D for Different Temperatures, +1.8V Single Supply

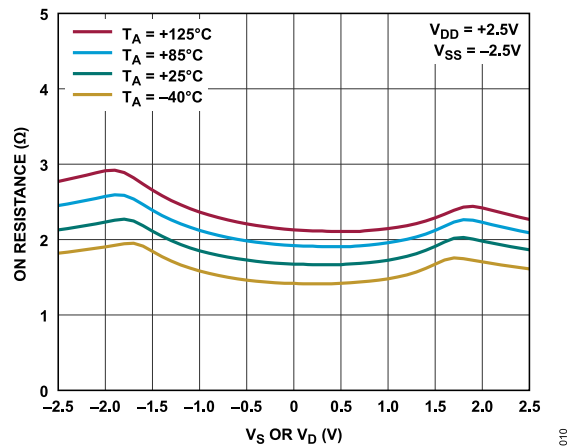


Figure 10. On Resistance vs. V_S or V_D for Different Temperatures, $\pm 2.5V$ Dual Supply

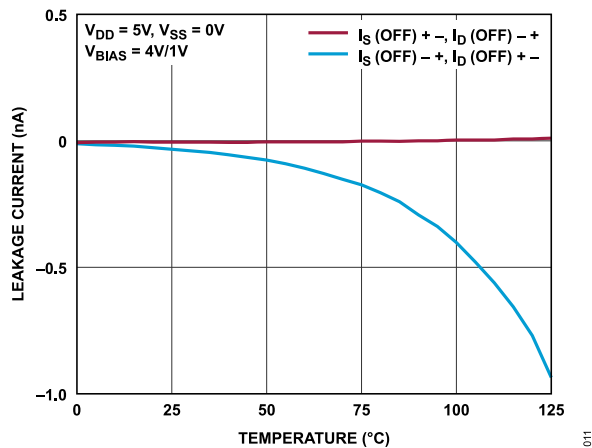


Figure 11. Off Leakage Currents vs. Temperature, +5V Single Supply

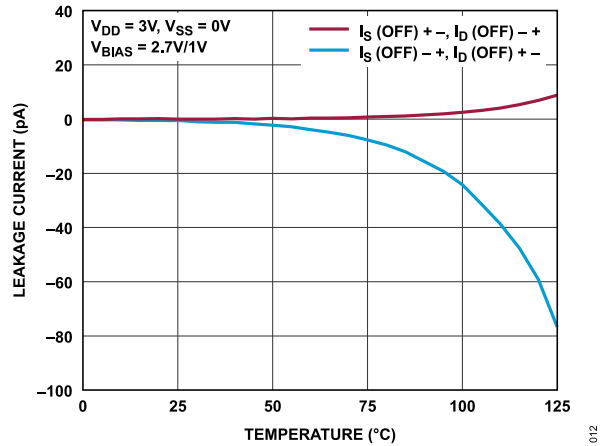


Figure 12. Off Leakage Currents vs. Temperature, +3V Single Supply

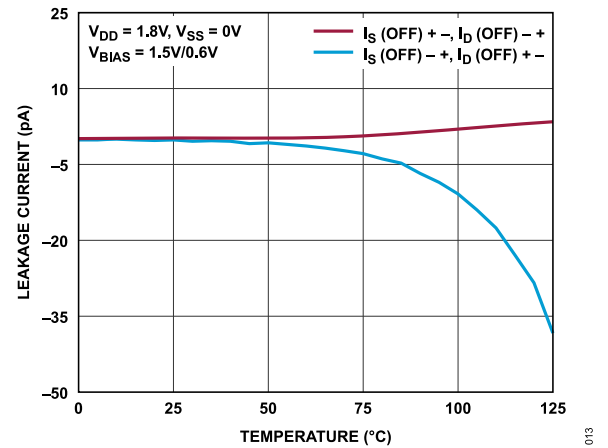


Figure 13. Off Leakage Currents vs. Temperature, +1.8V Single Supply

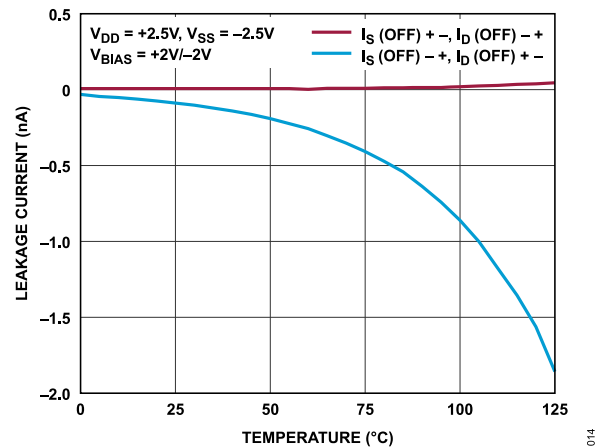


Figure 14. Off Leakage Currents vs. Temperature, $\pm 2.5V$ Dual Supply

TYPICAL PERFORMANCE CHARACTERISTICS

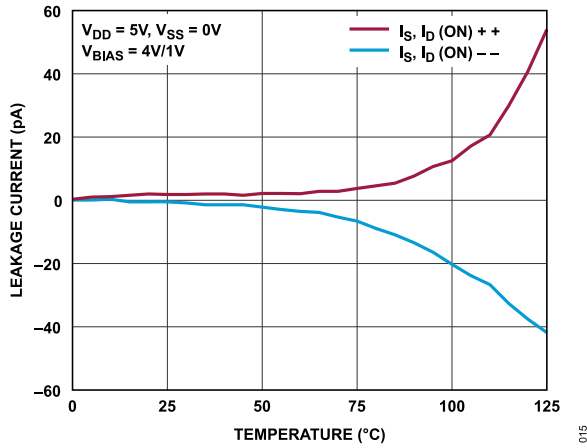


Figure 15. On Leakage Currents vs. Temperature, +5V Single Supply

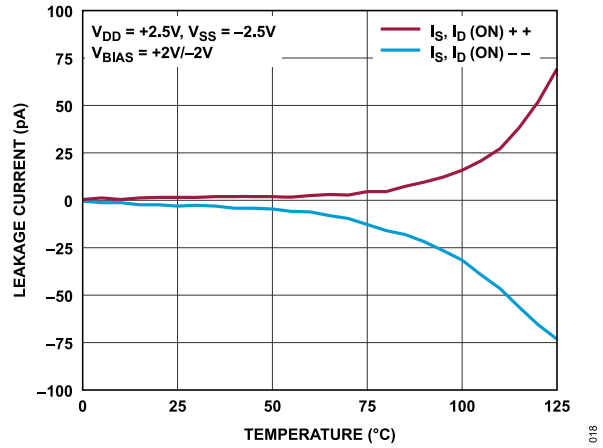


Figure 18. On Leakage Currents vs. Temperature, ±2.5V Dual Supply

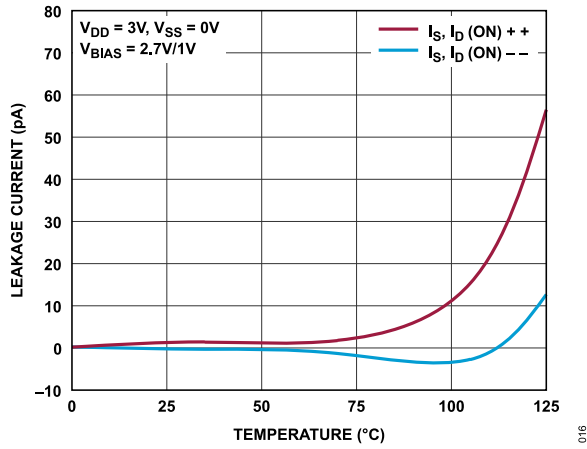


Figure 16. On Leakage Currents vs. Temperature, +3V Single Supply

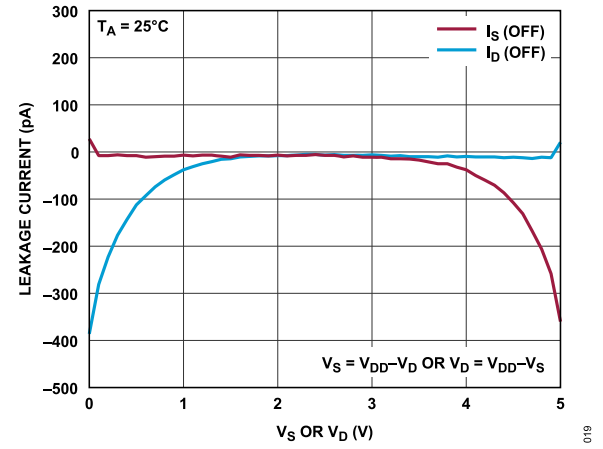


Figure 19. Off Leakage Currents as a Function of V_S , (V_D), 25°C, 5V Single Supply

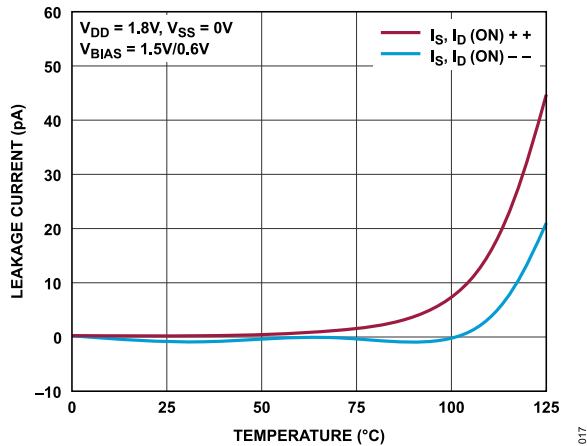


Figure 17. On Leakage Currents vs. Temperature, +1.8V Single Supply

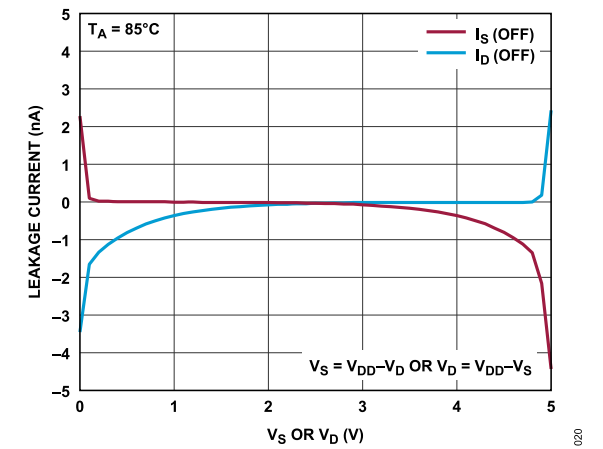


Figure 20. Off Leakage Currents as a Function of V_S , (V_D), 85°C, 5V Single Supply

TYPICAL PERFORMANCE CHARACTERISTICS

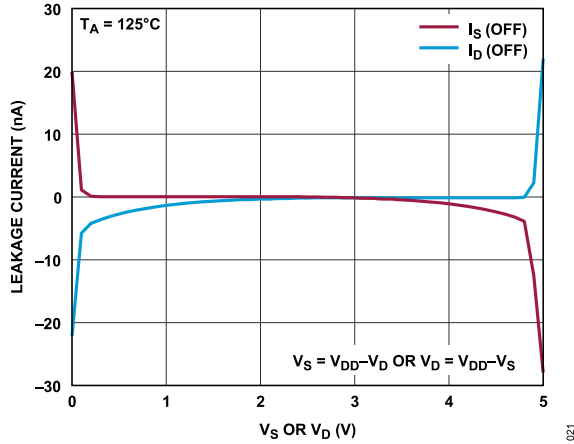


Figure 21. Off Leakage Currents as a Function of V_S , (V_D), 125°C, 5V Single Supply

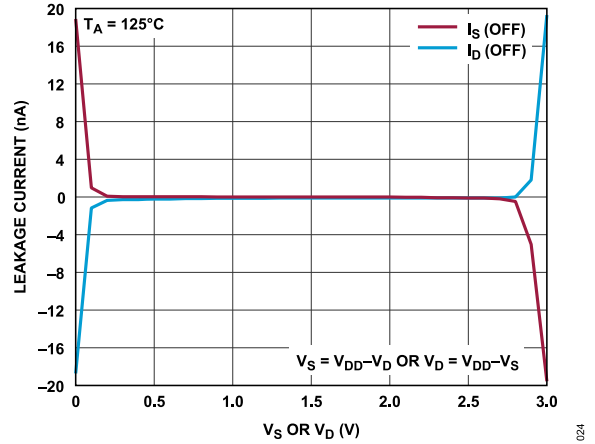


Figure 24. Off Leakage Currents as a Function of V_S , (V_D), 125°C, 3V Single Supply

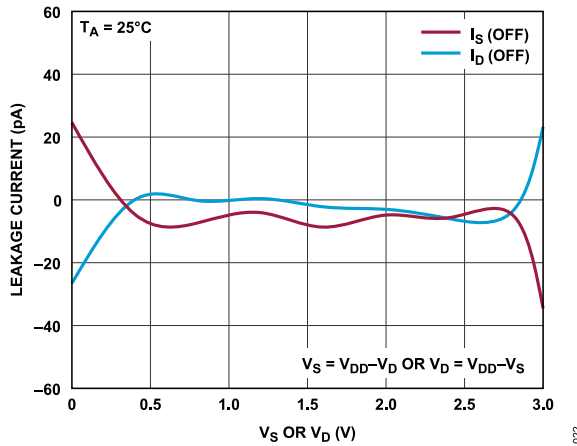


Figure 22. Off Leakage Currents as a Function of V_S , (V_D), 25°C, 3V Single Supply

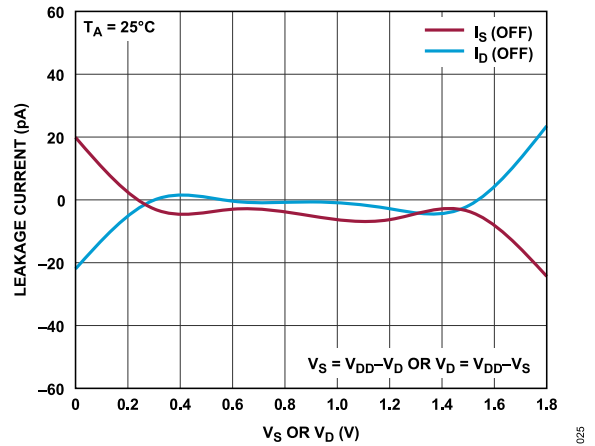


Figure 25. Off Leakage Currents as a Function of V_S , (V_D), 25°C, 1.8V Single Supply

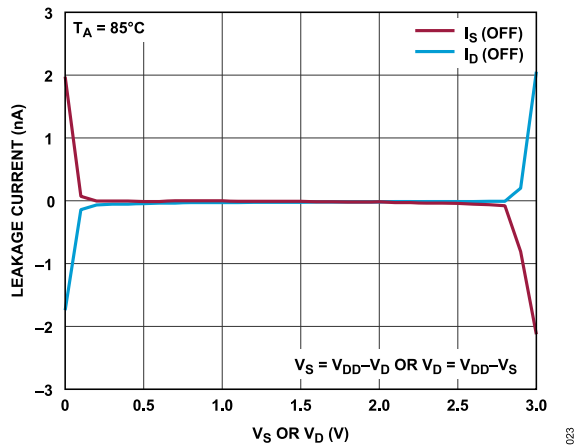


Figure 23. Off Leakage Currents as a Function of V_S , (V_D), 85°C, 3V Single Supply

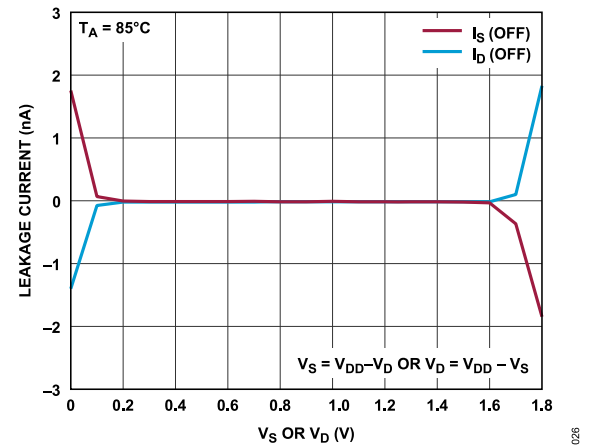


Figure 26. Off Leakage Currents as a Function of V_S , (V_D), 85°C, 1.8V Single Supply

TYPICAL PERFORMANCE CHARACTERISTICS

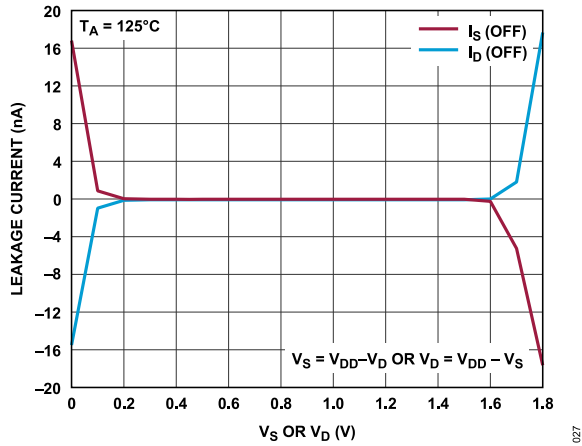


Figure 27. Off Leakage Currents as a Function of V_S , (V_D), 125°C, 1.8V Single Supply

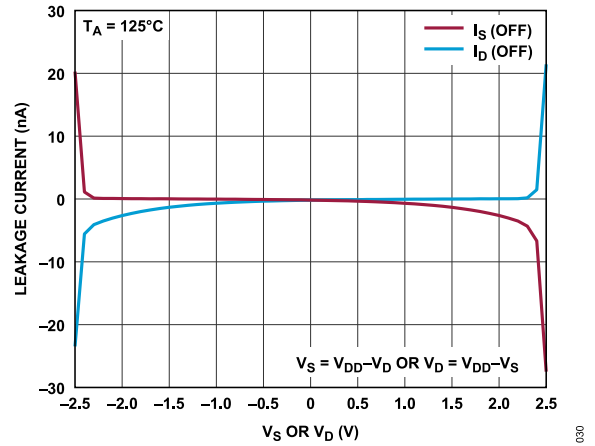


Figure 30. Off Leakage Currents as a Function of V_S , (V_D), 125°C, 2.5V Dual Supply

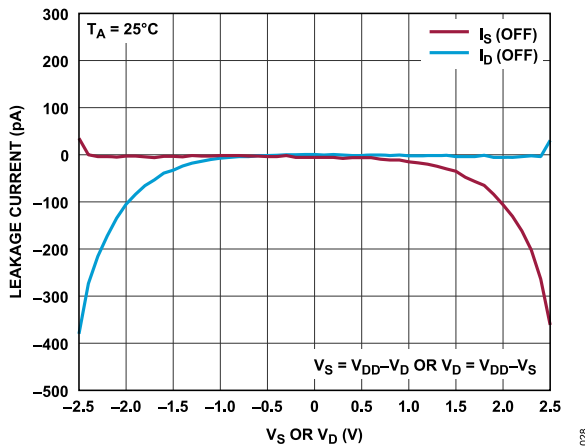


Figure 28. Off Leakage Currents as a Function of V_S , (V_D), 25°C, 2.5V Dual Supply

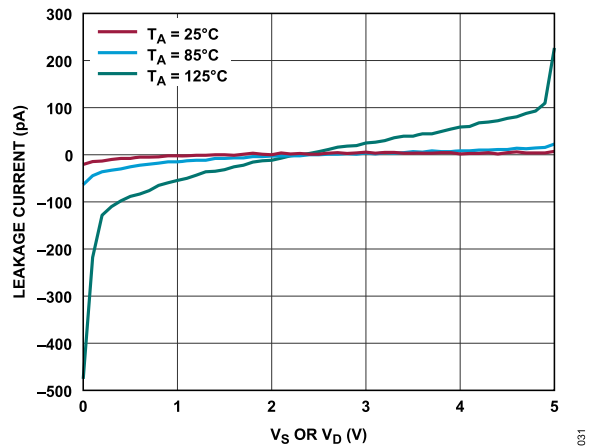


Figure 31. On Leakage Currents as a Function of V_S , (V_D), 5V Single Supply

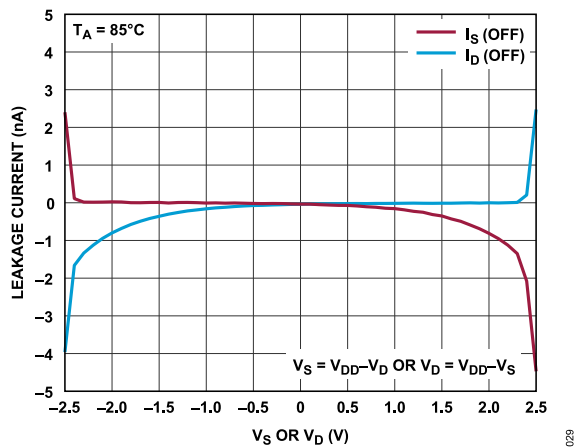


Figure 29. Off Leakage Currents as a Function of V_S , (V_D), 85°C, 2.5V Dual Supply

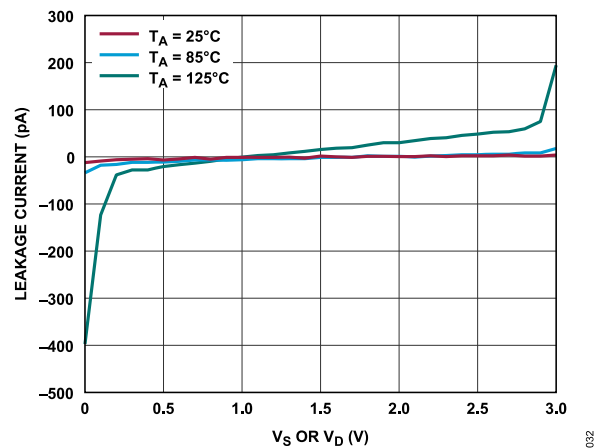


Figure 32. On Leakage Currents as a Function of V_S , (V_D), 3V Single Supply

TYPICAL PERFORMANCE CHARACTERISTICS

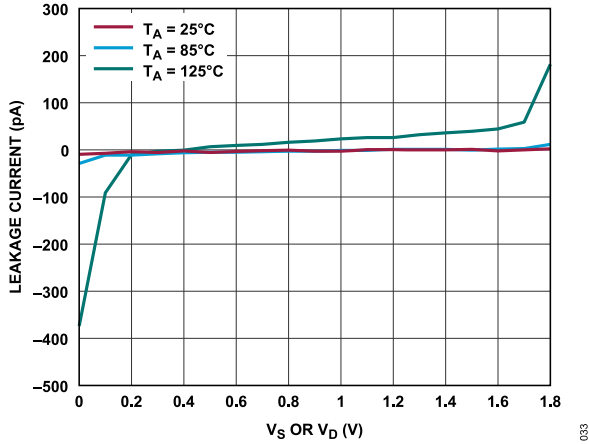


Figure 33. On Leakage Currents as a Function of V_S , (V_D), 1.8V Single Supply

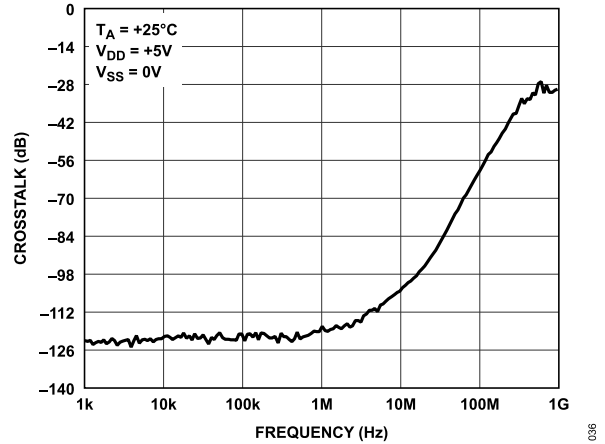


Figure 36. Crosstalk vs. Frequency, 5V Single Supply

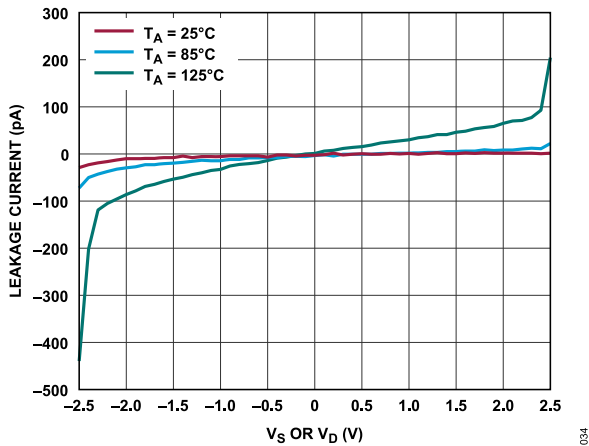


Figure 34. On Leakage Currents as a Function of V_S , (V_D), 2.5V Dual Supply

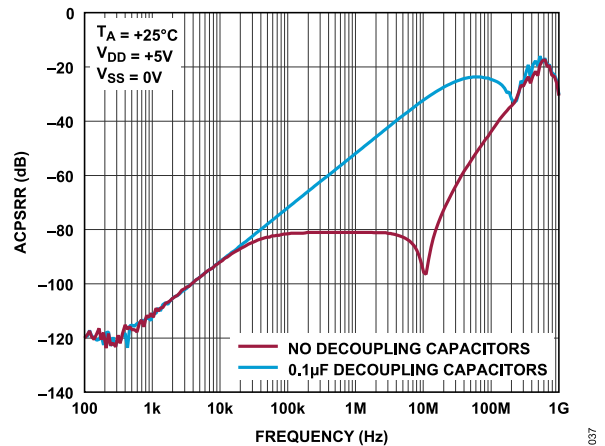


Figure 37. AC PSRR vs. Frequency, 5V Single Supply

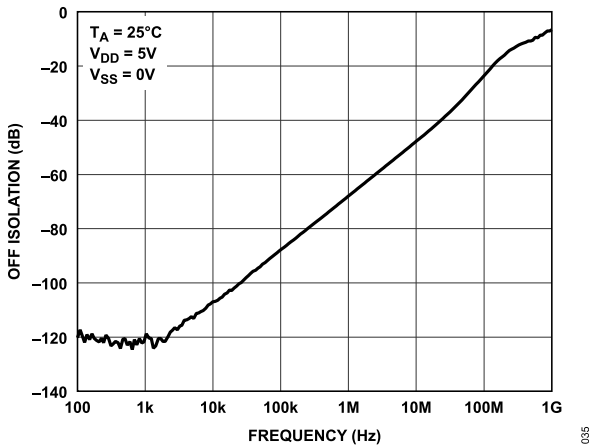


Figure 35. Off Isolation vs. Frequency, 5V Single Supply

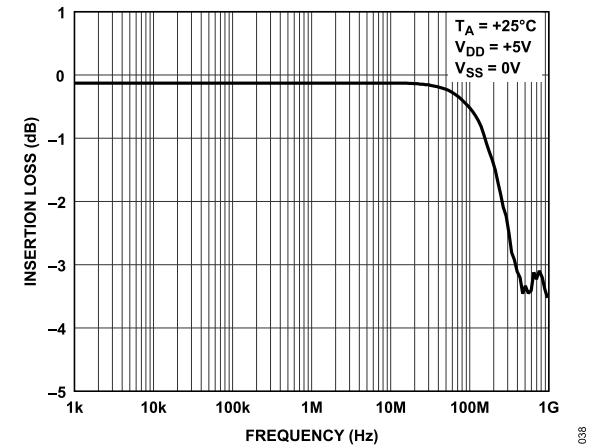


Figure 38. Insertion Loss vs. Frequency, 5V Single Supply

TYPICAL PERFORMANCE CHARACTERISTICS

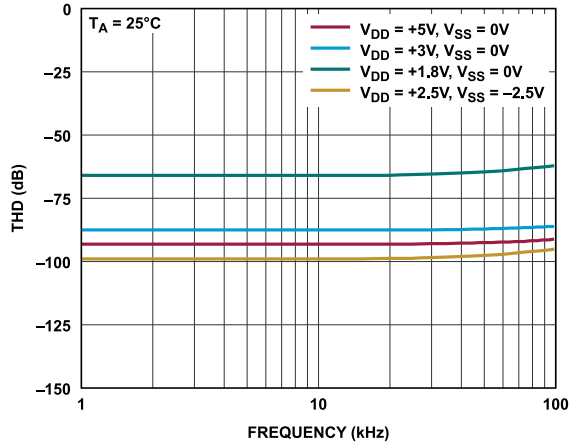


Figure 39. THD vs. Frequency



Figure 40. THD + N vs. Frequency

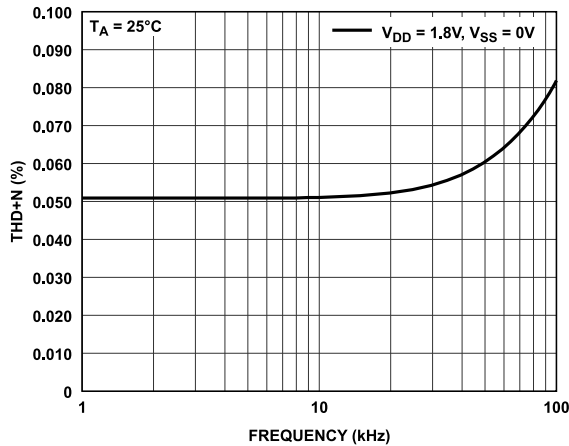


Figure 41. THD + N vs. Frequency, 1.8V Single Supply

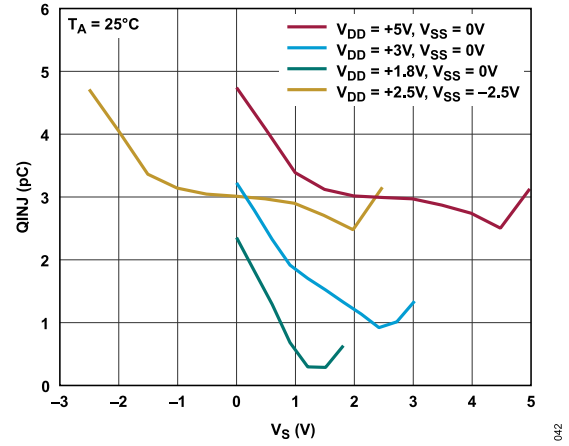


Figure 42. Charge Injection (QINJ) vs. VS

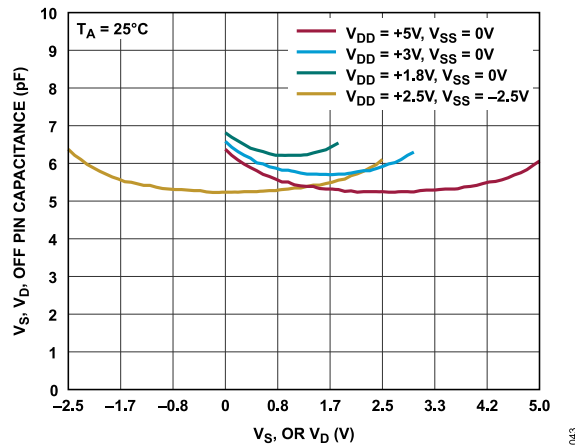


Figure 43. Off Pin Capacitance vs. VS

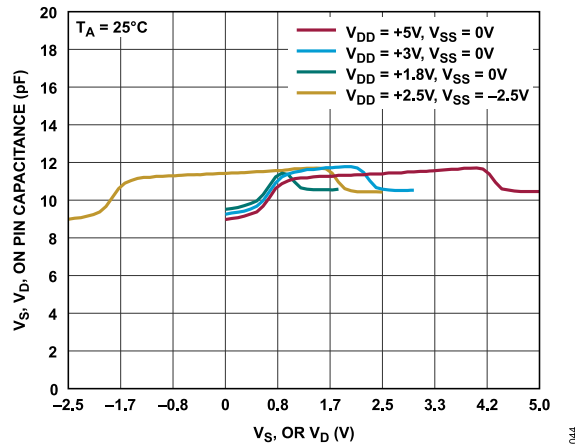


Figure 44. On Pin Capacitance vs. VS

TYPICAL PERFORMANCE CHARACTERISTICS

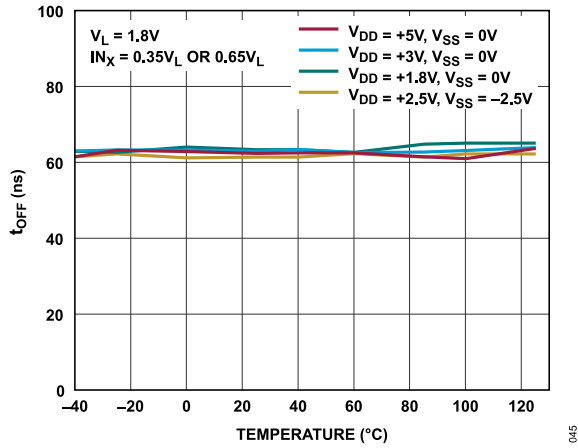


Figure 45. T_{OFF} Times vs. Temperature

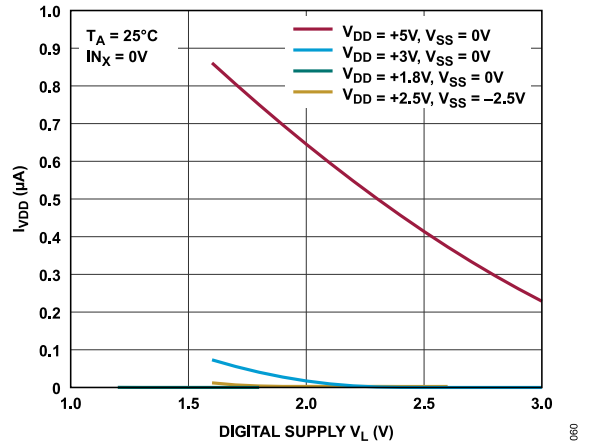


Figure 48. Positive Supply Current (I_{VDD}) vs. Digital Supply (V_L)

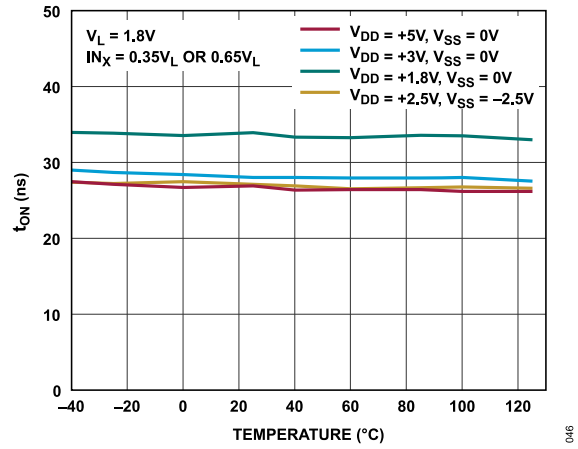


Figure 46. T_{ON} Times vs. Temperature

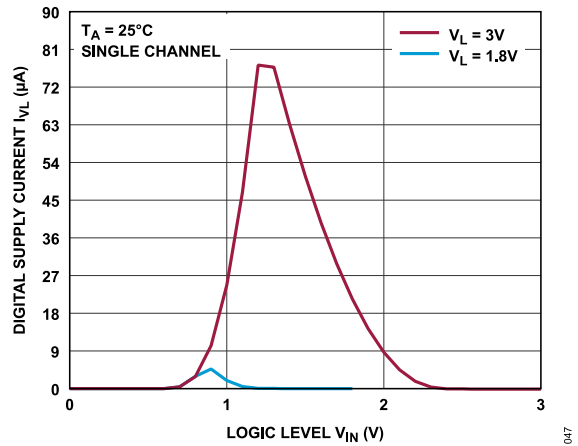


Figure 47. Digital Supply Current vs. Logic Level

TEST CIRCUITS




Figure 49. On Resistance




Figure 50. Off Leakage




Figure 51. On Leakage

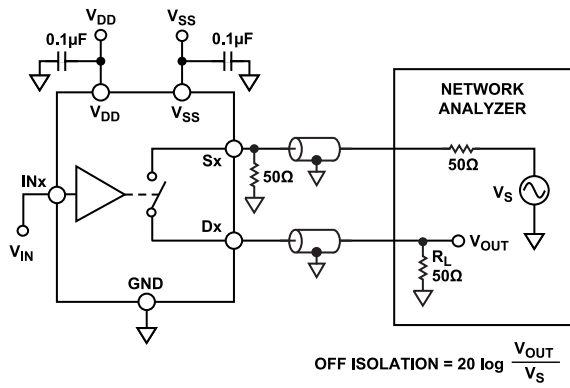


Figure 52. Off Isolation

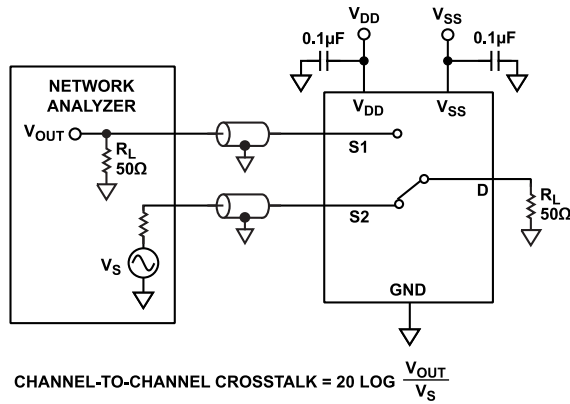


Figure 53. Channel-to-Channel Crosstalk

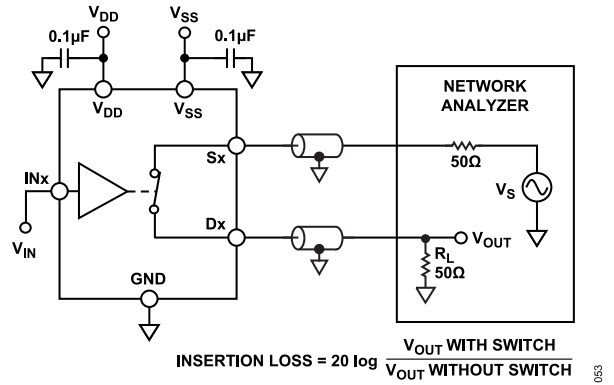


Figure 54. Bandwidth

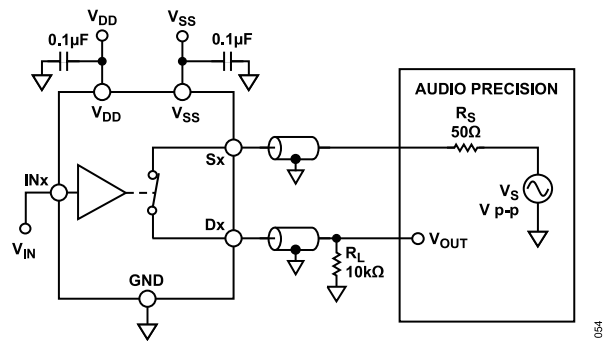


Figure 55. THD + Noise

TEST CIRCUITS

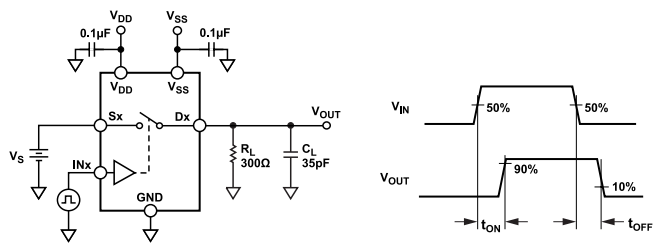


Figure 56. Switching Times

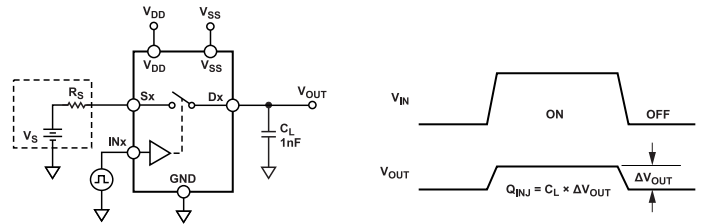


Figure 57. Charge Injection

TERMINOLOGY**I_{DD}**

The positive supply current.

I_{SS}

The negative supply current.

I_{VL}

The digital supply current.

V_D and V_S

The analog voltage on Terminal D and Terminal S.

R_{ON}

The ohmic resistance between Terminal D and Terminal S.

R_{FLAT(ON)}

The difference between the maximum and minimum value of on resistance measured over the specified analog signal range.

ΔR_{ON}

The difference between the R_{ON} of any two channels.

I_S Off

The source leakage current with the switch off.

I_D Off

The drain leakage current with the switch off.

I_D I_S On

The channel leakage current with the switch on.

V_D AND V_S

Analog voltages on Terminal D and Terminal S.

V_{INL}

The maximum input voltage for Logic 0.

V_{INH}

The minimum input voltage for Logic 1.

I_{INL}, I_{INH}

The input current of the digital input when high or when low.

C_S (Off) and C_D (Off)

The off switch source and drain capacitance for the off condition, which is measured with reference to ground.

C_D (On) and C_S (On)

The on switch drain and source capacitance for the on condition, which is measured with reference to ground.

C_{IN}

The digital input capacitance.

t_{ON}

The delay between the 50% and 90% points of the digital control input and the output switching on.

t_{OFF}

The delay between the 50% and 10% points of the digital control input and the output switching off.

Charge Injection

A measure of the glitch impulse transferred from the digital input to the analog output during switching.

Off Isolation

A measure of unwanted signal coupling through an off switch.

Channel-to-Channel Crosstalk

A measure of unwanted signal that is coupled through from one channel to another as a result of parasitic capacitance.

Bandwidth

The frequency at which the output is attenuated by 3 dB.

Insertion Loss

The loss due to the on resistance of the switch.

TOTAL HARMONIC DISTORTION (THD)

THD is the ratio of the sum of the powers of all harmonic components to the power of the fundamental frequency.

Total Harmonic Distortion + Noise (THD + N)

The ratio of the harmonic amplitude plus noise of the signal to the fundamental.

AC Power Supply Rejection Ratio (AC PSRR)

A measure of the ability of the device to avoid coupling noise and spurious signals that appear on the supply voltage pin to the output of the switch. The DC voltage on the device is modulated by a sine wave of 0.62V p-p. The ratio of the amplitude of the signal on the output to the amplitude of the modulation is the AC PSRR.

THEORY OF OPERATION

SWITCH ARCHITECTURE

The ADG1712 is a set of low voltage CMOS quad SPST switches that are compatible with a wide range of power supply voltages.

The ADG1712 is designed for precision applications where size and channel density are a priority. The ADG1712 gives an optimal balance of low on resistance (2.4Ω typical), and low leakage currents (0.01nA , typical) in a very small $2\text{mm} \times 2\text{mm}$ LGA package, to suit a very broad range of user applications.

3V AND 1.8V JEDEC COMPLIANCE

An external V_L supply provides flexibility for lower logic levels. The following V_L conditions must be satisfied for the switch to operate in either 3V or 1.8V logic operation:

- ▶ $V_L = 2.7\text{V}$ to 3.6V for 3V logic
- ▶ $V_L = 1.65\text{V}$ to 1.95V for 1.8V logic

V_L FLEXIBILITY

The absolute maximum voltage rating for the digital control input pins (INx) is -0.3V to 6V . The digital control inputs are not limited to the external V_L supply or V_{DD} . This allows the digital input voltages to be present without the V_L supply and gives the ability to use the V_L pin as an enable pin for all four switch channels in the ADG1712. Regardless of the input voltage on the digital input pins, if $V_L = 0\text{V}$, all of the switch channels will be off. This flexibility also allows V_L voltages higher than V_{DD} if required, just ensure not to violate the 6V maximum voltage rating between V_L and V_{SS} .

APPLICATIONS INFORMATION

DATA ACQUISITION SYSTEM CALIBRATION

ADG1712 can be used in a broad variety of applications to add flexibility and configurations to systems that require low voltage switching of precision analog signals, digital signals, and low voltage power supplies. Figure 58 shows a typical application where the ADG1712 is used in a differential analog input to a data acquisition system. In this typical system, to preform a system calibration, it is required to short the differential inputs together. The small package size of the ADG1712 provides advantages in applications that are area constrained, and the flexible supply voltage allows the ADG1712 to adapt to the existing system power supply ranges.

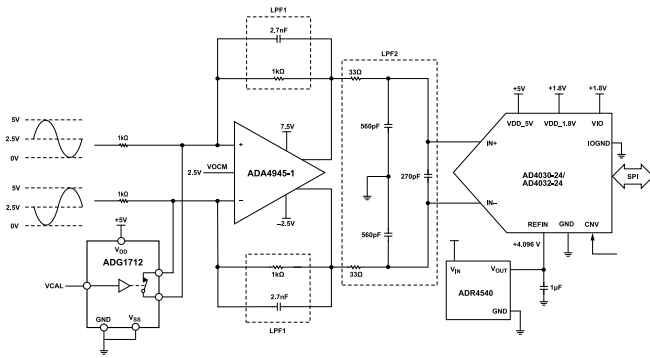


Figure 58. Typical Application

OUTPUT LOAD FOR REDUCED OVERSHOOT

The each channel of the ADG1712 can toggle at a very high speed. Typically 21ns for T_{ON} and 52ns for T_{OFF} . These very high switching speeds are an advantage in systems such as high speed digital circuits or communications systems. However, depending on the load at the output of the switch circuit, the very fast switching action can cause voltage overshoots to occur. Depending on the switch supply voltage and the level of the signal voltage through the switch, an overshoot can cause the voltage at the output of the switch to go beyond the supply voltage and exceed the absolute ratings for the ADG1712. Adding extra load capacitance is a practical solution to mitigate these overshoots, ensuring the output voltage remains within safe limits.

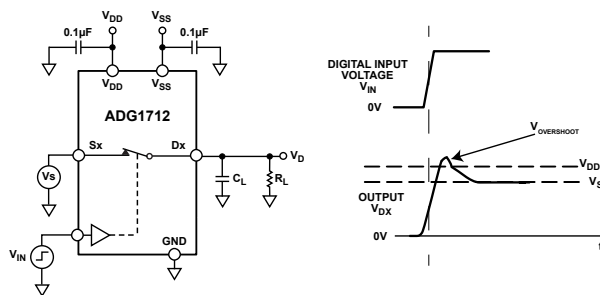


Figure 59. ADG1712 Overshoot

POWER-SUPPLY RAILS

To guarantee correct operation of the ADG1712, 0.1μF decoupling capacitors are required on the V_{DD} , V_{SS} , and V_L supply pins.

The ADG1712 can operate with single supplies from +1.08V to +5.5V and dual supplies between $\pm 1.08V$ to $\pm 2.75V$. The supplies on V_{DD} and V_{SS} do not have to be asymmetrical. However, the V_{DD} to V_{SS} range must not exceed 5.5V as stated in Table 1.

POWER SUPPLY RECOMMENDATIONS

Analog Devices, Inc., has a wide range of power management products to meet the requirements of most high performance signal chains.

An example of a 3V unipolar power solution is shown in Figure 60. The ADP162 ultra-low quiescent current, 150mA, CMOS linear regulator generates a positive supply rail for the ADG1712 along with other components such as amplifiers and/or a precision converter in a typical signal chain.

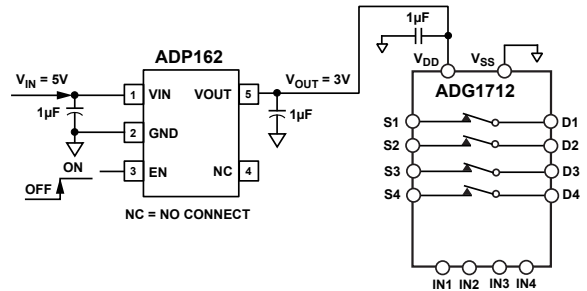


Figure 60. Power Supply Recommendation

OUTLINE DIMENSIONS

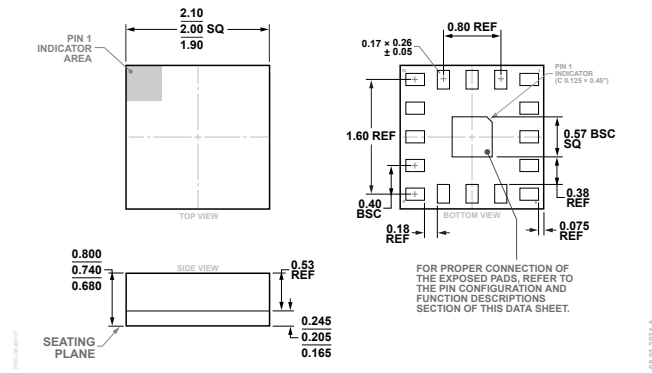


Figure 61. 16-Lead Land Grid Array [LGA]
2mm × 2mm Body and 0.74mm Package Height
(CC-16-10)
 Dimensions shown in millimeters

ORDERING GUIDE

| Model ¹ | Temperature | Package Description | Package Option | Package Quantity |
|--------------------|-----------------|-----------------------------------|----------------|------------------|
| ADG1712BCCZ-RL7 | -40°C to +125°C | 16-Terminal Land Grid Array [LGA] | CC-16-10 | Reel, 1500 |

¹ Z = RoHS Compliant Part.

EVALUATION BOARDS

| Model ¹ | Description |
|--------------------|------------------|
| EVAL-ADG1712ARDZ | Evaluation Board |

¹ Z = RoHS Compliant Part.

Legal Terms and Conditions

Information furnished by Analog Devices is believed to be accurate and reliable "as is". However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners. All Analog Devices products contained herein are subject to release and availability.