


### FEATURES

- Outputs May Be Paralleled for Higher Current and Heat Spreading
- Single Resistor Sets Output Voltage
- Output Adjustable to 0V <sup>2%</sup>
- 10µA SET Pin Current: ~~1%~~ Initial Accuracy
- Total Ionizing Dose (TID) Tolerance, per TM1019.8, MIL-STD-883 up to:
  - 200kRad (Si), per Condition A, at 50Rads(Si)/sec
  - 100kRad (Si), per Condition D, at 10mRads(Si)/sec
  - ELDRS Pass 100kRad(Si)
- Displacement Damage Defects (DDD) Up to 1E12 Neutrons/cm<sup>2</sup>
- Single Event Latchup (SEL) Threshold Linear Energy Transfer (LET) ≥110MeV.cm<sup>2</sup>/mg at T<sub>CASE</sub> = 100°C
- MIL-PRF-38535 Class V Compliant

### DESCRIPTION

The RH3080 is a 0.9A low dropout linear regulator with a unique architecture featuring a precision current source and voltage follower which allows the output to be programmed to any voltage between zero and 36V. Multiple regulators can be paralleled to increase total output current and spread heat over a system PC board with no need for heat sinking. The pass transistor collector can be brought out independently of the circuit supply voltage to allow dropout voltage to approach the saturation limit of the pass transistor. A 2.2µF capacitor on the output with an ESR of less than 0.5Ω is adequate to ensure stability. Applications with large output load transients require a larger output capacitor value to minimize output voltage change. Input circuitry ensures output safe operating area current limiting and thermal shutdown protection. The rated output current of an RH3080-based part is fixed by internal wire length/resistance. Linear Technology dice element evaluations are based on parts rated for 0.9A output current.

### DICE PINOUT

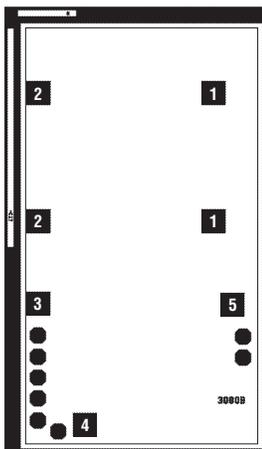

44mils x 75mils  
 Backside metal: Alloyed gold layer  
 Backside potential: OUT  
 Tie SENSE to OUT

#### PAD FUNCTION

1. IN
2. OUT
3. SENSE
4. SET
5. V<sub>CONTROL</sub>

#### DIE CROSS REFERENCE

| LTC® Finished Part Number | Order Part Number    |
|---------------------------|----------------------|
| <b>RH3080MK</b>           | <b>RH3080MK DICE</b> |
| <b>RH3080MK</b>           | <b>RH3080MK DWF*</b> |

Please refer to [LT<sup>®</sup>3080](#) standard product data sheet for other applicable product information.

\*DWF – DICE in wafer form.

### ABSOLUTE MAXIMUM RATINGS

(Note 1) (All voltages relative to V<sub>OUT</sub>)

|  |                |
|--|----------------|
| V <sub>CONTROL</sub> Pin Voltage .....                   | 40V, –0.3V     |
| IN Pin Voltage (Note 11).....                            | 40V, –0.3V     |
| SET Pin Current (Note 6) .....                           | ±10mA          |
| SET Pin Voltage (Relative to OUT, Note 6) .....          | ±0.3V          |
| Output Short-Circuit Duration .....                      | Indefinite     |
| Operating Junction Temperature Range (Notes 2, 10) ..... | –55°C to 125°C |
| Storage Temperature Range .....                          | –65°C to 150°C |

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

## TABLE 1. DICE/DWF ELECTRICAL TEST LIMITS $T_A = 25^\circ\text{C}$ (Notes 2, 5, 8, 9, 12)

| PARAMETER                                     | CONDITIONS   | MIN   | MAX        | UNITS         |
|---|--|-------|------------|---------------|
| SET Pin Current (Note 6)                      | $V_{IN} = 1\text{V}$ , $V_{CONTROL} = 2\text{V}$ , $I_{LOAD} = 1\text{mA}$                               | 9.9   | 10.1       | $\mu\text{A}$ |
| Output Offset Voltage ( $V_{OUT} - V_{SET}$ ) | $V_{IN} = 1\text{V}$ , $V_{CONTROL} = 2\text{V}$ , $I_{LOAD} = 1\text{mA}$                               | -5    | 5          | mV            |
| Load Regulation, $I_{SET}$                    | $I_{LOAD} = 1\text{mA}$ to 100mA   | -15   | 15         | nA            |
| Load Regulation, $V_{OS}$                     | $I_{LOAD} = 1\text{mA}$ to 100mA   | -1.0  | 1.0        | mV            |
| Line Regulation, $I_{SET}$                    | $V_{IN} = 1\text{V}$ to 26V, $V_{CONTROL} = 2\text{V}$ to 26V, $I_{LOAD} = 1\text{mA}$                   | -0.45 | 0.45       | nA/V          |
| Line Regulation, $V_{OS}$                     | $V_{IN} = 1\text{V}$ to 26V, $V_{CONTROL} = 2\text{V}$ to 26V, $I_{LOAD} = 1\text{mA}$                   | -0.05 | 0.05       | mV/V          |
| Minimum Load Current (Note 3)                 | $V_{IN} = 10\text{V}$ , $V_{CONTROL} = 10\text{V}$<br>$V_{IN} = 26\text{V}$ , $V_{CONTROL} = 26\text{V}$ |       | 0.4<br>0.9 | <br>mA<br>mA  |
| $V_{CONTROL}$ Dropout Voltage (Note 4)        | $V_{IN} = 1\text{V}$ , $I_{LOAD} = 0.1\text{A}$  |       | 1.4        | V             |
| $V_{IN}$ Dropout Voltage (Note 4)             | $V_{CONTROL} = 2\text{V}$ , $I_{LOAD} = 0.1\text{A}$   |       | 0.17       | V             |
| $V_{CONTROL}$ Pin Current (Note 5)            | $V_{IN} = 1\text{V}$ , $V_{CONTROL} = 2\text{V}$ , $I_{LOAD} = 0.1\text{A}$                              |       | 5.3        | mA            |

## TABLE 2. ELECTRICAL CHARACTERISTICS (Preirradiation) (Notes 2, 9, 12)

| PARAMETER                                     | CONDITIONS   | $T_A = 25^\circ\text{C}$ |                         | SUB-GROUP | $-55^\circ\text{C} < T_A < 125^\circ\text{C}$ |                         | SUB-GROUP    | UNITS               |
|---|--|--------------------------|-------------------------|-----------|---|-------------------------|--------------|---------------------|
|   |  | MIN                      | MAX                     |           | MIN   | MAX                     |              |                     |
| SET Pin Current (Note 6)                      | $V_{IN} = 1\text{V}$ , $V_{CONTROL} = 2\text{V}$ , $I_{LOAD} = 1\text{mA}$   | <del>9.8</del><br>9.9    | <del>10.2</del><br>10.1 | 1         | 9.8   | <del>10.4</del><br>10.2 | 2, 3         | $\mu\text{A}$       |
| Output Offset Voltage ( $V_{OUT} - V_{SET}$ ) | $V_{IN} = 1\text{V}$ , $V_{CONTROL} = 2\text{V}$ , $I_{LOAD} = 1\text{mA}$   | -5                       | 5                       | 1         | -6  | 6                       | 2, 3         | mV                  |
| Load Regulation, $I_{SET}$                    | $I_{LOAD} = 1\text{mA}$ to 0.9A  | -15                      | 15                      | 1         | -30   | 30                      | 2, 3         | nA                  |
| Load Regulation, $V_{OS}$                     | $I_{LOAD} = 1\text{mA}$ to 0.9A  | -1.0                     | 1.0                     | 1         | -1.5  | 1.5                     | 2, 3         | mV                  |
| Line Regulation, $I_{SET}$ (Note 11)          | $V_{IN} = 1\text{V}$ to 26V, $V_{CONTROL} = 2\text{V}$ to 26V,<br>$I_{LOAD} = 1\text{mA}$                                      | -0.45                    | 0.45                    | 1         | -0.6  | 0.6                     | 2, 3         | nA/V                |
| Line Regulation, $V_{OS}$ (Note 11)           | $V_{IN} = 1\text{V}$ to 26V, $V_{CONTROL} = 2\text{V}$ to 26V,<br>$I_{LOAD} = 1\text{mA}$                                      | -0.05                    | 0.05                    | 1         | -0.06   | 0.06                    | 2, 3         | mV/V                |
| Minimum Load Current (Notes 3, 11)            | $V_{IN} = 10\text{V}$ , $V_{CONTROL} = 10\text{V}$<br>$V_{IN} = 26\text{V}$ , $V_{CONTROL} = 26\text{V}$                       |                          | 0.4<br>0.9              | 1<br>1    |   | 0.6<br>1                | 2, 3<br>2, 3 | <br>mA<br>mA        |
| $V_{CONTROL}$ Dropout Voltage (Note 4)        | $V_{IN} = 1\text{V}$ , $I_{LOAD} = 0.1\text{A}$  |                          | 1.4                     | 1         |   | 1.5                     | 2, 3         | V                   |
|   | $V_{IN} = 1\text{V}$ , $I_{LOAD} = 0.5\text{A}$  |                          | 1.5                     | 1         |   |                         | 2, 3         | V                   |
|   | $V_{IN} = 1\text{V}$ , $I_{LOAD} = 0.9\text{A}$  |                          | 1.5                     | 1         |   | 1.7                     | 2, 3         | V                   |
| $V_{IN}$ Dropout Voltage (Note 4)             | $V_{CONTROL} = 2\text{V}$ , $I_{LOAD} = 0.1\text{A}$   |                          | 0.17                    | 1         |   | 0.2                     | 2, 3         | V                   |
|   | $V_{CONTROL} = 2\text{V}$ , $I_{LOAD} = 0.5\text{A}$   |                          | 0.27                    | 1         |   |                         | 2, 3         | V                   |
|   | $V_{CONTROL} = 2\text{V}$ , $I_{LOAD} = 0.8\text{A}$   |                          | 0.45                    | 1         |   | 0.6                     | 2, 3         | V                   |
| $V_{CONTROL}$ Pin Current (Note 5)            | $V_{IN} = 1\text{V}$ , $V_{CONTROL} = 2\text{V}$ , $I_{LOAD} = 0.1\text{A}$  |                          | 5.3                     | 1         |   | 6.3                     | 2, 3         | mA                  |
|   | $V_{IN} = 1\text{V}$ , $V_{CONTROL} = 2\text{V}$ , $I_{LOAD} = 0.9\text{A}$  |                          | 22                      | 1         |   | 30                      | 2, 3         | mA                  |
| Current Limit                                 | $V_{IN} = 5\text{V}$ , $V_{CONTROL} = 5\text{V}$ , $V_{SET} = 0\text{V}$ ,<br>$V_{OUT} = -0.1\text{V}$                         |                          | 0.9                     | 1         |   | 0.9                     | 2, 3         | A                   |
| Error Amplifier RMS Output Noise (Note 7)     | $I_{LOAD} = 0.9\text{A}$ , $10\text{Hz} \leq f \leq 100\text{kHz}$ , $C_{OUT} = 10\mu\text{F}$ ,<br>$C_{SET} = 0.1\mu\text{F}$ |                          | TYP = 40                | 1         |   |                         |              | $\mu\text{V}_{RMS}$ |
| Reference Current RMS Output Noise (Note 7)   | $10\text{Hz} \leq f \leq 100\text{kHz}$  |                          | TYP = 1                 | 1         |   |                         |              | nA <sub>RMS</sub>   |

**TABLE 3. ELECTRICAL CHARACTERISTICS** (Postirradiation) (Notes 2, 9, 12)

| PARAMETER                                     | CONDITIONS  | 10KRads(Si) |              | 20KRads(Si) |              | 50KRads(Si) |              | 100KRads(Si) |              | 200KRads(Si) |              | UNITS             |
|---|---|-------------|--------------|-------------|--------------|-------------|--------------|--------------|--------------|--------------|--------------|-------------------|
|   |   | MIN         | MAX          | MIN         | MAX          | MIN         | MAX          | MIN          | MAX          | MIN          | MAX          |                   |
| SET Pin Current (Note 6)                      | $V_{IN} = 1V, V_{CONTROL} = 2V, I_{LOAD} = 1mA$                                   | 9.8         | 10.4<br>10.2 | 9.8         | 10.4<br>10.2 | 9.8         | 10.5<br>10.3 | 9.8          | 10.6<br>10.4 | 9.8          | 10.7<br>10.5 | $\mu A$           |
| Output Offset Voltage ( $V_{OUT} - V_{SET}$ ) | $V_{IN} = 1V, V_{CONTROL} = 2V, I_{LOAD} = 1mA$                                   | -8          | 8            | -8          | 8            | -8          | 8            | -9           | 9            | -10          | 10           | mV                |
| Load Regulation, $I_{SET}$                    | $I_{LOAD} = 1mA$ to 0.9A  | -15         | 15           | -15         | 15           | -25         | 25           | -25          | 25           | -25          | 25           | nA                |
| Load Regulation, $V_{OS}$                     | $I_{LOAD} = 1mA$ to 0.9A  | -1.25       | 1.25         | -1.3        | 1.3          | -1.35       | 1.35         | -1.4         | 1.4          | -1.5         | 1.5          | mV                |
| Line Regulation, $I_{SET}$                    | $V_{IN} = 1V$ to 26V, $V_{CONTROL} = 2V$ to 26V, $I_{LOAD} = 1mA$                 | -0.8        | 0.8          | -0.8        | 0.8          | -0.9        | 0.9          | -0.9         | 0.9          | -1           | 1            | nA/V              |
| Line Regulation, $V_{OS}$                     | $V_{IN} = 1V$ to 26V, $V_{CONTROL} = 2V$ to 26V, $I_{LOAD} = 1mA$                 | -0.06       | 0.06         | -0.08       | 0.08         | -0.1        | 0.1          | -0.15        | 0.15         | -0.2         | 0.2          | mV/V              |
| Minimum Load Current (Note 3)                 | $V_{IN} = 10V, V_{CONTROL} = 10V$   |             | 0.4          |             | 0.4          |             | 0.4          |              | 0.4          |              | 0.4          | mA                |
|   | $V_{IN} = 26V, V_{CONTROL} = 26V$   |             | 0.9          |             | 0.9          |             | 0.9          |              | 0.9          |              | 0.9          | mA                |
| $V_{CONTROL}$ Dropout Voltage (Note 4)        | $V_{IN} = 1V, I_{LOAD} = 0.1A$  |             | 1.5          |             | 1.5          |             | 1.55         |              | 1.6          |              | 1.65         | V                 |
|   | $V_{IN} = 1V, I_{LOAD} = 0.9A$  |             | 1.5          |             | 1.5          |             | 1.55         |              | 1.6          |              | 1.65         | V                 |
| $V_{IN}$ Dropout Voltage (Note 4)             | $V_{CONTROL} = 2V, I_{LOAD} = 0.1A$   |             | 0.2          |             | 0.21         |             | 0.23         |              | 0.25         |              | 0.3          | V                 |
|   | $V_{CONTROL} = 2V, I_{LOAD} = 0.8A$   |             | 0.5          |             | 0.51         |             | 0.53         |              | 0.55         |              | 0.6          | V                 |
| CONTROL Pin Current (Note 5)                  | $V_{IN} = 1V, V_{CONTROL} = 2V, I_{LOAD} = 0.1A$                                  |             | 5.3          |             | 5.3          |             | 5.3          |              | 5.3          |              | 5.3          | mA                |
|   | $V_{IN} = 1V, V_{CONTROL} = 2V, I_{LOAD} = 0.9A$                                  |             | 22           |             | 22           |             | 22           |              | 22           |              | 22           | mA                |
| Current Limit                                 | $V_{IN} = 5V, V_{CONTROL} = 5V, V_{SET} = 0V, V_{OUT} = -0.1V$                    | 0.9         |              | 0.9         |              | 0.9         |              | 0.9          |              | 0.9          |              | A                 |
| Error Amplifier RMS Output Noise (Note 7)     | $I_{LOAD} = 0.9A, 10Hz \leq f \leq 100kHz, C_{OUT} = 10\mu F, C_{SET} = 0.1\mu F$ | TYP = 40    |              | TYP = 40    |              | TYP = 40    |              | TYP = 40     |              | TYP = 40     |              | $\mu V_{RMS}$     |
| Reference Current RMS Output Noise (Note 7)   | $10Hz \leq f \leq 100kHz$   | TYP = 1     |              | TYP = 1     |              | TYP = 1     |              | TYP = 1      |              | TYP = 1      |              | nA <sub>RMS</sub> |

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** Unless otherwise specified, all voltages are with respect to  $V_{OUT}$ . The RH3080MK DICE is tested and specified under pulse load conditions such that  $T_J \approx T_A$ .

**Note 3:** Minimum load current is equivalent to the quiescent current of the part. Since all quiescent and drive current is delivered to the output of the part, the minimum load current is the minimum current required to maintain regulation.

**Note 4:** Dropout results from either of minimum control voltage,  $V_{CONTROL}$ , or minimum input voltage,  $V_{IN}$ , both specified with respect to  $V_{OUT}$ . These specifications represent the minimum input-to-output differential voltage required to maintain regulation.

**Note 5:** The  $V_{CONTROL}$  pin current is the drive current required for the output transistor. This current tracks output current with roughly a 1:60 ratio. The minimum value is equal to the quiescent current of the device.

**Note 6:** SET pin is clamped to the output with diodes. These devices only carry current under transient overloads.

**Note 7:** Adding a small capacitor across the reference current resistor lowers output noise. Adding this capacitor bypasses the resistor shot noise and reference current noise; output noise is then equal to error amplifier noise (see LT3080 data sheet and Application Note AN83).

**Note 8:** Dice are probe tested at 25°C to the limits shown in Table 1.

Except for high current tests, dice are tested under low current conditions which assure full load current specifications when assembled.

**Note 9:** Dice that are not qualified by Linear Technology with a can sample are guaranteed to meet specifications of Table 1 only. Dice qualified by Linear Technology with a can sample meet specifications in all tables.

**Note 10:** This IC includes overtemperature protection that is intended to protect the device during momentary overload conditions. Junction temperature exceeds the maximum operating junction temperature when overtemperature protection is active. Continuous operation above the specified maximum operating junction temperature may impair device reliability.

**Note 11:** Current limit may decrease to zero at input-to-output differential voltages ( $V_{IN} - V_{OUT}$ ) greater than 26V. Operation at voltages for both IN and  $V_{CONTROL}$  is allowed up to a maximum of 36V as long as the difference between input and output voltage is below the specified differential ( $V_{IN} - V_{OUT}$ ) voltage. Line and load regulation specifications are not applicable when the device is in current limit.

**Note 12:** Please refer to LT3080 standard product data sheet for Typical Performance Characteristics, Pin Functions, Applications Information and Typical Applications.

**TABLE 4. POST BURN-IN ENDPOINTS AND DELTA LIMIT REQUIREMENTS**  $T_A = 25^\circ\text{C}$

| PARAMETER                | CONDITIONS   | ENDPOINT LIMITS |      | DELTA LIMITS |     | UNITS         |
|--------------------------|--|-----------------|------|--------------|-----|---------------|
|                          |  | MIN             | MAX  | MIN          | MAX |               |
| SET Pin Current (Note 6) | $V_{IN} = 1\text{V}$ , $V_{CONTROL} = 2\text{V}$ , $I_{LOAD} = 1\text{mA}$ | 9.9             | 10.2 | -0.1         | 0.1 | $\mu\text{A}$ |
|                          |  | 9.8             |      | -0.2         | 0.2 |               |

**TABLE 5. ELECTRICAL TEST REQUIREMENTS**

| MIL-STD-883 TEST REQUIREMENTS  | SUBGROUP |
|--|----------|
| Final Electrical Test Requirements (Method 5004)                         | 1*, 2, 3 |
| Group A Test Requirements (Method 5005)                                  | 1, 2, 3  |
| Group B and D for Class S, End Point Electrical Parameters (Method 5005) | 1, 2, 3  |


\*PDA applies to subgroup 1. See PDA Test Notes.

**PDA Test Notes**


The PDA is specified as 5% based on failures from Group A, Subgroup 1, tests after cooldown as the final electrical test in accordance with method 5004 of MIL-STD-883. The verified failures of Group A, Subgroup 1, after burn-in divided by the total number of devices submitted for burn-in in that lot shall be used to determine the percent for the lot.

Linear Technology Corporation reserves the right to test to tighter limits than those given.


**TOTAL DOSE BIAS CIRCUIT**

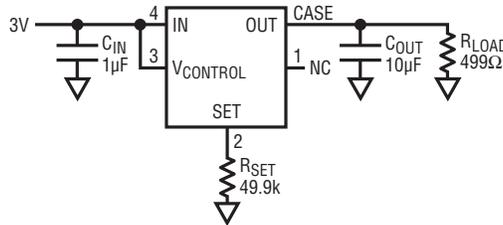


**BURN-IN CIRCUIT**

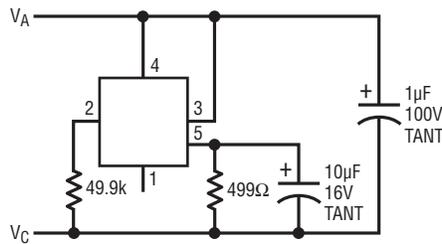


$V_A = V_5 = 24.5\text{V TO } 26.5\text{V}$   
 $V_C = \text{GROUND}$   
 $T_A = 125^\circ\text{C}$   
 $T_{J\text{MAX}} = 135^\circ\text{C}$   
 THERMAL SHUTDOWN =  $160 \pm 10^\circ\text{C}$   
 DUT CURRENT = 1mA




# TYPICAL PERFORMANCE CHARACTERISTICS

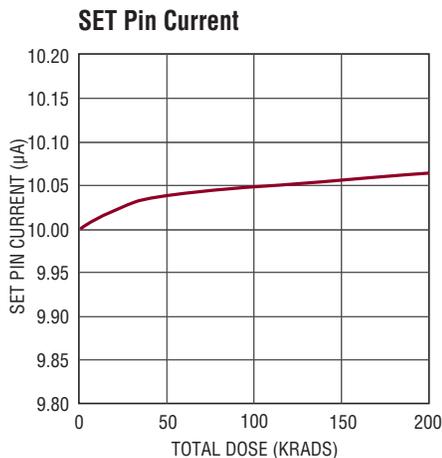


RH3080 G01

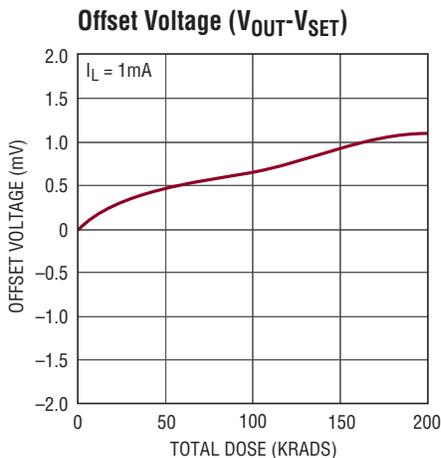


RH3080 G02

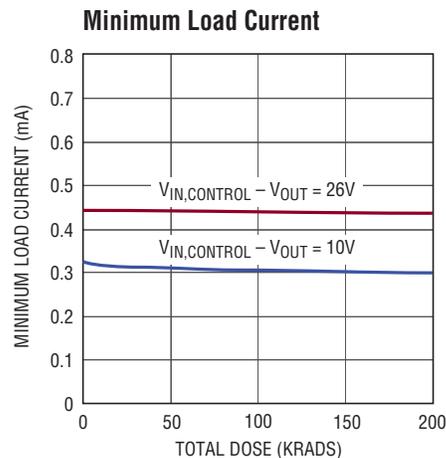


RH3080 G03

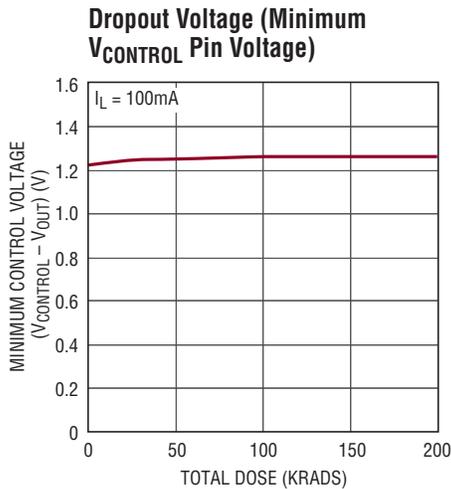


RH3080 G04

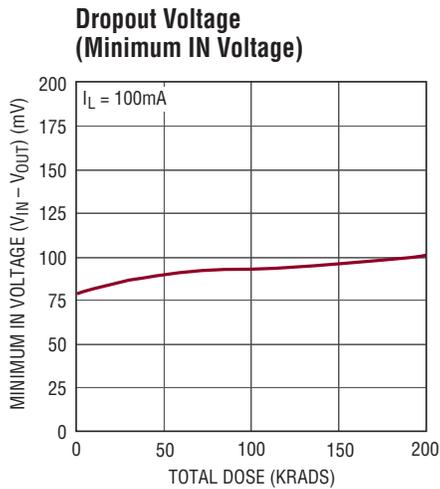

RH3080 G05

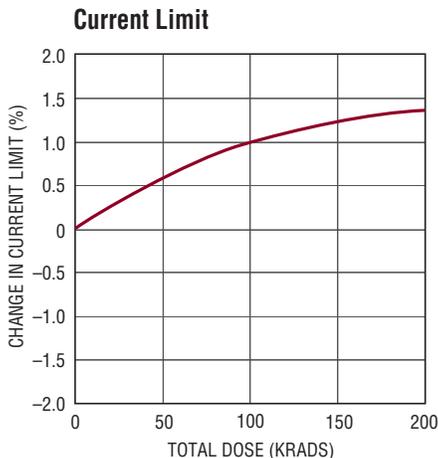

RH3080 G06

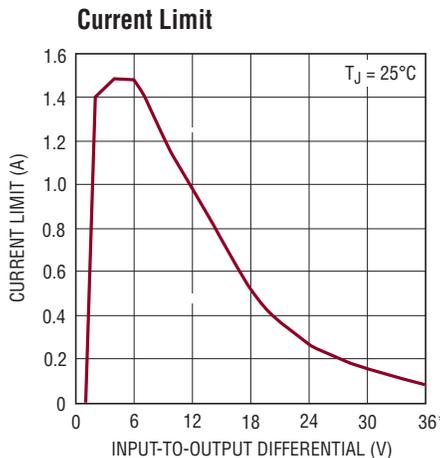

\*SEE NOTE 11 IN ELECTRICAL CHARACTERISTICS TABLE

3080 G07

# RH3080MK DICE/~~DWF~~

---

## REVISION HISTORY (Revision history begins at Rev B)

| REV | DATE  | DESCRIPTION   | PAGE NUMBER |
|-----|-------|---|-------------|
| B   | 10/14 | $V_{\text{CONTROL}}$ Pin Current, $I_{\text{LOAD}} = 0.9\text{A}$ ; Line Reg $I_{\text{SET}}/V_{\text{OS}}$ $V_{\text{CONTROL}} = 2\text{V}$ to $26\text{V}$ , added Notes 11, 12 | 1, 2, 3     |
| C   | 05/15 | $V_{\text{A}} = V_5 = 24.5\text{V}$ to $26.5\text{V}$   | 4           |