

High Performance LDO Technology

Ultralow Noise LDO Voltage Regulators

Discover Analog Devices' (ADI) best-in-class ultralow noise low dropout (LDO) linear regulators, setting the industry standard where performance matters most. Our LDOs excel in three critical performance pillars:

- Noise and PSRR, providing unmatched noise suppression across a broad frequency spectrum
- Low quiescent current, guaranteeing extended battery life in portable devices
- Dropout voltage, ensuring the most efficient regulation even with minimal voltage differential

5.5 V, 3 A Ultralow Noise, High PSRR, 45 mV Dropout Linear Regulator with PMBus®


- Ultrafast LDO for RF power supplies, high speed/high precision data converters, low noise instrumentation, FPGAs, DSP, microprocessors, and medical applications
- Unity-gain and precision current source reference architecture that allows easy direct output paralleling
- PMBus-compliant serial interface and commands for control, telemetry, and fault warnings



For more information on Analog Devices high performance LDO regulators, visit analog.com/LDO.

Ultralow Noise LDO Regulators

- Industry's lowest noise 20 V LDO with just 0.8 $\mu\text{V rms}$
- Enable systems to perform at their peak without the interference of power supply noise:
 - Minimize phase noise in PLLs
 - Reduce jitter in clock generators
 - Ensure stability in VCOs

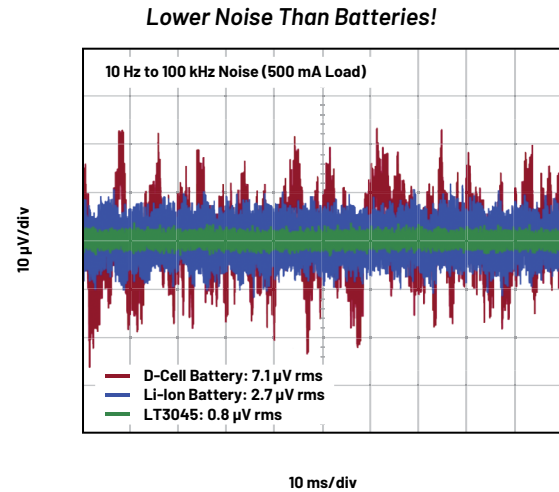

Lowest Noise LDO Voltage Regulators

	Part Number	V_{IN} Max (V)	V_{OUT} Range (V)	I_{OUT} (A)	I_O (mA)	PSRR (dB)	Noise ($\mu\text{V rms}$)	AEC-Q100	Enable	V_{OUT} Control	Package (mm)
5.5 V Input	ADP151	2.2 to 5.5	1.1 to 3.3	0.2	0.01	55	9	Yes	Yes	Fixed	0.8 × 0.8, 4-ball WLCSP 2 × 2, 6-lead LFCSP 5-lead TSOT
	ADM7170	2.3 to 6.5	1.2 to 6.4	0.5	0.7	60	5	No	Yes	Fixed/ voltage divider	3 × 3, 8-lead LFCSP
	ADM7155/ ADM7154	2.3 to 5.5	1.2 to 3.4	0.6	4	95	1.6	No	Yes	Fixed/ voltage divider	3 × 3, 8-lead LFCSP 8-lead SOIC
	MAX38914/ MAX38913	1.8 to 5.5	0.6 to 5	1	1.37	60	4	No	Yes	Fixed/ digital pins	1.9 × 1.3, 12-ball WLP 3 × 3, 12-lead TDFN
	MAX25301A/ MAX25301B	1.7 to 5.5	0.6 to 5.3	1	1.2	70	7	Yes	Yes	Digital pins/ voltage divider	3 × 3, 10-lead TDFN
	ADP1761	1.1 to 1.98	0.5 to 1.5	1	4.5	51	2	Yes	Yes	Fixed and single resistor	3 × 3, 16-lead LFCSP
	MAX25302A/ MAX25302B	1.7 to 5.5	0.6 to 5.0	2	1.3	70	7	Yes	Yes	Digital pins/ voltage divider	3 × 3.5, 14-lead TDFN
	ADP1762	1.1 to 1.98	0.5 to 1.5	2	4.5	46	2	Yes	Yes	Fixed and single resistor	3 × 3, 16-lead LFCSP
	ADP1763	1.1 to 1.98	0.5 to 1.5	3	4.5	43	2	Yes	Yes	Fixed and single resistor	3 × 3, 16-lead LFCSP
	LT3074	0.6 to 5.5	0.1 to 5.5	3	4.6	55	1.2	No	Yes	Single resistor	3 × 4, 22-lead LQFN
	LT3073	0.6 to 5.5	0.5 to 4.2	3	4.3	55	1.2	No	Yes	Digital pins	3 × 4, 22-lead LQFN
	LT3077	0.6 to 5.5	0.5 to 4.2	3	4.3	53	1.2	No	Yes	Digital pins	3 × 3, 18-lead LFCSP
	ADP1764	1.1 to 1.98	0.5 to 1.5	4	5	46	2	No	Yes	Fixed and single resistor	3 × 3, 16-lead LFCSP
	ADP1765	1.1 to 1.98	0.5 to 1.5	5	5	43	2	No	Yes	Fixed and single resistor	3 × 3, 16-lead LFCSP
	LT3078	0.6 to 5.5	0.5 to 4.2	5	4.3	50	1.3	No	Yes	Digital pins	3 × 4, 22-lead LQFN

Lowest Noise LDO Voltage Regulators (Continued)

	Part Number	V _{IN} Max (V)	V _{OUT} Range (V)	I _{OUT} (A)	I ₀ (mA)	PSRR (dB)	Noise (μV rms)	AEC-Q100	Enable	V _{OUT} Control	Package (mm)
6 V to 20 V Input	LT3040	1.8 to 20	0 to 15	0.2	2.5	75	1.2	No	Yes	Single resistor	3 × 3, 10-lead DFN
	LT3042	2 to 20	0 to 15	0.2	2	78	0.8	Yes	Yes	Single resistor	3 × 3, 10-lead DFN
	LT3046	2.2 to 20	0.2 to 19	0.2	3.7	81	0.8	No	Yes	Single resistor	3 × 3, 12-lead DFN 1.6 × 1.7, 11-ball WLSCP
	LT3045/ LT3045-1	2 to 20	0 to 15	0.5	2.2	77	0.8	Yes	Yes	Single resistor	3 × 3, 10-lead DFN 12-lead MSOP
	ADM7150/ ADM7151	4.5 to 16	1.5 to 5.1	0.8	4.3	91	1.6	No	Yes	Fixed/ voltage divider	8-lead LFCSP 8-lead SOIC
	LT3041	2.2 to 20	0.2 to 15	1	4.3	77	1	No	Yes	Single resistor	4 × 3, 14-lead DFN
21 V to 40 V Input	ADP7142	2.7 to 40	1.2 to 39.8	0.2	0.05	68	11	Yes	Yes	Fixed/ voltage divider	2 × 2, 6-lead LFCSP 8-lead SOIC 5-lead TSOT
	LT3065/ LT3066	1.8 to 45	0.6 to 19	0.5	0.055	54	25	Yes	Yes	Fixed/ voltage divider	3 × 4, 12-lead DFN 12-lead MSOP
	LT3088/ LT3089	1.2 to 36	0 to 34.5	0.8	0.05	32	27	No	No	Fixed/ single resistor	4 × 4, 12-lead, DFN 16-lead TSSOP 7-lead DD-Pak
	LT3081	1.2 to 36	0 to 34.5	1.5	0.05	28	27	No	No	Fixed/ single resistor	4 × 4, 12-lead, DFN 16-lead TSSOP 7-lead DD-Pak 7-lead TO-220
40 V to 60 V Input	LT3061	1.6 to 45	3.3 to 19	0.1	0.045	28	30	No	Yes	Fixed/ voltage divider	2 × 3, 8-lead DFN 8-lead MSOP
	LT3062/ LT3063	1.6 to 45	0.6 to 40	0.2	0.045	30	30	No	Yes	Fixed/ voltage divider	2 × 3, 8-lead DFN 8-lead MSOP
	LT3065/ LT3066	1.6 to 45	0.6 to 40	0.5	0.055	18	25	Yes	Yes	Fixed/ voltage divider	3 × 3, 10-lead DFN 12-lead MSOP
Negative LDO	ADP7183	-5.5 to -2	-0.5 to -5	0.3	0.6	50	4	No	Yes	Fixed and voltage divider	2 × 2, 8-lead LFCSP
	ADP7185	-5.5 to -2	-0.5 to -5	0.5	0.6	50	5	No	Yes	Fixed and voltage divider	2 × 2, 8-lead LFCSP
	LT3093	-1.8 to -20	0 to -19.5	0.2	2.35	76	0.8	No	Yes	Voltage divider	6 × 3, 22-lead DFN
	LT3094	-1.8 to -20	0 to -19.5	0.5	2.35	75	0.8	No	Yes	Voltage divider	6 × 3, 22-lead DFN
	LT3091	-1.5 to -36	0 to -32	1.5	1.2	35	18	No	Yes	Single resistor	4 × 3, 14-lead DFN 16-lead TSSOP 7-lead TO-220

Ultralow Quiescent Current LDOs

- Crucial for applications where energy efficiency is paramount
- Less power consumed when in standby or idle mode, extending battery life
- Applications: IoT devices, wearables, portable electronics
- Low I_Q LDOs improve efficiency in low power circuits for industrial, automotive, and battery-powered systems

Discharge Time of 1-Cell Li-Ion 900 mAh Battery

	ADP162	LD01	LD02
Load (mA)	5	5	5
I_Q (μ A)	5	100	1000
Discharge Time (h)	806	735	405


Note: LD01 and LD02 serve as examples of LDOs with higher quiescent current, illustrating their effect on battery operating time.

Ultralow Quiescent Current LDO Voltage Regulators

	Part Number	V_{IN} Range (V)	V_{OUT} Range (V)	I_{OUT} (A)	I_Q (μ A)	PSRR (dB) 100 kHz	Noise (μ V rms)	V_{OUT} Control	Package (mm)
5.5 V Input	ADP165/ ADP166	2.2 to 5.5	1.2 to 3.3	0.15	0.59	32	105	Fixed	5-lead TSOT 2 × 2, 6-lead LFCSP 4-ball WLCSP
	ADP162/ ADP163	2.2 to 5.5	1 to 4.2	0.15	0.59	32	100	Voltage divider	5-lead TSOT 2 × 2, 6-lead LFCSP 4-ball WLCSP
	ADP151	2.2 to 5.5	1.1 to 3.3	0.2	10	55	9	Fixed	5-lead TSOT 2 × 2, 6-lead LFCSP 4-ball WLCSP
	MAX38911/ MAX38912	1.7 to 5.5	0.8 to 5	0.5	20	60	11	Fixed/ voltage divider	2 × 2, 8-lead TDFN 6-ball WLP
6 V to 20 V Input	MAX1725/ MAX1726	2.5 to 12	1.5 to 5	0.02	2	52	350	Fixed/ voltage divider	5-lead SOT-23
	LT3009	1.6 to 20	0.6 to 19.5	0.02	3	32	150	Fixed/ voltage divider	2 × 2, 6-lead DFN 8-lead SC70
	ADPL42001	4 to 20	0.6 to 18	0.1	8	45	—	Voltage divider	3 × 3, 6-lead TDFN 6-lead TSOT
	MAX8880/ MAX8881	2.5 to 12	1.25 to 5	0.2	3.5	—	300	Fixed/ voltage divider	6-lead SOT-23 6-lead TDFN
	LT1521	4.3 to 20	3 to 19.5	0.3	12	33	—	Fixed/ voltage divider	8-lead MSOP 8-lead SOIC 3-lead SOT-223
	MAX604	2.7 to 11.5	1.25 to 11	0.5	15	41	250	Fixed/ voltage divider	8-lead DIP 8-lead SOIC
21 V to 40 V Input	MAX1615/ MAX1616	4 to 28	1.24 to 28	0.03	6.2	35	—	Fixed/ voltage divider	5-lead SOT-23
	ADPL44001	4 to 40	0.6 to 38	0.1	8	45	—	Voltage divider	3 × 3, 6-lead TDFN 6-lead TSOT
	MAX16910	3.5 to 30	1.5 to 11	0.2	20	60	—	Fixed/ voltage divider	3 × 3, 8-lead TDFN 5 × 4, 8-lead SOIC
	MAX25210	3.5 to 40	0.6 to 11	0.05 to 0.3	10	60	—	Fixed/ voltage divider	3 × 3, 8-lead TDFN
Negative Input	MAX664	–2 to –16.5	–1.3 to –15	0.04	12	20	—	Fixed/ voltage divider	8-lead DIP 8-lead SOIC
	LT1964	–1.9 to –20	–1.22 to –20	0.2	30	27	30	Fixed/ voltage divider	5-lead SOT-23 3 × 3, 8-lead DFN

Very Low Dropout Voltage Regulators

- Ability to efficiently regulate with minimal voltage difference between input and output
- Reduction of power consumption due to the smaller voltage difference loss
- Maximizing battery life and enhancing power efficiency (output voltage stable when the battery voltage approaches the output voltage level)

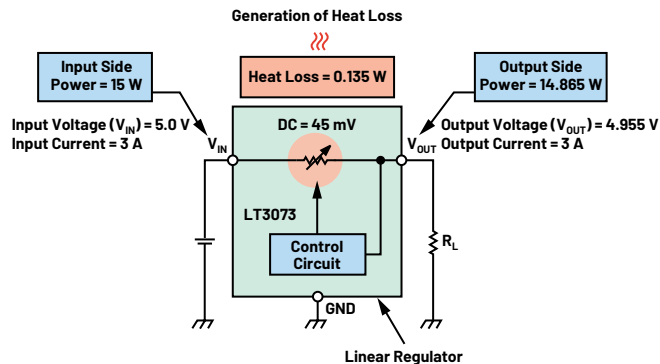

Very Low Dropout Voltage Regulators


	Part Number	V_{IN} Range (V)	V_{OUT} Range (V)	I_{OUT} (A)	LDO (mV)	PSRR (dB) 100 kHz	Noise ($\mu\text{V rms}$)	V_{OUT} Control	Package (mm)
5.5 V Input	LTC3025	0.9 to 5.5	0.4 to 3.6	0.3	45	48	80	Voltage divider	2 × 2, 6-lead DFN
	MAX38902A/ MAX38902B/ MAX38902C/ MAX38902D	1.7 to 5.5	0.6 to 5.3	0.5	50	60	10.5	Fixed/digital pins/ voltage divider	2 × 2, 8-lead TDFN 6-ball WLP
	MAX38902E	1.7 to 5.5	0.8 to 5	0.5	50	45	10.5	Voltage divider	2 × 2, 8-lead TDFN
	ADM7170	2.3 to 6.5	1.2 to 5	0.5	42	60	5	Fixed/voltage divider	3 × 3, 8-lead LFCSP
	MAX38913/ MAX38914	1.8 to 5.5	0.6 to 5	1	28	60	4	Fixed/digital pins	3 × 3, 12-lead TDFN 12-ball WLP
	MAX38909	0.9 to 5.5	0.6 to 5	2	42	42	21.2	Voltage divider	3 × 3, 14-lead TDFN 15-ball WLP
	LT3073/ LT3074	0.6 to 5.5	0.5 to 4.2	3	45	58	1.2	Digital pins/single resistor	3 × 4, 22-lead LQFN
6 V to 20 V Input	ADP1764	1.1 to 1.98	0.5 to 1.5	4	47	46	2	Fixed/single resistor	3 × 3, 16-lead LFCSP
	LT3020	0.9 to 10	0.2 to 9.7	0.1	150	20	245	Fixed/voltage divider	3 × 3, 8-lead DFN 8-lead MSOP
	ADP7112/ ADP7118	2.7 to 20	1.2 to 19.8	0.2	200	68	11	Fixed/voltage divider	6-ball WLCSP 2 × 2, 6-lead LFCSP 8-lead SOIC 5-lead TSOT
	ADP7102	3.3 to 20	1.2 to 19.8	0.3	200	50	15	Fixed/voltage divider	3 × 3, 8-lead LFCSP
	LT3021	0.9 to 10	0.2 to 9.7	0.5	155	45	300	Fixed/voltage divider	5 × 5, 16-lead DFN 8-lead SOIC
	LT3022	0.9 to 10	0.2 to 9.7	1	145	42	165	Fixed/voltage divider	5 × 3, 16-lead DFN 16-lead MSOP
21V to 40 V Input	LT3033	0.95 to 10	0.2 to 9.7	3	95	30	160	Voltage divider	3 × 4, 20-lead QFN
	LT3007/ LT3008	2 to 45	0.6 to 44.5	0.02	300	33	92	Fixed/voltage divider	8-lead SOT-23 2 × 2, 6-lead DFN
	ADP1720	4 to 28	1.22 to 5	0.05	275	52	124	Fixed/voltage divider	8-lead MSOP
	LT3060/ LT3061	1.6 to 45	0.6 to 19	0.1	250	28	30	Fixed/voltage divider	2 × 3, 8-lead DFN 8-lead MSOP
	ADP7142	2.7 to 40	1.2 to 39.8	0.2	200	68	11	Fixed/voltage divider	2 × 2, 5-lead LFCSP 8-lead SOIC 5-lead TSOT
Negative Input	LT3065/ LT3066	1.8 to 45	0.6 to 19	0.5	300	22	25	Fixed/voltage divider	3 × 4, 12-lead DFN 12-lead MSOP
	MAX1735	-2.5 to -6.5	-1.25 to -5.5	0.2	85	28	160	Fixed/voltage divider	5-lead SOT-23
	ADP7183	-2 to -5.5	-0.5 to -5	0.3	600	62	4	Fixed/voltage divider	8-lead LFCSP
	LT3093	-1.8 to -20	0 to -19.5	0.2	10	77	0.8	Voltage divider	6 × 3, 22-lead DFN
	ADP7185	-2 to -5.5	-0.5 to -5	0.5	600	50	4	Fixed	2 × 2, 8-lead LFCSP

Power Management Tools

Analog Devices offers complete power management tools to make designing power system and circuits easier with good quality. Use the LTpowerPlanner tool for system-level power tree design, start with the LTpowerCAD® tool to find solutions and optimize supply designs, and use LTspice® for circuit simulations.



ADI Power

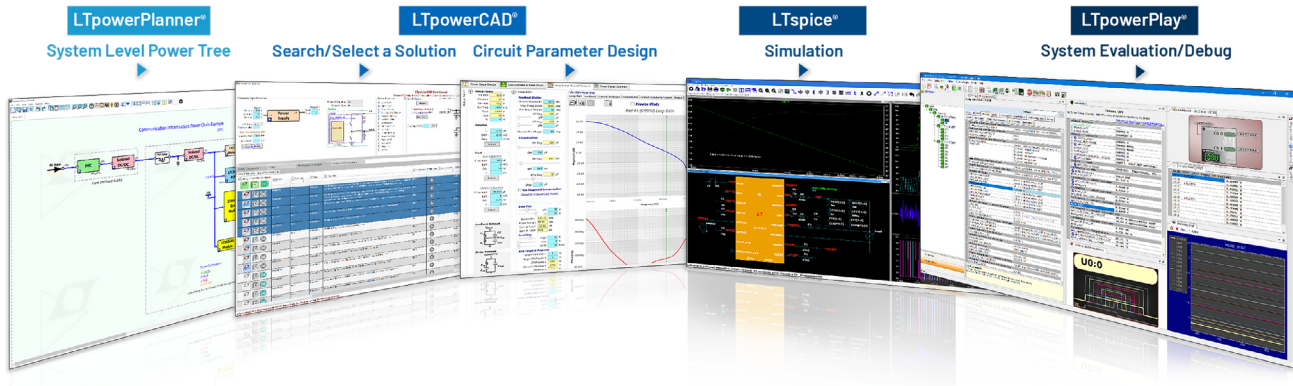

For more information on Analog Devices high performance LDO regulators, visit analog.com/LDO.



Find more power components from Analog Devices at analog.com/power.

myAnalog is your access to the full analog.com experience! Register now to enable your access.

my.analog.com

myAnalog

Engage with the ADI technology experts in our online support community. Ask your tough design questions, browse FAQs, or join a conversation.

ez.analog.com

ADI EngineerZone™



analog.com

For regional headquarters, sales, and distributors or to contact customer service and technical support, visit analog.com/contact.
©2025 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners.

BR26007-9/25(A)