

FEATURES

- ▶ Operates from 8.0GHz to 12GHz
- ▶ 37dBm typical transmit state P_{OUT} at 8.5GHz to 11.5GHz
- ▶ 35dB typical transmit state small signal gain at 8.5GHz to 11.5GHz
- ▶ 23dB typical receive state small signal gain at 8.0GHz to 10.5GHz
- ▶ Coupled power amplifier output for power detection
- ▶ Integrated RF power detector on the transmit path
- ▶ Integrated limiter on the receive path

APPLICATIONS

- ▶ Phased array antenna
- ▶ Military radar
- ▶ Weather radar
- ▶ Communication links
- ▶ Marine radar

GENERAL DESCRIPTION

The ADTR1101 is a compact, 8.0GHz to 12GHz, front-end IC with an integrated power amplifier, low noise amplifier (LNA), and a reflective SPDT switch. These integrated features make the device ideal for phased array antenna and radar applications. The front-end IC offers 37dBm of output power (P_{OUT}) and 35dB small signal gain in transmit state from 8.5GHz to 11.5GHz, and it offers 23dB

For more information on the ADTR1101, contact TR.Modules@analog.com.

FUNCTIONAL BLOCK DIAGRAM

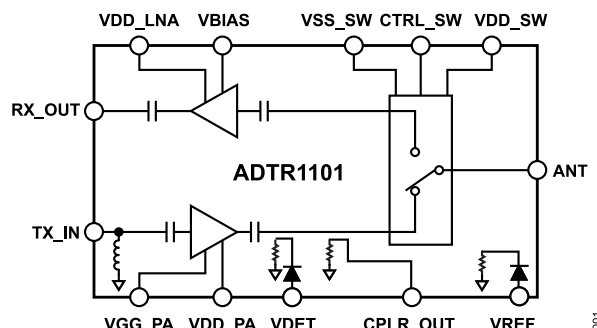


Figure 1. Functional Block Diagram

small signal gain in the receive state from 8.0GHz to 10.5GHz. The device has a directional coupler as well as analog voltage outputs for power detection. In addition, the ADTR1101 also includes an integrated limiter that limits the power to the LNA. The RF input and outputs (I/Os) are internally matched to 50Ω.

NOTES