


REVISIONS			
REV	DESCRIPTION	APPR	DATE
A-1	FINAL FABRICATION	KS	01-15-07

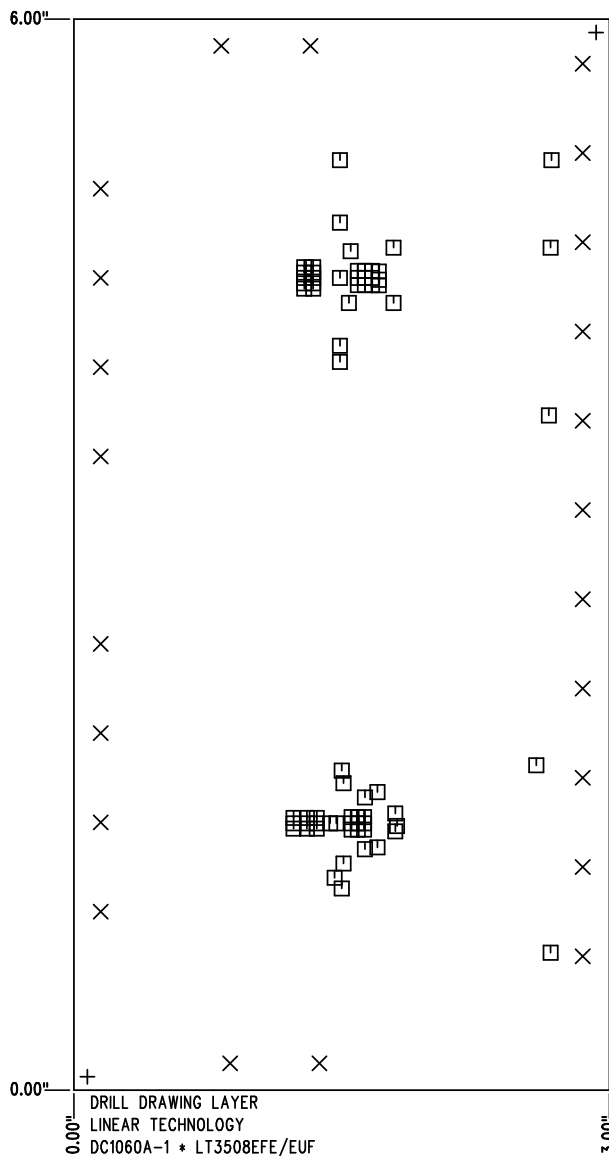


DRILL DRAWING LAYER
 LINEAR TECHNOLOGY
 DC1060A-1 * LT3508EFE/EUF
 DUAL MONOLITHIC 1.4A STEP-DOWN SWITCHING REGULATOR
 DATE: 01-15-07


SHOWN FROM COMPONENT SIDE

SIZE	QTY	SYM	PLATED	TOL
0.07	2	+	NO	+/-0.003"
0.094	23	X	YES	+/-0.003"
0.01	68	□	YES	+/-0.003"

NOTES: UNLESS OTHERWISE SPECIFIED

- FAB PER IPC-A-600
- MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4
 FINISHED THICKNESS TO BE 0.062" +/- .005"
 TOTAL OF 4 LAYERS WITH 2 OZ. CU ON THE
 OUTER LAYERS AND 1 OZ. CU ON THE INNER LAYERS.
 FLAMABILITY RATING: 94 V-0 MINIMUM .
- SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
 0.00" ARE PRIMARY DATUMS.
- DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH
 HOLES WITH COPPER, 0.001" THICK MIN.
 ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
 HOLE LOCATION TOLERANCES ARE +/-0.003"
 IN RELATION TO CENTER
- FINISH: SMOBC USING LPI BOTH SIDES, COLOR GREEN.
 WHITE TIN IMMERSION (OMIKRON).
 FOR SILKSCREEN: USE WHITE NON-CONDUCTIVE INK.
- DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
- SCORING FOR PANELIZED PCB:



APPROVALS			 1630 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)432-1900 LTC CONFIDENTIAL- FOR CUSTOMER USE ONLY	
	INIT	DATE		
DRAWN			TITLE: FABRICATION DRAWING	
CHECK				
DESIGN	KIM T.	01-15-07	DUAL MONOLITHIC 1.4A STEP-DOWN SWITCHING REGULATOR	
ENGR	KEITH S.	01-15-07		
			SIZE A	DEMO
			DC1060A-1 LT3508EFE/EUF	
			REV. A-1	
SCALE = NONE			SHT 1 of 1	