


Silkscreen Top


Assembly Top Drawing

NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
2. INSERT SMA CONNECTORS FLUSH AGAINST BOARD EDGE.
3. ASSY PROCESSES SHALL INCLUDE: REFLOW SOLDER TOP SIDE SMD.
HAND SOLDER BOTTOM SIDE SMD.
HAND SOLDER BOTTOM THRU-HOLE COMPONENTS.
4. PARTS TO OMIT WILL BE SPECIFIED ON THE PARTS LIST.
LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER.
5. SHORTAGES SHALL EXIST ON THE MINIMUM NUMBER OF BOARDS.
6. DO NOT OTHERWISE MARK BOARDS (e.g. NO QA-STAMP).
7. DEPAANELIZE BOARDS AFTER ASSEMBLY.
8. THE VENDOR SHOULD ASSEMBLE ALL THE PARTS DEFINED IN THE BILL OF MATERIAL INCLUDING HAND SOLDER COMPONENTS.
9. THE VENDOR SHOULD ALSO MARK THE VERSION A, B OR C AND SO ON IN THE WHITE BLANK SPACE ON THE SILKSCREEN FOLLOWING THE BOM INSTRUCTION.

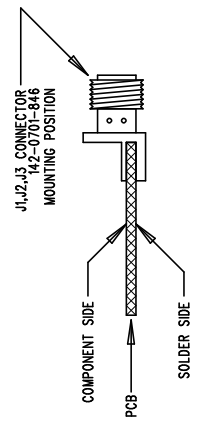

REVISIONS			
REV	DESCRIPTION	APPR	DATE

APPROVALS					1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
	DRAWN	INIT	DATE	TITLE: LT5579IUH HIGH LINEARITY ACTIVE MIXER		
	CHECK					
	DESIGN	Helen	8/31/07			
	ENGR	SUNNY H.	8/31/07			
				SIZE A	DEMO	REV. A
				DC1233A-A/B/C/D		
SCALE = NONE				DES-250		
				SHT 1 of 1		