
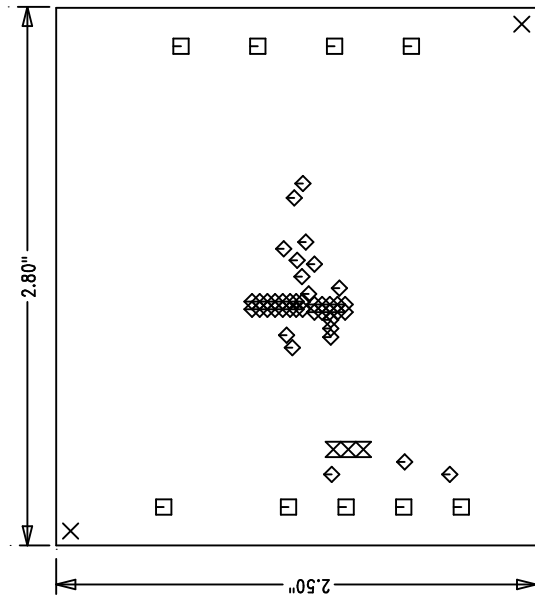


REVISIONS		
REV	DESCRIPTION	DATE

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
2 OZ. COPPER FINISH ON OUTER LAYERS.
1 OZ. COPPER FINISH ON INNER LAYERS.
THICKNESS .062 +/--.006 TOTAL OF 4 LAYERS.
FLAMMABILITY RATING: 94 V-0 MINIMUM .
0.000 ARE PRIMARY DATUMS.
3. SIZE: DIMENSIONS SHOWN AND TOLERANCES TOL: +/--.010
4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/--.003 INCH IN RELATION TO CENTER
5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.
IMMERSION GOLD PLATING
6. SILKSCREEN : BOTH SIDES USING WHITE NON-CONDUCTIVE EPOXY INK.
7. DO NOT ALTER ARTWORK TO ADD LOGO OR DATE CODE
BUT YOU MAY MODIFY PAD SIZE TO MEET END FINISH.
8. PCBs ARE TO BE RoHS COMPLIANT.
9. SCORING:




Top Side

Linear Tech. Corp.
Demo Circuit 1293A

Fabrication Drawing

SIZE	QTY	SYM	PLTD	TOL
0.07	2	✕	NO	+/--.003
0.095	9	□	YES	+/--.003
0.01	43	◇	YES	+/--.003
0.035	3	⋈	YES	+/--.003

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON ANGLE ± 1
2 PLACE ±.01 3 PLACE ±.005
INTERPRET DIM AND TOL
PER ASME Y14.5M - 1994

APPROVALS		 LINEAR TECHNOLOGY 1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
DRAWN	INIT	DATE	
CHECK			
DESIGN	Helen	10/18/07	
ENGR	TIGER Z	10/18/07	
TITLE:		LT1939EDD Monolithic Step-Down Switching Regulator with LDO	
SIZE	A	DC1293A	REV. A
SCALE = NONE		DES	SHEET 1 of 1