


REVISION HISTORY				
ECO	REV	DESCRIPTION	APPR	DATE
-	3	PRODUCTION	KEITH S.	1-31-12

NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
2. ASSEMBLY PROCESS SHALL INCLUDE: REFLOW SOLDER TOP SIDE SMD. MAXIMUM SOLDER TEMPERATURE IS 240 DEGREES CELSIUS.
3. PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS. LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER. MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
4. INSTALL SHUNTS AS SHOWN ON ASSY DRAWING.
5. DEPANELIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
6. DO NOT APPLY ANY KIND OF ASSEMBLY STAMP OR QA STAMP TO ANY BOARD.

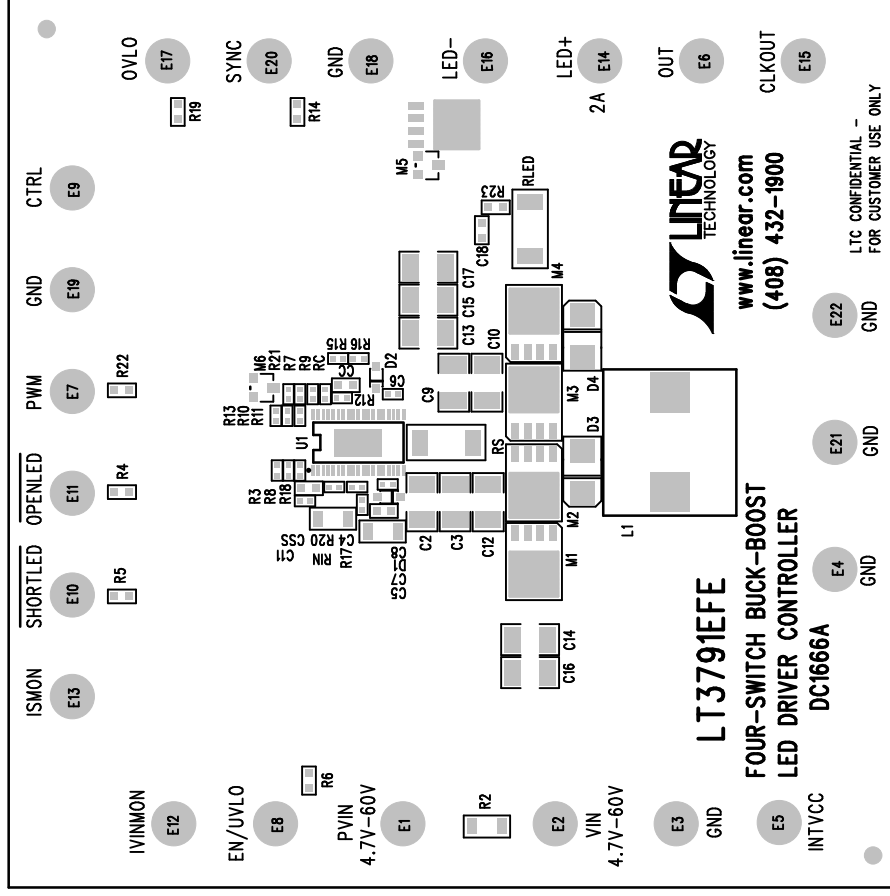

APPROVALS		<div>1630 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)432-1800 WWW.LINEAR.COM LTC CONFIDENTIAL - FOR CUSTOMER USE ONLY</div>			
PCB DES.	HZ	TITLE: TOP ASSEMBLY DRAWING FOUR-SWITCH BUCK-BOOST LED DRIVER CONTROLLER			
APP ENG.	KEITH S.				
		SIZE	IC NO.	LT3791EFE	REV.
		N/A		DC1666A	3
SCALE = NONE		FILENAME: DC1666A-3.PCB			
		SHT 1 OF 1			