

## LTM4661 1.8V-5.5V Input, Synchronous Step-Up $\mu$ Module Regulator

### DESCRIPTION

Demonstration circuit 2569A is ultrathin step-up  $\mu$ Module regulator featuring the [LTM4661](#). The DC2569A operates over 1.8V to 5.5V input and it generates 12V, 1A output from 5V input. Also, the LTM4661 has precision voltage reference, which can generate output voltage with 3% tolerance over the full operating conditions. The 1MHz switching frequency operation results in small and efficient circuit. The converter operates with only one phase in burst mode and achieves over 90% efficiency with

100mA load. The demonstration circuit can be easily modified to generate different output voltages.

The DC2569 has small circuit footprint. It is a high performance and cost effective solution for generating output voltages up to 15V from inputs as low as 1.8V.


**Design files for this circuit board are available at <http://www.linear.com/demo/DC2569A>**

All registered trademarks and trademarks are the property of their respective owners.

### PERFORMANCE SUMMARY Specifications are at $T_A = 25^\circ\text{C}$

PARAMETER	CONDITIONS	VALUE
Minimum Input Voltage	$I_{OUT} = 0\text{A to } 0.3\text{A}$	1.8V
Maximum Input Voltage	$I_{OUT} = 0\text{A to } 1\text{A}$	5.5V
$V_{OUT}$	$V_{IN} = 1.8\text{V to } 5.5\text{V}, I_{OUT} = 0\text{A}$	12V $\pm 3\%$
Output Voltage Ripple	$V_{IN} = 5\text{V}, I_{OUT} = 1\text{A}$	20mV <sub>p-p</sub>
Nominal Switching Frequency		1MHz

### BOARD PHOTO

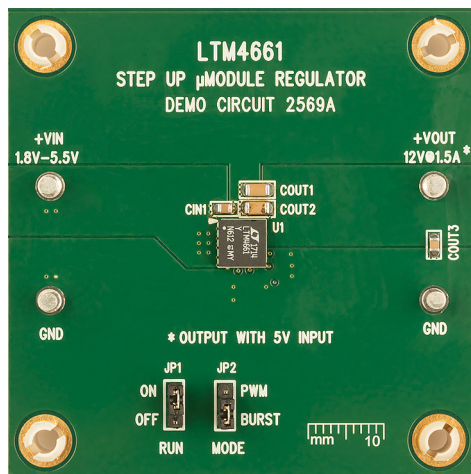

## QUICK START PROCEDURE

Demonstration circuit DC2569 is easy to set up to evaluate the performance of the LTM4661. For proper measurement equipment setup refer to Figure 1 and follow the procedure below:

NOTE: When measuring the input or output voltage ripple, care must be taken to minimize the length of oscilloscope probe ground lead. Measure the input or output voltage ripple by connecting the probe tip directly across the  $V_{IN}$  or  $V_{OUT}$  and GND terminals as shown in Figure 2.

1. With power off, connect the input power supply to  $V_{IN}$  and GND.
2. Keep the load set to 0A or disconnected.

3. Turn the input power source on and slowly increase the input voltage. Be careful not to exceed 5.5V.

NOTE: Make sure that the input voltage  $V_{IN}$  does not exceed 5.5V.

4. Set the input voltage to 5V and check for the proper output voltage of 12V. If there is no output, temporarily disconnect the load to make sure that the load is not set too high.
5. Once the proper output voltage is established, adjust the load and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

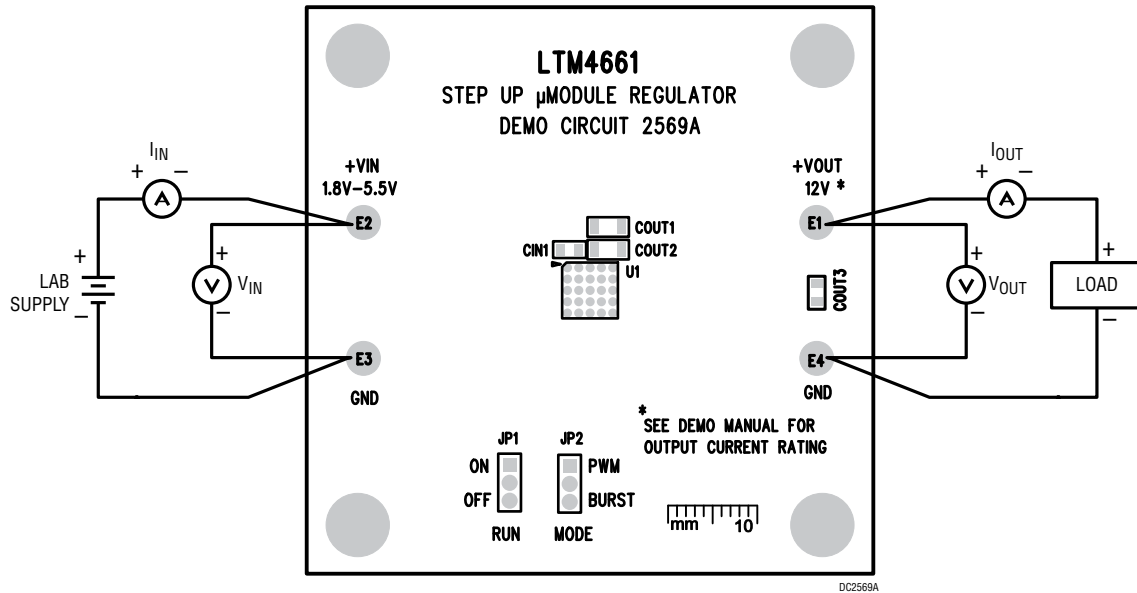


Figure 1. Proper Measurement Equipment Setup

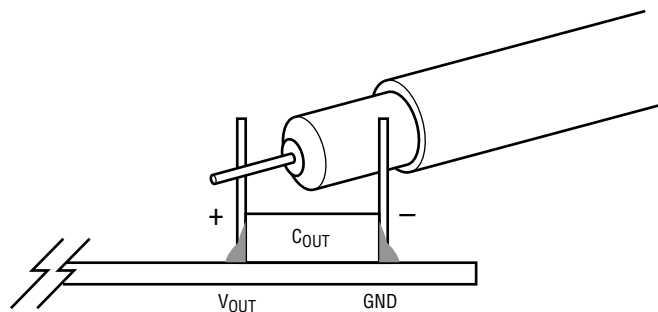


Figure 2. Measuring Input or Output Ripple

## QUICK START PROCEDURE

### CHANGING THE OUTPUT VOLTAGE

To change the output voltage from the programmed 12V, change the voltage setting resistors connected to LTM4661 FB pin (see the schematic on page 5).

### CONVERTER OUTPUT CURRENT

The DC2569 output current capability depends on the input voltage and programmed input current limit. Typical performance of DC2569A is shown in Figure 3. As can be seen from Figure 3, the maximum output current is 1A with 5V input. Switching the mode of operation to BURST mode can increase the efficiency at light loads.

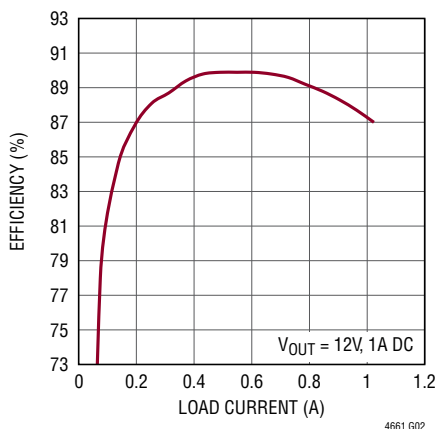


Figure 3. The 5V Input Efficiency is 90% at 0.6A Load

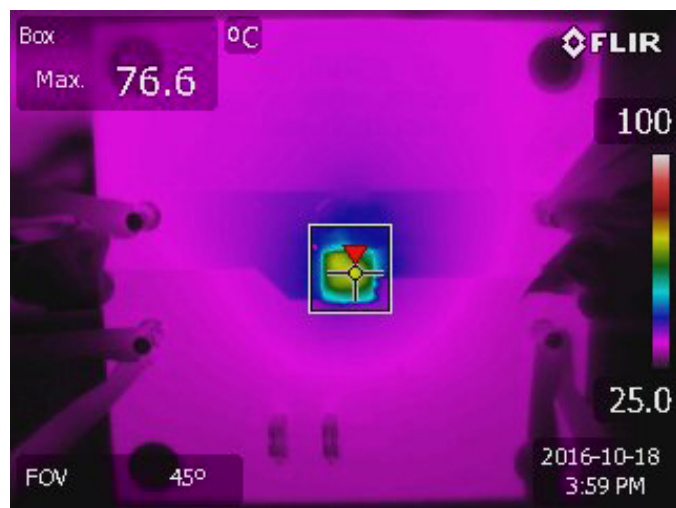


Figure 4. Thermal Image, 3.3V Input to 12V Output at 0.8A, 200LFM Air Flow, No Heat Sink

### OUTPUT LOAD STEP RESPONSE

The load step response of DC2569A is dependent on the amount and type of output caps used. If higher load steps need to be handled more output capacitance can be added in order to keep the voltage transients at the desired level. The 200mA to 400mA load step transients with 3.3V input are shown in Figure 5. Other types of low ESR and high value capacitors can be used if space is available to reduce load transients to desired level.

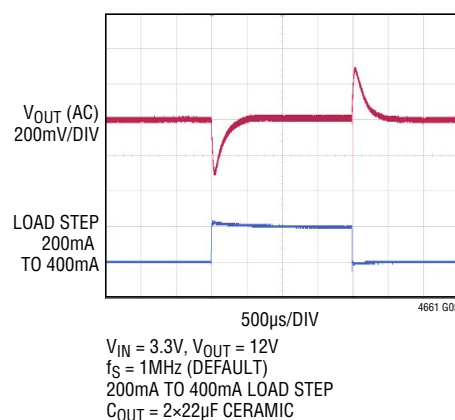


Figure 5. The LTM4661 Has Good Load Step Response with Small Output Capacitors (2x 22µF)


### START-UP AND SOFT-START FUNCTION

The DC2569 features internal soft-start circuit that ramps the output voltage up in monotonic fashion. The soft-start circuit also prevents output voltage overshoot when output voltage ramp reaches regulation.

## QUICK START PROCEDURE

### OUTPUT SHORT CIRCUIT PROTECTION

The LTM4661 features safe short-circuit and thermal protection. The part can operate continuously with output shorted while maintaining a maximum set current limit. The internal peak switch current is reduced during overload to about 2A and is restored to 3.5A once the output exceeds 1.5V.

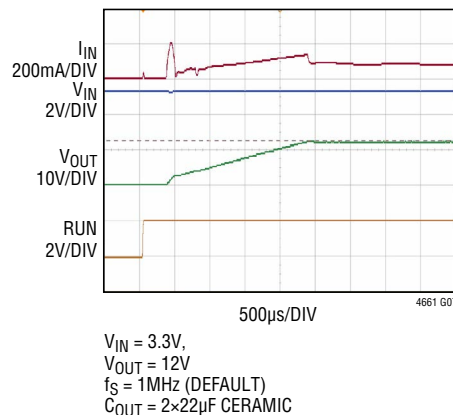

**Figure 6. The DC2569 Ramps the Output Slowly at Start-Up without Output Voltage Overshoot**

## PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
<b>Required Circuit Components</b>				
1	1	CIN1	CAP, 10 $\mu$ F, X5R, 16V, 20%, 0805	AVX, 0805YD106MAT2A KEMET, C0805C106M4PAC7800 KEMET, C0805C106M4PACTU
2	1	COU1, COU2	CAP, 22 $\mu$ F, X5R, 16V, 20%, 1206	MURATA, GRM31CR61C226ME15L
3	1	COU3	CAP, 1 $\mu$ F, X5R, 25V, 10%, 0805	AVX, 08053D105KAT2A
4	2	R1, R6	RES., 1M $\Omega$ , 1%, 1/10W, 0603	NIC, NRC06F1004TRF PANASONIC, ERJ3EKF1004V VISHAY, CRCW06031M00FKEA
5	1	R5	RES., 11k, 1%, 1/10W, 0603	VISHAY, CRCW060311K0FKEA
6	1	U1	IC, Step-Up DC/DC Power Module, LGA-25	LINEAR TECHNOLOGY, LTM4661EV#PBF
<b>Additional Demo Board Circuit Components</b>				
1	0	C1, C2, C3	CAP, 0603, OPTION	OPT
2	0	R2, R3, R4	RES., OPTION, 0603	OPT



# DEMO MANUAL DC2569A

---

## DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

**Please read the DEMO BOARD manual prior to handling the product.** Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology  
1630 McCarthy Blvd.  
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation