



SIZE	QTY	SYM	PLTD
15	8	+	PLTD
95	6	X	PLTD
35	6	□	PLTD
70	2	◇	NPLTD

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4. 2 OZ. COPPER THICKNESS .062 +/- .006 TOTAL OF 2 LAYERS. FLAMABILITY RATING: 94 V-0 MINIMUM .
3. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING. HOLE LOCATION TOLERANCES ARE +/- .003 INCH IN RELATION TO CENTER
4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR GREEN.
5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
7. SCORING:

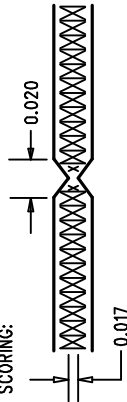

FAB DRAWING

APPROVALS					1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
	INIT	DATE				
DRAWN						
CHECK						
DESIGN	JUNE WU	8/2/00	TITLE:			
ENGR	TOM G.	8/2/00	High Efficient, SOT-23 Synchronous Buck Regulator			
			SIZE	DEMO	REV.	A
			A		DC422A	
SCALE = NONE			DES-230445		SHT 1 of 1	