450A_R0.pcb - Tue Mar 05 11:56:15 2002

REVISIONS			
REV		APPR	DATE

Demo Board 450 RevA

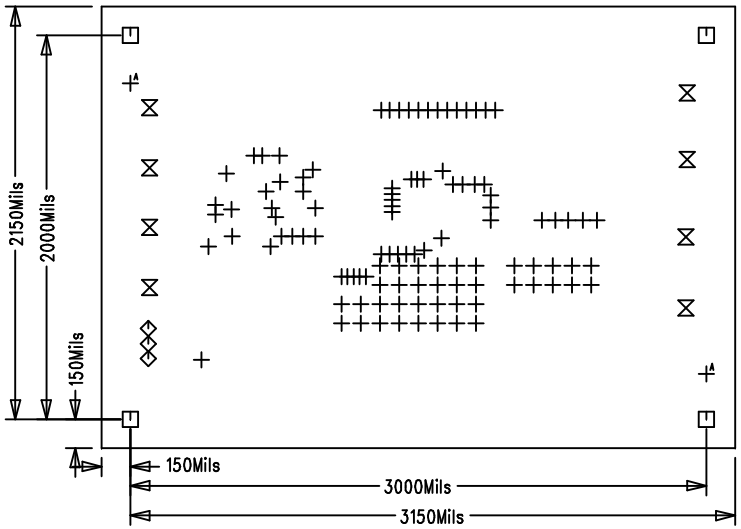

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4. 2 OZ. COPPER THICKNESS .062 +/-.006 TOTAL OF 4 LAYERS. FLAMABILITY RATING: 94 V-O MINIMUM .
3. DRILLLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING. HOLE LOCATION TOLERANCES ARE +/-.003 INCH IN RELATION TO CENTER
4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR GREEN.
5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
7. SCORING:

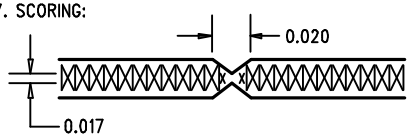

8. LAYER DEFINITION:



SIZE	QTY	SYM	PLTD
10	107	+	PLTD
125	4	□	PLTD
31	3	◇	PLTD
63	8	⧖	PLTD
70	2	A	NPLTD

Fabrication Drawing

APPROVALS		
	INIT	DATE
DRAWN		
CHECK		
DESIGN	Rudy B.	
ENGR	Wei Chen	
SCALE = NONE		

LINEAR TECHNOLOGY
1630 McCarthy Blvd.
Milpitas, CA 95035
PH: (408)432-1900

TITLE: DDR,HSTL,STTL Termination Power Supply

SIZE		REV.
NONE	Demo Board 450	A
DESIGN #230475		SHT 1 of 1