

# Evaluating the ADG1736, 2.4Ω Dual SPDT Switch

### **FEATURES**

- ▶ ±1.08V to ±2.75V dual supply
- ▶ +1.08V to +5.5V single supply
- Low on resistance, 2.4Ω
- ▶ 16-lead, 2mm × 2mm LGA package
- ▶ 1.8V JEDEC compliant logic
- Fully specified at +5V, +3.3V, +1.8V, and ±2.5V
- ▶ Rail-to-rail signal range

## **EVALUATION KIT CONTENTS**

▶ EVAL-ADG1736ARDZ evaluation board

### **DOCUMENTS NEEDED**

► ADG1736 data sheet

#### **EQUIPMENT NEEDED**

- ▶ DC voltage source
  - ▶ ±2.5V for dual-supply
  - ▶ +5V for single-supply
- Optional digital logic supply
- Analog signal source
- Method to measure voltage, such as a digital multimeter (DMM) or oscilloscope

## **GENERAL DESCRIPTION**

The EVAL-ADG1736ARDZ is the evaluation board for the ADG1736. The ADG1736 is an analog multiplexer containing two independently selectable single-pole, double throw (SPDT) switches and operates with a low-voltage single supply range from  $\pm 1.08V$  to  $\pm 2.75V$ . An EN input is used to disable all of the switches.

The ADG1736 is designed for small size without compromising on performance. The 2mm × 2mm LGA package is ideal for a broad range of applications where area is a concern.

The ADG1736 has a low on resistance of just  $2.4\Omega$  and a rail-to-rail input signal range. Each switch conducts equally well in both directions when on. The switches are turned on with a Logic 1 input on the corresponding digital control line, and the digital control inputs are 1.8V JEDEC compliant for ease of use with microcontrollers and field programmable gate arrays (FPGAs).

Figure 1 shows the EVAL-ADG1736ARDZ evaluation board. The ADG1736 is located in the center of the evaluation board. Wire screw terminals are provided to connect to each of the source and drain pins as well as optional Subminiature Version A (SMA) connectors. There are multiple power options on the board for providing power supplies to the evaluation board. A four terminal screw connector can be used to provide  $V_{DD},\,V_{SS},\,GND,\,$  and  $V_{L}$  connections directly to the ADG1736 from an external power supply. Alternatively, on board 3.3V and 1.8V voltage regulators are supplied to provide options for  $V_{DD}$  and  $V_{L}$ . The on-board voltage regulators can be powered from one of three options, the external 5V supply via the screw terminal, from the 5V USB Type-C connector on the evaluation board, or using an available 5V supply from a connected SDP-K1 or compatible Arduino board.

Full specifications on the ADG1736 are available in the ADG1736 data sheet available from Analog Devices, Inc., and must be consulted with this user guide when using the EVAL-ADG1736ARDZ evaluation board.

## **TABLE OF CONTENTS**

Features1	Power Supplies4
Evaluation Kit Contents1	Input Signals4
Documents Needed1	Link Options4
Equipment Needed1	Digital Interface Options4
General Description1	Evaluation Board Schematics and Artwork 5
EVAL-ADG1736ARDZ Evaluation Board	
Layout3	Bill of Materials9
Evaluation Board Hardware4	Notes10

# **REVISION HISTORY**

9/2025—Revision 0: Initial Version

analog.com Rev. 0 | 2 of 10

# **EVAL-ADG1736ARDZ EVALUATION BOARD LAYOUT**




Figure 1. Evaluation Board Layout

analog.com Rev. 0 | 3 of 10

## **EVALUATION BOARD HARDWARE**

### **POWER SUPPLIES**

For ease of use, a USB Type-C connector (P27) is supplied on the evaluation board. This connector can be used to supply 5V directly to the ADG1736 for a single supply. The 5V USB connection also powers both voltage regulators providing options to power the ADG1736 with a single 3.3V supply or a single 1.8V supply. The power supply can be configured using the on board jumpers listed in Table 1. To power the ADG1736 with specific power supply voltages or dual supply voltages the screw terminal P6 can be used to provide supply voltages from an external voltage source. For dual-supply voltages, the EVAL-ADG1736ARDZ evaluation board can be powered from ±1.08V to ±2.75V. For single-supply voltages,  $V_{DD}$  between 1.08V to 5.5V, the  $V_{SS}$  terminal must be connected to GND. Alternatively, the jumper JP1 can be configured to Position B to allow the evaluation board to be powered from a connected compatible SDP-K1 or Arduino board. Similarly, the digital logic voltage supply, V<sub>I</sub>, can be powered from either the 3.3V regulator, the 1.8V regulator, an external voltage via the screw terminal, or from the VIO pin of a compatible Arduino board. Additionally, JP5 is used in order to select which functionality of the V<sub>I</sub>/EN pin on the ADG1736 is in use.

### INPUT SIGNALS

Screw connectors are provided to connect to both the source pins (S1A, S1B, S2A, and S2B) and the drain pins (D1 and D2) of the ADG1736. Additional SMA connectors are available to connect cables to the source and drain pins.

Each trace on the source and drain side includes two sets of 0603 pads that can place a load on the signal path to ground. A  $0\Omega$  resistor is placed in the signal path and can be replaced with a user-defined value. The resistor combined with the 0603 pads can create a simple RC filter.

#### LINK OPTIONS

Several link options are provided on the EVAL-ADG1736ARDZ evaluation board. The functions of these link options are described in Table 1.

Table 1. Link Options

Link Number	Options		
JP1	A = Connect VDD to EXT_VDD and USB connector P27	B = Connect VDD to Arduino 5V	
JP2	A = Connect IN1 to VL	B = Connect IN1 to GND	
JP3	A = Connect IN2 to VL	B = Connect IN2 to GND	
JP4	A = Connect EN to VL	B = Connect EN to GND	
JP5	A = Connect VL to VL/EN	B = Connect EN to VL/EN	
P11	Inserted = Connect IN1 to DIGIO1	Removed = Disconnect IN1 from DIGIO1	
P12	Inserted = Connect IN2 to DIGIO2	Removed = Disconnect IN2 from DIGIO2	
P13	Inserted = Connect EN to DIGIO3	Removed = Disconnect EN from DIGIO3	
P21	Inserted = Connect VL to 3.3V	Removed = Disconnect VL from 3.3V	
P22	Inserted = Connect VL to 1.8V	Removed = Disconnect VL from 1.8V	
P23	Inserted = Connect VL to EXT VL	Removed = Disconnect VL from EXT_VL	
P8	Inserted = Connect VL to VIO	Removed = Disconnect VL from VIO	
P17	Inserted = Connect POS SUPPLY to 3.3V	Removed = Disconnect POS SUPPLY from 3.3V	
P18	Inserted = Connect POS SUPPLY to 1.8V	Removed = Disconnect POS SUPPLY from 1.8V	
P19	Inserted = Connect POS_SUPPLY to VDD	Removed = Disconnect POS_SUPPLY from VDD	
P25	Inserted = Connect NEG_SUPPLY to GND	Removed = Disconnect NEG_SUPPLY from GND	
P26	Inserted = Connect NEG_SUPPLY to VSS	Removed = Disconnect NEG_SUPPLY from VSS	

## **DIGITAL INTERFACE OPTIONS**

The digital interface of the ADG1736 can either be controlled manually using the IN1, IN2, and EN link headers or accessed by using the corresponding SMA connectors. To use the SMA connectors, remove the IN1, IN2, and EN link headers.

The connecters P5 can also be used with a controller board such as the SDP-K1 or Arduino. If a controller board is used to control the ADG1736, remove the IN1, IN2, and EN link header and insert the P11, P12, and P13 link headers.

analog.com Rev. 0 | 4 of 10

# **EVALUATION BOARD SCHEMATICS AND ARTWORK**

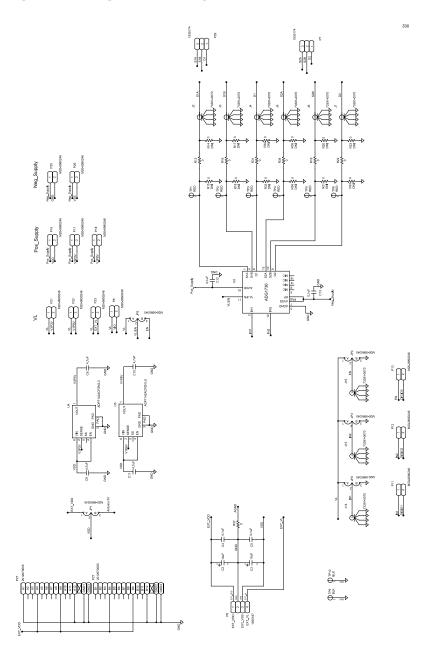

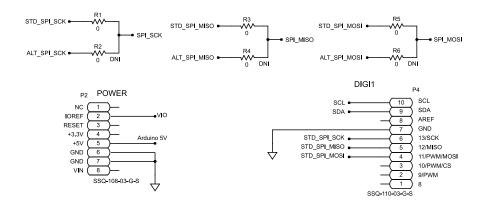


Figure 2. EVAL-ADG1736ARDZ Schematic Part 1

analog.com Rev. 0 | 5 of 10

## **EVALUATION BOARD SCHEMATICS AND ARTWORK**





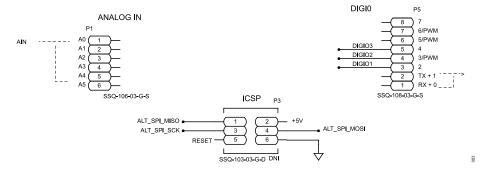


Figure 3. EVAL-ADG1736ARDZ Schematic Part 2

analog.com Rev. 0 | 6 of 10

# **EVALUATION BOARD SCHEMATICS AND ARTWORK**




Figure 4. EVAL-ADG1736ARDZ Top Layer




Figure 5. EVAL-ADG1736ARDZ Bottom Layer

analog.com Rev. 0 | 7 of 10

# **EVALUATION BOARD SCHEMATICS AND ARTWORK**




Figure 6. EVAL-ADG1736ARDZ Silkscreen

analog.com Rev. 0 | 8 of 10

## **ORDERING INFORMATION**

## **BILL OF MATERIALS**

## Table 2. Bill of Materials

Reference Designator	Description	Manufacturer	Part Number
C1	Ceramic capacitor, 0.1µF, 16V, 10%, X7R, 0402, AEC-Q200	Murata	GCM155R71C104KA55D
28, C9, C10, C11	Ceramic capacitors, 4.7µF , 50V, 10%, X7R, 0805	Murata	GRM21BZ71H475KE15L
4, C5, C12, C13	Ceramic capacitors, 0.1µF, 50V, 10%, X7R, 0603	Samsung	CL10B104KB8NNNC
2, C3	Tantalum capacitors, 10 $\mu$ F, 50V, 20%, 7343-31, 0.8 $\Omega$	AVX	TAJD106M050RNJ
2, J3, J4, J5, J6, J7, J14, J15, J16	Connectors, printed circuit board (PCB), SMA, straight jack, 50Ω	Molex	73391-0070
P1, JP2, JP3, JP4	Connectors, PCB, 3-position, male header, unshrouded, single row, 2.54mm pitch, 3mm solder tail	Harwin	M20-9990345
1	Connector, PCB, receptacle, 25mil, square post, 2.54mm pitch	Samtec	SSQ-106-03-G-S
8, P11, P12, P13, P17, P18, P19, P21, P22, P23, P25, P26	Connectors, PCB, header, 1-row, 2-way	Harwin	M20-9990246
2,P5	Connectors, PCB, receptacle, 25mil, square post, 2.54mm pitch	Samtec	SSQ-108-03-G-S
27	Connector, PCB, 24-position, USB 3.1- Type C, female 0.25mm/0.5mm, rosin surface mount device (SMD)	Molex	2012670005
77, P29	Connectors, PCB, 3-position, terminal block, 5mm pitch	Phoenix Contact	1935174
6	Connectors, PCB, 4-position, terminal block, 5mm pitch	Phoenix Contact	1935187
4	Connector, PCB, receptacle, 25mil square post, 2.54mm pitch	Samtec	SSQ-110-03-G-S
11, R3,R5	Resistors, SMD, $0\Omega$ , jumper, 1/10W, 0603, AEC-Q200	Panasonic	ERJ-3GEY0R00V
88, R9, R12	Resistors, SMD, 100KΩ, 1%, 1/16W, 0603	Multicomp (SPC)	MC 0.063W 0603 1% 100K
213, R16, R19, R22, R31, R34, R37	Resistors, SMD, $0\Omega$ jumper, 1/3W, 0603, AEC-Q200	Vishay	CRCW06030000Z0EAHP
P1, TP2, TP3, TP4, TP5, TP6, TP9	Connectors, PCB, red test point	Keystone Electronics	5000
P10	Connector, PCB, black test point	Keystone Electronics	5001
11	IC 32KBIT serial electronically erasable programmable read-only memory (EEPROM)	Microchip Technology	24AA32A-I/SN
J2	IC, low voltage 2.4Ω quad SPST switch	Analog Devices, Inc.	ADG1736
14	IC, 40V, 200mA, low noise, CMOS LDO linear regulator, 3.3 VOUT	Analog Devices	ADP7142ACPZN3.3-R7
J5	IC 40V, 200mA, low noise, CMOS LDO linear regulator, 1.8 VOUT	Analog Devices	ADP7142ACPZN1.8-R7

analog.com Rev. 0 | 9 of 10

### ORDERING INFORMATION

### **NOTES**



#### ESD Caution

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

#### **Legal Terms and Conditions**

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Analog Way, Wilmington, MA 01887-2356, U.S.A. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NONINFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL. SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed. All Analog Devices products contained herein are subject to release and availability.

