

Evaluating the ADXL366 Ultra-Low Power, $\pm 2g/\pm 4g/\pm 8g$ Digital Accelerometer Breakout Board

FEATURES

- Simply attached to the prototyping board or PCB via two sets of 5-pin headers
- Small size and board stiffness minimizes impact on the system and acceleration measurements

EQUIPMENT NEEDED

- External host processor

DOCUMENTS NEEDED

- [ADXL366](#) data sheet

EVALUATION BOARD PHOTOGRAPH

GENERAL DESCRIPTION

The EVAL-ADXL366Z is a simple evaluation board that allows quick evaluation of the performance of the ADXL366 ultra-low power, 3-axis, digital output, microelectronic mechanical system (MEMS) accelerometer. The evaluation board comes with a set of two 5-pin headers (not installed) and provides access to all ADXL366 communication and interrupt pins. The EVAL-ADXL366Z also comes with a set of four mounting holes that are compatible with the [EVAL-XLMOUNT1](#), which is an aluminum block with a central mounting hole.

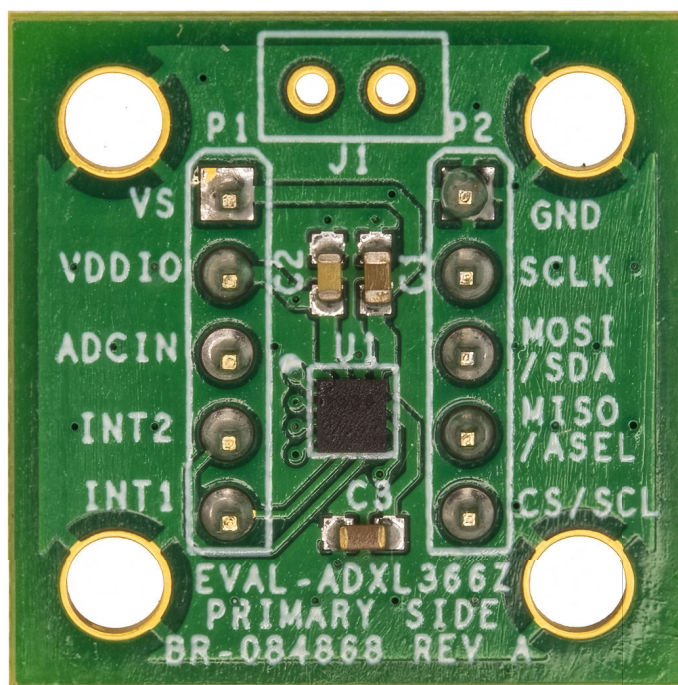


Figure 1. EVAL-ADXL366Z Evaluation Board

TABLE OF CONTENTS

Features.....	1	Circuit Description.....	3
Equipment Needed.....	1	Handling Considerations.....	3
Documents Needed.....	1	Evaluation Board Schematic.....	4
General Description.....	1	Ordering Information.....	5
Evaluation Board Photograph.....	1	Bill of Materials.....	5
Evaluation Board Hardware.....	3		

REVISION HISTORY

4/2025—Revision 0: Initial Version

EVALUATION BOARD HARDWARE

The EVAL-ADXL366Z has two sets of 5-pin headers, with a 0.1in pitch, that provides access to all power and signal lines. The headers allow the evaluation board to be attached either to a prototyping board (breadboard) or to a printed circuit board (PCB) in an existing system. Four holes are provided in the corners of the board for mechanical attachment of the EVAL-ADXL366Z to an application. An external host processor is required for communication with the [ADXL366](#).

The dimensions of the EVAL-ADXL366Z are 20mm × 20mm. The four mounting holes are set 15mm × 15mm at the corners of the PCB.

CIRCUIT DESCRIPTION

The PCB layout of the EVAL-ADXL366Z is shown in [Figure 1](#). The EVAL-ADXL366Z is equipped with three factory installed ceramic capacitors: C1 = 1μF, C2 = 0.1μF, and C3 = 0.22μF. C1 and C2

are meant for decoupling the accelerometer from the noise on the power supply, and C3 is used for internal supply stability.

The schematic of the EVAL-ADXL366Z is shown in [Figure 2](#). See the ADXL366 data sheet for information on configuring the accelerometer following its connection to the application host processor.

HANDLING CONSIDERATIONS

The EVAL-ADXL366Z is not reverse polarity protected. Reversing the V_S or V_{DDIO} supply and GND pins can cause damage to the ADXL366.

Dropping the EVAL-ADXL366Z on a hard surface can generate several thousand g of acceleration, which may exceed the data sheet absolute maximum limits. See the ADXL366 data sheet for more information.

EVALUATION BOARD SCHEMATIC

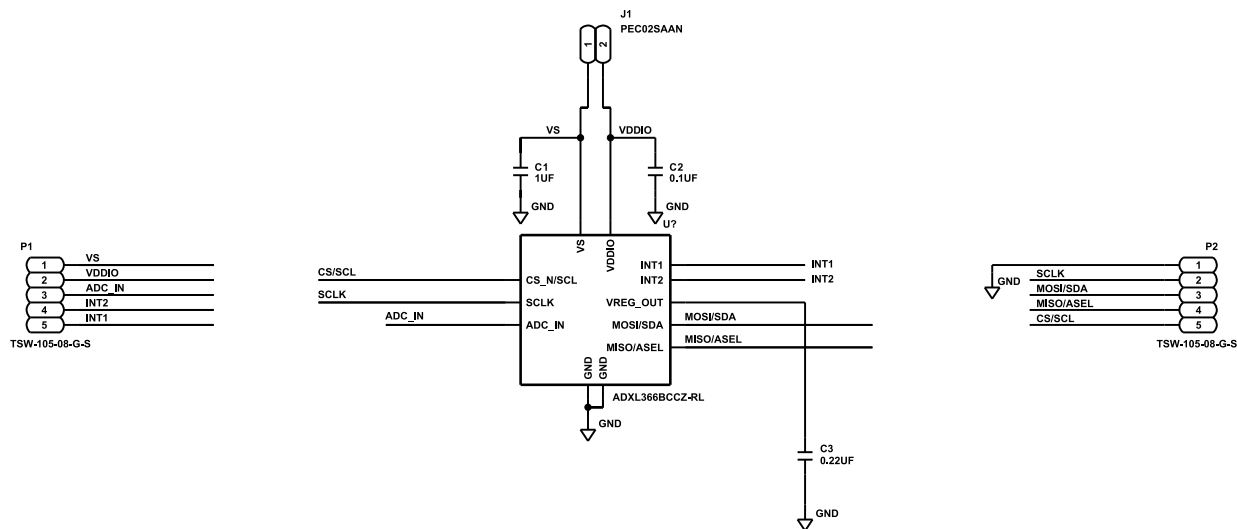


Figure 2. EVAL-ADXL366Z Evaluation Board Schematic


002

ORDERING INFORMATION

BILL OF MATERIALS

Table 1. Bill of Materials

Item	Quantity	Reference Designator	Description	Manufacturer	Part Number
1	1	U1	Micropower 3-Axis, ±2g/±4g/±6g, digital output, MEMs accelerometer	Analog Devices, Inc.	ADXL366BCCZ-RL
2	1	C1	1µF ceramic capacitor, 50V, 10%, X7R, 0603	Taiyo Yuden	UMK107AB7105KA-T
3	1	C2	0.1µF ceramic capacitor, 50V, 10%, X7R, 0603	YAGEO	CC0603KRX7R9BB104
4	1	C3	0.22µF ceramic capacitor, 50V, 10%, X7R, 0603	Murata	GCM188R71H224KA64D
5	2	P1, P2	Connector headers, through hole, 5 position, 0.100" (2.54mm)	Samtec, Inc.	TSW-105-08-G-S



ESD Caution
ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed. All Analog Devices products contained herein are subject to release and availability.

