

FAB Drawing


SIZE	QTY	SYM	PLTD
95	6	+	PLTD
35	21	X	PLTD
15	121	□	PLTD
187	4	◇	PLTD
70	2	⊗	NPLTD
65	7	⊗	PLTD

FAB DRAWING

REVISIONS		
REV	DESCRIPTION	DATE

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
2 OZ. COPPER FINISHED ON OUTER LAYERS.
1 OZ. COPPER FINISHED ON INNER LAYERS.
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. SIZE: DIMENSIONS AND TOLERANCES SHOWN.
0.00 ARE PRIMARY DATUMS.
4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER. .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/- .003 INCH IN RELATION TO CENTER
5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.
SILVER IMMERSON FINISH BOTH SIDES.
6. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
7. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
8. SCORING:

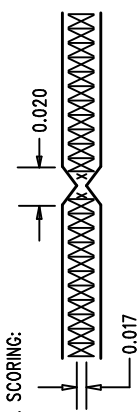

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON ANGLE ±1
2 PLACE ±.01 3 PLACE ±.005
INTERPRET DIM AND TOL
PER ASME Y14.5M - 1994



1630 McCarthy Blvd.
Milpitas, CA 95035
PH: (408)432-1900

TITLE: LTC3828EUH, Dual Output Step-Down DC/DC
with Tracking

SIZE	DEM	DC802A	REV.
A	A	A	A

DES-230700 SHT 1 of 1