

SIZE	QTY	SYM	PLTD
95	9	+	PLTD
35	12	X	PLTD
10	31	□	PLTD
70	2	◇	NPLTD

NOTES : Unless Otherwise Specified


1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
2 OZ. COPPER FINISHED ON OUTER LAYERS.
1 OZ. COPPER FINISHED ON INNER LAYERS.
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. SIZE: DIMENSIONS AND TOLERANCES SHOWN.
0.000 ARE PRIMARY DATUMS.
4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH
HOLES WITH COPPER. .001 INCH THICK MIN. ALL
HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/- .003
INCH IN RELATION TO CENTER
5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.

SILVER IMMERSION BOTH SIDES.

6. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.

7. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.

8. SCORING:

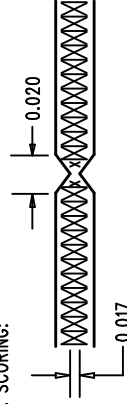

FAB DRAWING

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON ANGLE ±1
2 PLACE ±.01 3 PLACE ±.005
INTERPRET DIM AND TOL
PER ASME Y14.5M - 1994

APPROVALS

DRAWN	INIT	DATE
CHECK		
DESIGN	JUNE WU	4/12/05
ENGR	Tom Gross	4/12/05
SCALE = NONE		



TITLE: LTC3446EDE, Triple Output Regulator

SIZE	DEM	DC893A	REV.	A
DES-				SHT 1 of 1