

REVISIONS			
REV	DESCRIPTION	APPR	DATE



NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.  
2 OZ. COPPER FINISHED ON OUTER LAYERS.  
1 OZ. COPPER FINISHED ON INNER LAYERS.  
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.  
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. SIZE: DIMENSIONS AND TOLERANCES SHOWN.  
0.00 ARE PRIMARY DATUMS.
4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER. .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.  
HOLE LOCATION TOLERANCES ARE +/- .003 INCH IN RELATION TO CENTER

SILVER IMMERSION BOTH SIDES.

6. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
7. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.

8. SCORING:

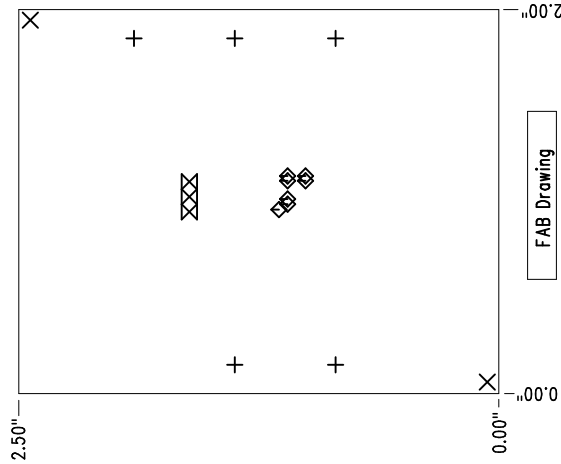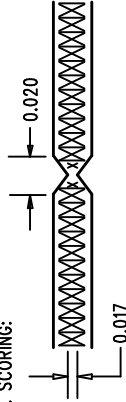

SIZE	QTY	SYM	PLTD
95	5	+	PLTD
70	2	X	NPLTD
10	7	◇	PLTD
30	3	⊗	PLTD

FAB DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON ANGLE ±1 2 PLACE ±.01 3 PLACE ±.005 INTERPRET DIM AND TOL PER ASME Y14.5M - 1994		APPROVALS		LINEAR TECHNOLOGY 1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
		DRAWN	INIT	DATE	TITLE: LTC3204BEDC, Low Noise Regulated Charge Pump in 2x2 DFN
CHECK	JUNE WU	4/18/05	SIZE	A	REV. A
ENGR	Walker Bai	4/18/05	DC916A	DES-230	SHT 1 of 1