DC943A.PCB - Mon Mar 26 09:35:51 2007

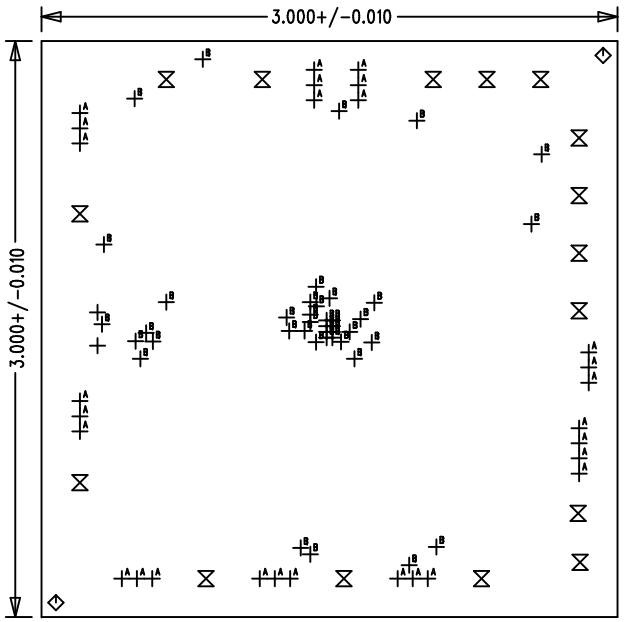

Top Side

SIZE	QTY	SYM	PLTD	TOL
0.07	2	◇	NO	+/-0.003
0.095	16	⧖	YES	+/-0.003
0.035	28	┼A	YES	+/-0.003
0.01	41	┼B	YES	+/-0.003
0.035	2	┼	NO	+/-0.003

REVISIONS			
REV	DESCRIPTION	APPR	DATE

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
   2 OZ. COPPER FINISHED ON OUTER LAYERS.
   1 OZ. COPPER FINISHED ON INNER LAYERS.
   THICKNESS .062 +/-.006 TOTAL OF 4 LAYERS.
   FLAMABILITY RATING: 94 V-0 MINIMUM .
3. SIZE: DIMENSIONS AND TOLERANCES SHOWN.
   0.000 ARE PRIMARY DATUMS.
4. DRILLLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
   HOLE LOCATION TOLERANCES ARE +/-.003 INCH IN RELATION TO CENTER
5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.
   IMMERSION SILVER SOLDER PLATING.
6. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
7. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
8. SCORING:



Fabrication Drawing

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON ANGLE ± 1
2 PLACE ± .01 3 PLACE ± .005
INTERPRET DIM AND TOL
PER ASME Y14.5M - 1994

APPROVALS		
	INIT	DATE
DRAWN		
CHECK		
DESIGN	Helen Zhu	12/08/06
ENGR	Tage B.	12/08/06
SCALE = NONE		

LINEAR TECHNOLOGY
1630 McCarthy Blvd.
Milpitas, CA 95035
PH: (408)432-1900

TITLE: LTC4067EDE
USB Power Manager and Battery Charger

SIZE	DEMO	REV.
A	DC943A	A

DES-250 | SHT 1 of 1