
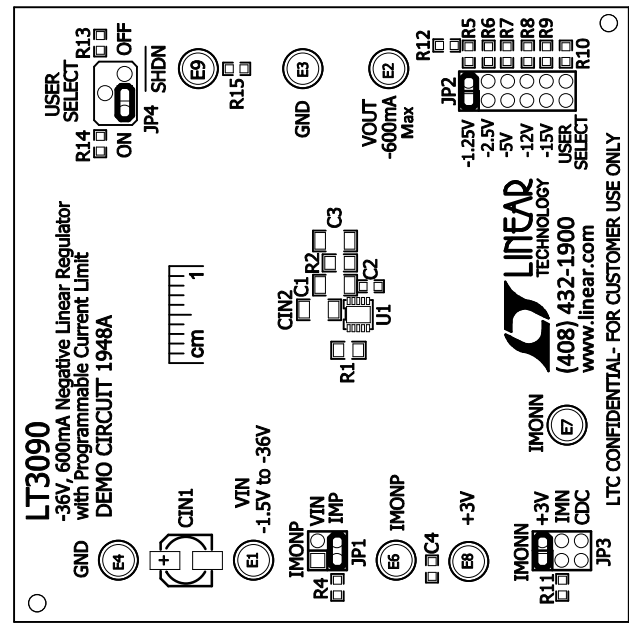



REVISION HISTORY			
ECO	REV	DESCRIPTION	APPR
—	2	PRODUCTION	EDWIN LI
			Sep 11, 2013

NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
2. ASSEMBLY PROCESS SHALL INCLUDE: REFLOW SOLDER TOP SIDE SMD. MAXIMUM SOLDER TEMPERATURE IS 240 deg C.
3. PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS. LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER. MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
4. INSTALL SHUNT AS SHOWN ON ASSY DRAWING.
5. DEANELIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
6. DO NOT APPLY ANY KIND OF ASSEMBLY STAMP OR QA STAMP TO ANY BOARD.

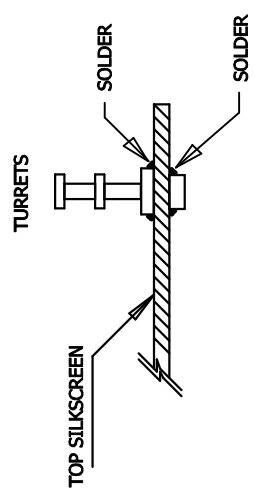

APPROVALS		 LINEAR TECHNOLOGY		1830 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)432-1900 www.linear.com LTC CONFIDENTIAL- FOR CUSTOMER USE ONLY	
PCB DES.	RB				
APP ENG.	EDWIN LI				
		TITLE: TOP ASSEMBLY DRAWING			
		-36V, 600mA Negative Linear Regulator with Programmable Current Limit			
		SIZE	IC NO.	LT3090EDD	REV.
		N/A	DEMO CIRCUIT 1948A		2
SCALE = NONE		FILENAME: 1948A-Rev2.PCB			SHT 1 OF 1