


REVISION HISTORY				
ECO	REV	DESCRIPTION	APP. ENG.	DATE
-	1	PRODUCTION	CUYLER L.	06-02-14

## NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
2. ASSEMBLY PROCESS SHALL INCLUDE: REFLOW SOLDER BOTH SIDE SMD. MAXIMUM SOLDER TEMPERATURE IS 240 DEGREES CELSIUS.
3. PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS. LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER. MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
4. INSTALL SHUNTS AS SHOWN
5. DEPANLIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
6. DO NOT APPLY ANY KIND OF ASSEMBLY STAMP OR QA STAMP TO ANY BOARD.

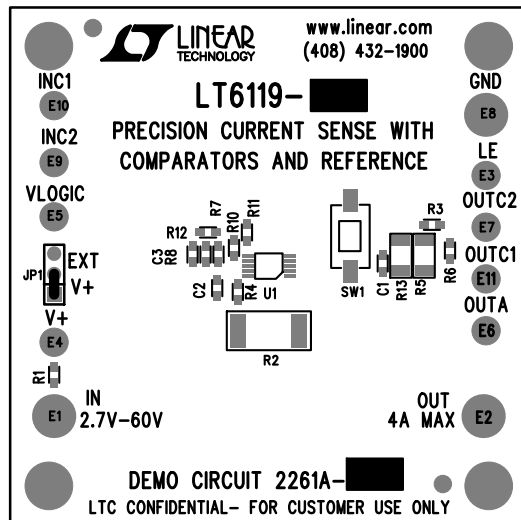

TOP SILKSCREEN


LINEAR TECHNOLOGY DATE: 06-02-14

DC2261A-1 LT6119IMS

PRECISION CURRENT SENSE WITH  
COMPARATOR AND REFERENCE

7. MARK EACH LTC PART NUMBER AND ASSEMBLY TYPE WITH BLACK PERMANENT MARKER AS SHOWN IN TABLE BELOW:

ASSY	U1
-A	LT6119
-B	LT6119

APPROVALS		 <div> 1630 MCCARTHY BLVD  MILPITAS, CA 95035  PH: (408)432-1900  www.linear.com  LTC CONFIDENTIAL-  FOR CUSTOMER USE ONLY </div>	
PCB DES.	AK		
APP ENG.	CUYLER L.	<b>TITLE: TOP ASSEMBLY DRAWING</b> <b>PRECISION CURRENT SENSE WITH</b> <b>COMPARATORS AND REFERENCE</b>	
		SIZE N/A	IC NO. <b>LT6119IMS</b> <b>DEMO CIRCUIT 2261A</b>
SCALE = NONE		FILENAME: DC2261A-1.PCB	REV. 1 SHT 1 OF 1