


SIZE	QTY	SYM	PLATED	TOL
0.01	502	+	YES	+/-0.003
0.187	4	X	NO	+/-0.003
0.07	2	□	NO	+/-0.003
0.094	8	◇	YES	+/-0.003
0.008	1	⊗	YES	+/-0.003


- ADDITIONAL REQUIREMENT FOR PROTOTYPE FAB ONLY:
1. OUTGOING INSPECTION REPORT (BASED ON ACTUAL MEASUREMENTS AND CROSS SECTION).
 2. ADDITIONAL REQUIREMENTS FOR PRODUCTION FAB ONLY:
 1. PROVIDE COMPLIANCE CERTIFICATES FOR RoHS, REACH AND CONFLICT-FREE MINERALS.
 2. SOLDERABILITY BOARD WITH TEST RESULTS.
 3. OUTGOING INSPECTION REPORT (BASED ON ACTUAL MEASUREMENTS AND CROSS SECTION).
 4. VACUUM PACKED WITH DESICCANT.
 5. FULL PANEL WITH NO REJECT.

LAYER STRUCTURE

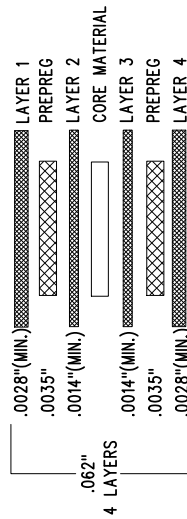

NOTES: UNLESS OTHERWISE SPECIFIED

1. FAB PER IPC-A-600.
2. MATERIAL: -LEAD FREE ASSEMBLY COMPLIANT, ISOLA FR-370HR OR EQUIVALENT.
-FINISHED THICKNESS TO BE 0.062 +/- .005
-TOTAL OF 4 LAYERS WITH 2 OZ. CU ON THE OUTER LAYERS AND 1 OZ. CU ON THE INNER LAYERS.
-FLAMMABILITY RATING: 94 V-0 MINIMUM.
3. SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00\"/>



UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES:

0.XX = ± 0.01

0.XXX = ± 0.005

INTERPRET DIM AND TOL

PER ASME Y14.5M-1994

THIRD ANGLE PROJECTION

ANALOG DEVICES

POWER BY LITTEL

www.analog.com

(408) 432-1900

TITLE: FABRICATION DRAWING

2MHZ, 1.5A MICROPOWER SYNCHRONOUS

MONOLITHIC STEP-DOWN REGULATOR

SIZE N/A

IC NO. LT8608BDD/LT8608BDD

REV 2

DC2521A

DC2521A-2.PCB

SHT 1 OF 1