



ECO	REV	DESCRIPTION	APPR	DATE
-	3	PRODUCTION	WL	06-03-19

NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610, CLASS 2.
2. ASSEMBLY REFLOW PROFILE SHALL BE IN ACCORDANCE WITH J-STD-020 WITH MAXIMUM SOLDER TEMPERATURE OF 250 DEGREES CELSIUS.
3. PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS. LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER. MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
4. DEPENDENCE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
5. APPLY ASSEMBLY STAMP OR QA STAMP TO BOTTOM OF BOARD (UNSHOWY AREA).
6. INSTALL TURRETS AND 4 STANDOFFS AT LOCATIONS SHOWN BELOW:

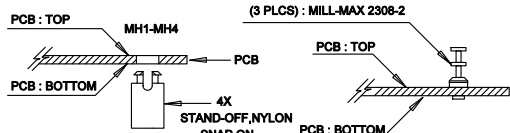

7. INSTALL 10 LED'S AS SHOWN BLEOW.



NOTE: ASSEMBLY STEPS 8-10 ARE POST ASSEMBLY. "WATER WASH ONLY"

- 8. CUT KAPTON TAPE TO LENGTH 0.75"IN. x 1.50"IN. AND PLACE AS SHOWN ON TOP OF BOARD.
NOTE: DO NOT COVER HOLE (N) WITH TAPE.**

- 9. CONNECT NTC ASSEMBLY 1 TO JSC CONNECTOR AS SHOWN IN FIG1. (NOT TO SCALE)**
NOTE: NTC ASSY1 RESISTOR REQUIRES THERMAL EPOXY (DOW CORNING 3-6752) SEE FIG 2.
 AND STEPS LISTED BELOW FOR PROPER PROCEDURE.

**STEP 1: ATTACH LTx1 TO BOARD, USE SILK SCREEN FOR LOCATION AND ENSURE LEADS OVERLAP PADS.
LAY BOARD WITH LTx1 DOWN, PUSH NTC1 AGAINST BOTTOM OF LTx1 THROUGH HOLE (N).
DON'T DISLodge LTx1, VERIFY NTC1 IS IN CONTACT WITH THE FERRITE.**

STEP 2: FILL HOLE (N) WITH THERMAL EPOXY.

STEP 3: CURE THERMAL EPOXY FOR 10 MINUTES, AT 125 DEG. C, BEFORE TURNING PCB OVER.

10. SOLDER LEADS OF LTx1, (WURTH, 760308100110) AS SHOWN


NOTE: LEADS OF LTx1 COIL NEED TO BE TWISTED PRIOR TO ASSEMBLY

TAKE BOTTOM TERMINAL WIRE AND PLACE OVER TOP TERMINAL WIRE.

CONTINUE TO TWIST TO EDGE OF HEAT SHRINK AT THE END OF THE TERMINAL WIRES.


FIG

JSC CONNECTOR PAD FOOTPRINT / J2, PART JSC CONNECTOR "TOP VIEW" MOUNT AS SHOWN





FIG

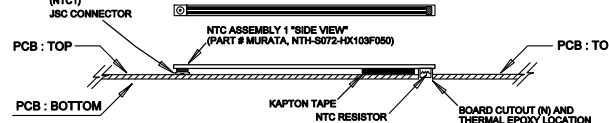NTC ASSEMBLY1 TOP VIEW



MANUFACTURERS P/N AND INSTRUCTIONS FOR USE AND HANDLING

1. **USE BERTHEC PPTDTE-3/4, 38yd, ROLL AVAILABLE FROM KAPTON TAPE.COM**
2. **USE 20mmx3 (SEE NOTE 9) OF DOW CORNING 3-8752 THERMAL EPOXY DISPENSED FROM A 30cc TUBE, 30cc TUBE ORDERABLE FROM ELLSWORTH ADHESIVES AS 3-5752 TC ADHESIVE 75G.**
A. CURE THERMAL EPOXY BY PUTTING 125°C OVEN FOR 10 MINUTES.
B. THERMAL EPOXY MUST BE STORED AT BELOW 5°C BEFORE AND AFTER EACH USE.
C. ALWAYS USE PURPOSE MADE DISPENSING TOOL (ITEM I) AND TIP (II).
i) ELLSWORTH ADHESIVES P/N FISNAR JD027
ii) ELLSWORTH ADHESIVES P/N 8001068, 12.7mm 16 GAUGE NEEDLE TIP

APPROVALS		 ANALOG DEVICES  POWER BY LINEAR		1650 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)552-1000 WWW.ANALOG.COM	
PCB DES. NC		TITLE: TOP ASSEMBLY DRAWING: SINGLE 3.6V/4.2V 650mA AUTORESONANT WIRELESS TRANSMITTER			
APP ENG. WL					
		SIZE IC NO.	LTC4125		REV
		N/A	DEMO CIRCUIT 2556A		03
SCALE = NONE		FILENAME:		SHT 1 of 2	