



REVISION HISTORY			
ECO	REV	DESCRIPTION	APPR
-	3	PRODUCTION	WL
			DATE
			06-03-19

# NOTES: UNLESS OTHERWISE SPECIFIED

- WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610, CLASS 2.
- ASSEMBLY REFLOW PROFILE SHALL BE IN ACCORDANCE WITH J-STD-020 WITH MAXIMUM SOLDER TEMPERATURE OF 250 DEGREES CELSIUS.
- PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS. LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER. MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
- DEPANELIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
- APPLY ASSEMBLY STAMP OR QA STAMP TO BOTTOM OF BOARD (UNSHOWY AREA).
- INSTALL TURRETS AND 4 STANDOFFS AT LOCATIONS SHOWN BELOW:

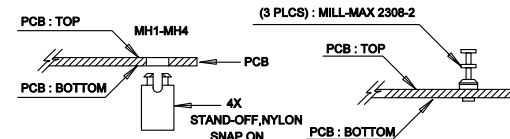

- INSTALL 10 LED'S AS SHOWN BLEOW.




NOTE: ASSEMBLY STEPS 8-10 ARE POST ASSEMBLY. "WATER WASH ONLY"

- CUT KAPTON TAPE TO LENGTH 0.75"IN. x 1.50"IN. AND PLACE AS SHOWN ON TOP OF BOARD.  
NOTE: DO NOT COVER HOLE (N) WITH TAPE.
- CONNECT NTC ASSEMBLY 1 TO JSC CONNECTOR AS SHOWN IN FIG1. (NOT TO SCALE)  
NOTE: NTC ASSY1 RESISTOR REQUIRES THERMAL EPOXY (DOW CORNING 3-6752) SEE FIG 2. AND STEPS LISTED BELOW FOR PROPER PROCEDURE.  
STEP 1: ATTACH LTx1 TO BOARD, USE SILK SCREEN FOR LOCATION AND ENSURE LEADS OVERLAP PADS. LAY BOARD WITH LTx1 DOWN, PUSH NTC1 AGAINST BOTTOM OF LTx1 THROUGH HOLE (N). DONT DISLODGE LTx1, VERIFY NTC1 IS IN CONTACT WITH THE FERRITE.  
STEP 2: FILL HOLE (N) WITH THERMAL EPOXY.  
STEP 3: CURE THERMAL EPOXY FOR 10 MINUTES, AT 125 DEG. C, BEFORE TURNING PCB OVER.
- SOLDER LEADS OF LTx1, (WURTH, 780308100110) AS SHOWN.  
NOTE: LEADS OF LTx1 COIL NEEDTO BE TWISTED PRIOR TO ASSEMBLY. TAKE BOTTOM TERMINAL WIRE AND PLACE OVER TOP TERMINAL WIRE. CONTINUE TO TWIST TO EDGE OF HEAT SHRINK AT THE END OF THE TERMINAL WIRES.

FIG 1.




FIG 2.

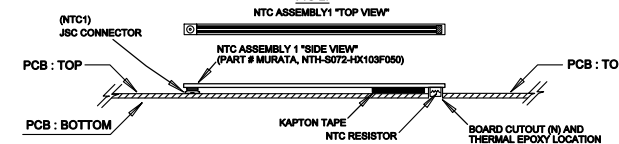




## MANUFACTURERS P/N AND INSTRUCTIONS FOR USE AND HANDLING

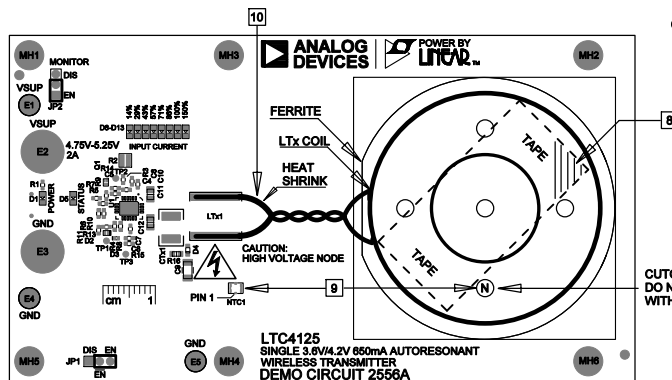- USE BERTECH PPTDE-3/4, 39yd, ROLL AVAILABLE FROM KAPTON TAPE.COM
- USE 20mm3 (SEE NOTE 9) OF DOW CORNING 3-6752 THERMAL EPOXY DISPENSED FROM A 30cc TUBE, 30cc TUBE ORDERABLE FROM ELLSWORTH ADHESIVES AS 3-6752 TC ADHESIVE 75G.  
A. CURE THERMAL EPOXY BY PUTTING 125°C OVEN FOR 10 MINUTES.  
B. THERMAL EPOXY MUST BE STORED AT BELOW 5°C BEFORE AND AFTER EACH USE.  
C. ALWAYS USE PURPOSE MADE DISPENSING TOOL ( ITEM I ) AND TIP ( II ).  
I) ELLSWORTH ADHESIVES P/N FISNAR JD627  
II) ELLSWORTH ADHESIVES P/N 8001086, 12.7mm 18 GAUGE NEEDLE TIP

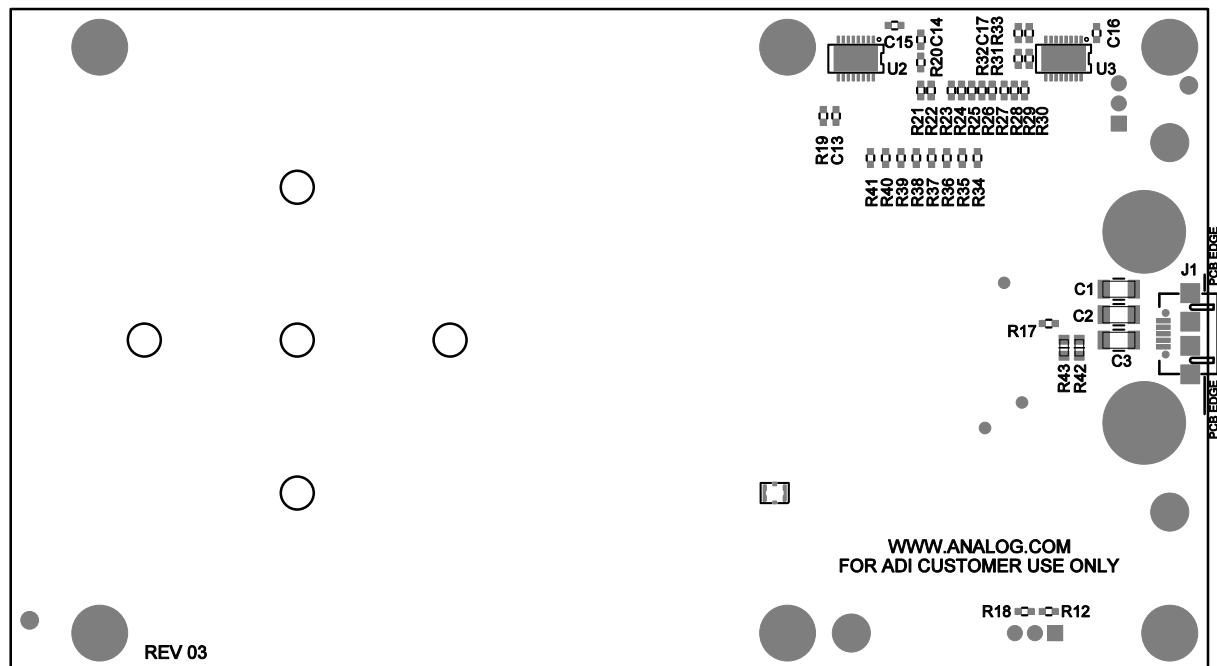

APPROVALS		ANALOG DEVICES		POWER BY LITON		1650 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408) 652-1800 WWW.ANALOG.COM	
PCB DES.	NC	TITLE: TOP ASSEMBLY DRAWING: SINGLE 3.6V/4.2V 650mA AUTORESONANT WIRELESS TRANSMITTER		SIZE IC NO. N/A LTC4125 N/A DEMO CIRCUIT 2556A		REV. 03	
APP ENG.	WL						
SCALE = NONE		FILENAME:		SHT 1 of 2			



APPROVALS		<div> <b>ANALOG DEVICES</b></div> <div> <b>POWER BY LINEAR™</b></div> <div>1630 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)432-1900 WWW.ANALOG.COM</div>		
PCB DES.	NC			
APP ENG.	WL			
		TITLE: BOTTOM ASSEMBLY DRAWING: SINGLE 3.6V/4.2V 650mA AUTORESONANT WIRELESS TRANSMITTER'		
		SIZE	IC NO. LTC4125	REV.
		N/A	DEMO CIRCUIT 2556A	3
SCALE = NONE		FILENAME:		SHT 2 of 2