


**NOTES: UNLESS OTHERWISE SPECIFIED**

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
2. ASSEMBLY PROCESS: REFLOW SOLDER TOP SIDE SMD.  
MAXIMUM SOLDER TEMPERATURE IS 240 DEG. C.
3. MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
4. INSTALL SHUNTS WHERE SHOWN .

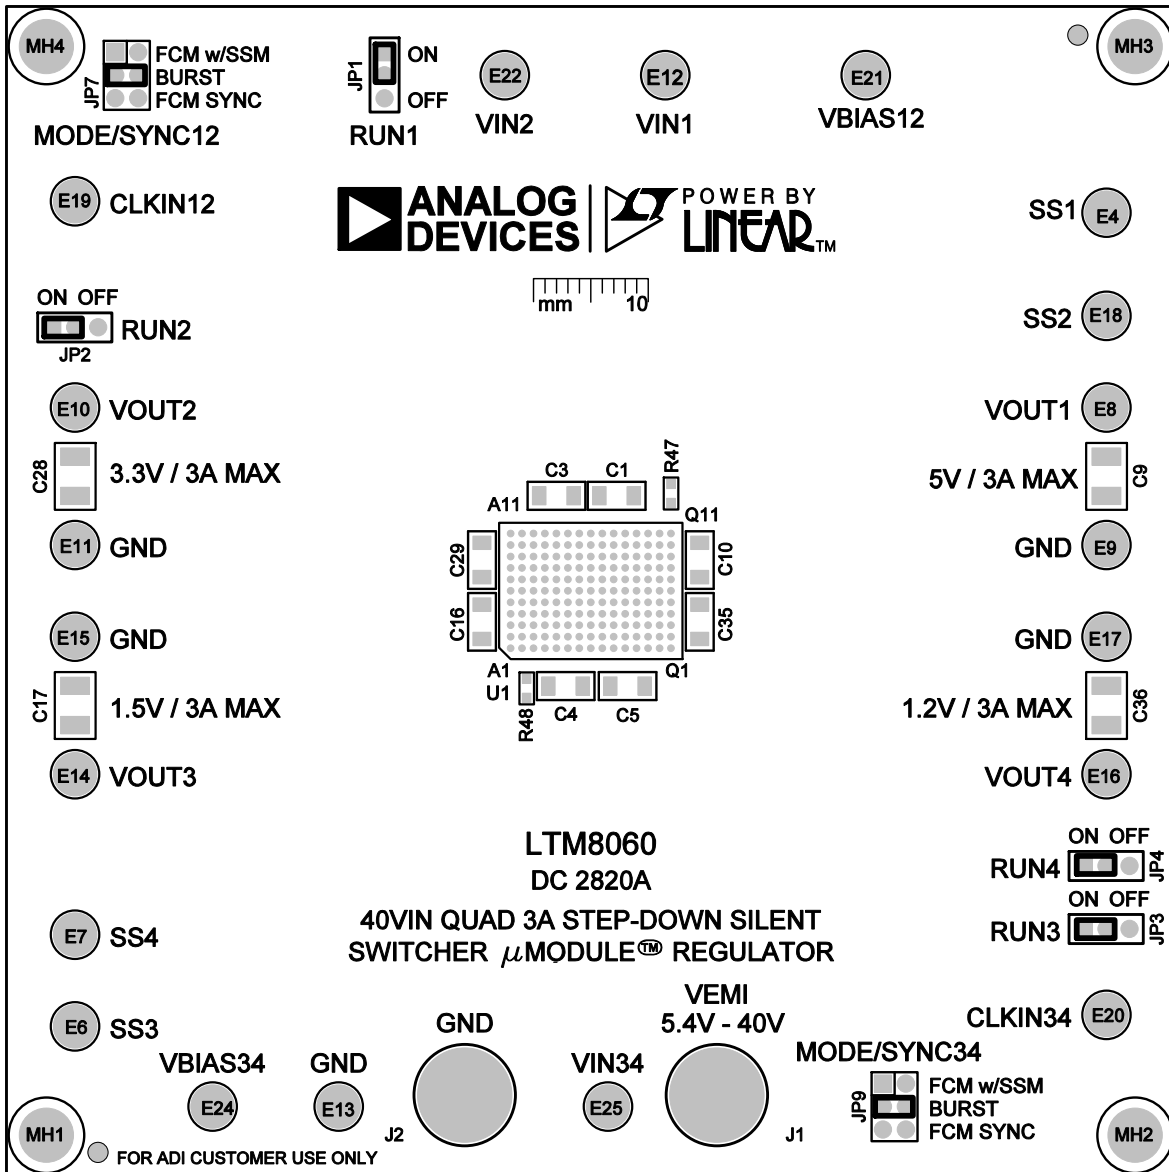

**ANALOG DEVICES INC.**

DC2820A REV 2  
07/03/18

TOP SILKSCREEN  
TOP ASSEMBLY