



LT3002
MICROPOWER NO-OPTO
ISOLATED FLYBACK CONVERTER
DC3077A

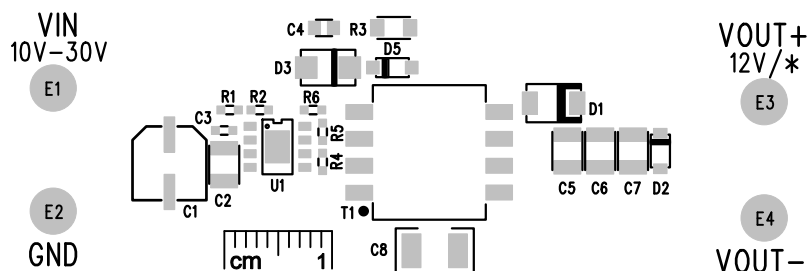

* SEE DEMO MANUAL

NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
MAXIMUM SOLDER TEMPERATURE IS 240 DEG C.
2. ASSEMBLY PROCESS SHALL INCLUDE: REFLOW SOLDER TOP SIDE SMD.
3. PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS.
LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER.
MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
4. DEPANELIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE
BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
5. DO NOT APPLY ANY KIND OF ASSEMBLY STAMP OR QA STAMP
TO ANY BOARD.

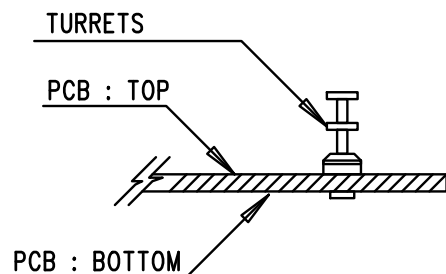

TITLE: TOP ASSEMBLY DRAWING
MICROPOWER NO-OPTO ISOLATED FLYBACK CONVERTER

SIZE	IC NO.	REV.
N/A	LT3002ES8E DC3077A	2
		SHT 1 OF 1