# LM1 – LEADLESS CERAMIC HIGH FREQUENCY SMT PACKAGE



## Suggested LM1 PCB Land Pattern

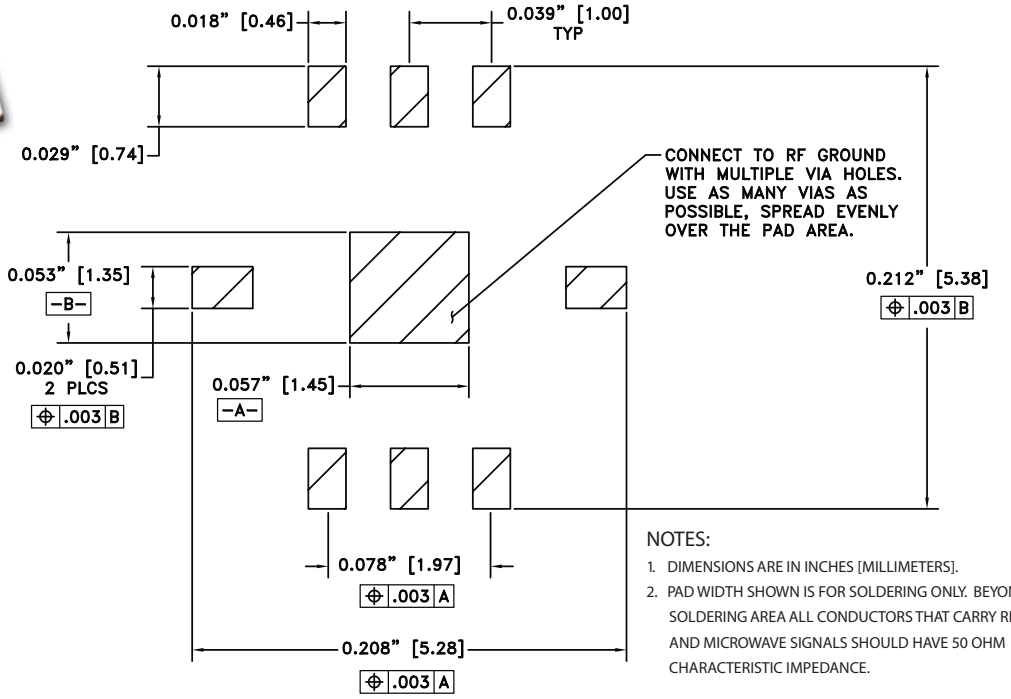


NOTES:

1. DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. PAD WIDTH SHOWN IS FOR SOLDERING ONLY. BEYOND SOLDERING AREA ALL CONDUCTORS THAT CARRY RF AND MICROWAVE SIGNALS SHOULD HAVE 50 OHM CHARACTERISTIC IMPEDANCE.