
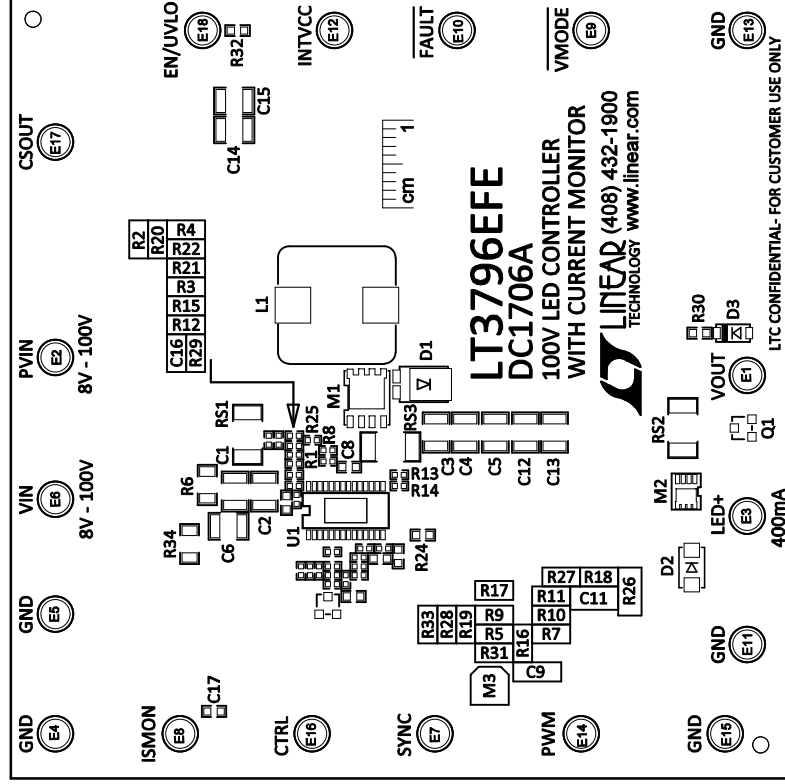



REVISION HISTORY			
ECO	REV	DESCRIPTION	APPR
—	4	PRODUCTION	KEITH S.
			03/14/12

NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
2. ASSEMBLY PROCESS SHALL INCLUDE: REFLOW SOLDER TOP SIDE SMD. MAXIMUM SOLDER TEMPERATURE IS 240 deg C.
3. PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS. LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER. MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
4. INSTALL SHUNT AS SHOWN ON ASSY DRAWING.
5. DEPANELIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
6. DO NOT APPLY ANY KIND OF ASSEMBLY STAMP OR QA STAMP TO ANY BOARD.

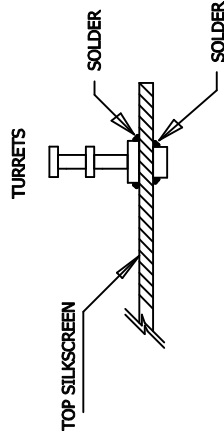

APPROVALS				1630 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408) 432-1900 WWW.LINEAR.COM LTC CONFIDENTIAL- FOR CUSTOMER USE ONLY	
PCB DES.	RB				
APP ENG.	KEITH S.				
		TITLE: TOP ASSEMBLY DRAWING 100V LED CONTROLLER WITH CURRENT MONITOR			
		SIZE	IC NO.	LT3796EFE	REV. 4
		N/A	DEMO CIRCUIT 1706A		
SCALE = NONE		FILENAME: DC1706A-Rev4.PCB			SHT 1 OF 1