
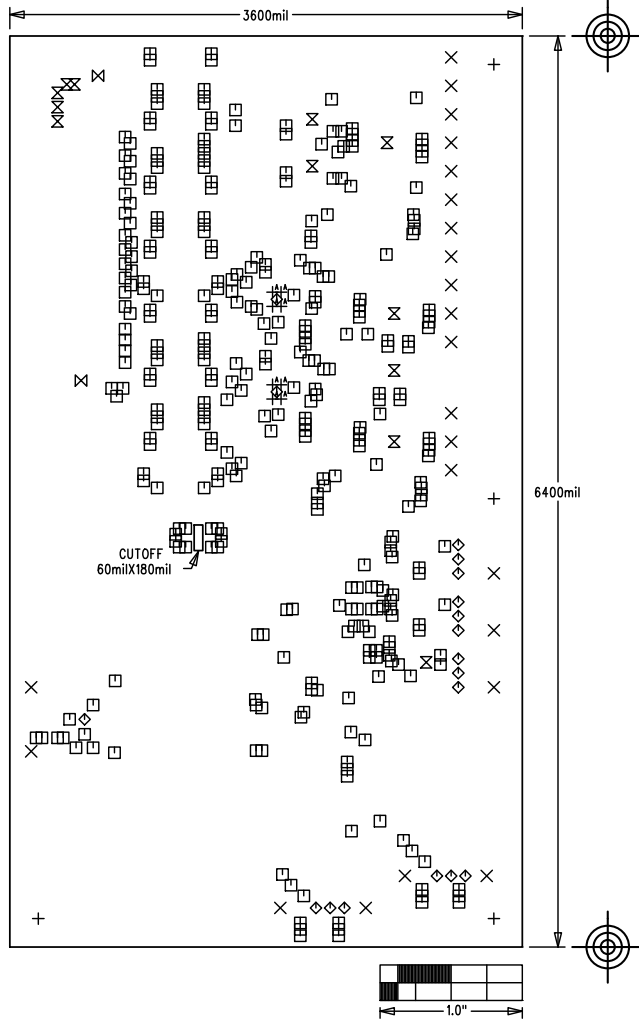



GREENBRAE (MAXREFDES71#)	
Dual Input and Output Analog IO	
P/N: EPCBREFDES71	REV A
 maxim integrated™	
LAYER	DRILL & MECHANICALS
DATE:	ALL UNITS ARE IN 0.001"



NOTES: UNLESS OTHERWISE SPECIFIED

- FABRICATE USING PROVIDED GERBER FILES PER LATEST REVISION OF IPC-A-600 UNLESS OTHERWISE NOTED.
- MATERIAL: RoHS COMPLIANT FR-408 OR SIMILAR LAMINATE MATERIAL WITH $T_g \geq 170$ AND COMPATIBLE WITH LEAD-FREE SOLDERING PROCESS.
- BOARD DIMENSIONS: 3.60"x6.40" ± 0.010 ".
BOARD THICKNESS: 0.062"
- LAYERS: 6. SEE LAYER STACKUP CHART BELOW.
- MINIMUM TRACE/SPACING: 9 MILS/6 MILS.
- COPPER CLAD FINISH: 1oz MINIMUM ON OUTER LAYERS AND 1oz ON INNER LAYERS.
- SURFACE MOUNT PADS: 861.
- SOLDERMASK: GREEN LPI SMOBC.
- LEGENDS: WHITE, DOUBLE-SIDED, NON-CONDUCTIVE EPOXY INK OR EQUIVALENT.
CLIPPED ALL LEGENDS FROM EXPOSED METAL.
- PLATING: MUST BE LEAD FREE AND RoHS COMPLIANT.
- FINISH: VENDOR SHOULD USE THE MOST ECONOMICAL LEAD FREE AND RoHS COMPLIANT PROCESS AVAILABLE OR AS SPECIFIED IN PURCHASE ORDER.
APPROVED FINISH:
HASL LEAD-FREE
IMMERSION TIN
IMMERSION GOLD
- VENDOR LOGO & DATE CODE IN INK ON BOTTOM SIDE ONLY. DATE CODE FORMAT MUST BE YYWW ONLY.
- THRU HOLES: 0.001" MIN.
- TOLERANCES:
PLATED-THRU HOLES: ± 0.003 "
PATTERN-TO-PATTERN: ± 0.005 "
LEGEND TO LEGEND: ± 0.007 "
SOLDERMASK TO PATTERN: ± 0.005 ".



CROSS SECTION DETAIL

SIZE	QTY	SYM	PLATED	TOL
125	4	+	YES	± 3.0
63	23	X	YES	± 3.0
15	336	□	YES	± 3.0
37	18	◇	YES	± 3.0
25	12	⊗	YES	± 3.0
50	2	⊠	NO	± 3.0
20	8	⊕	YES	± 3.0