



### OPTIONAL DISTRIBUTED CAPS

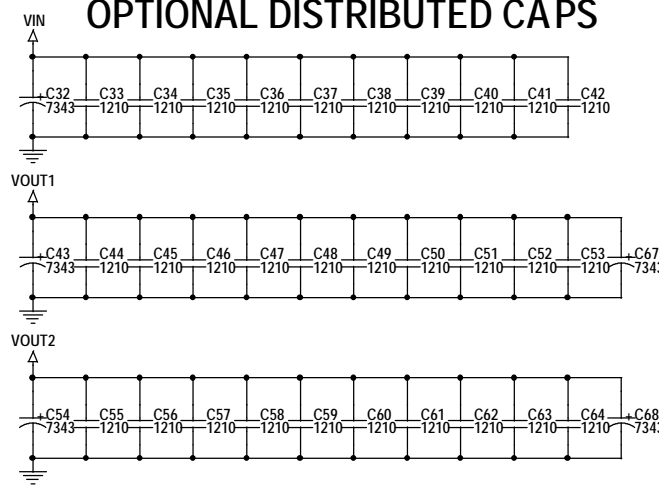


### OPTIONAL BIAS CIRCUIT

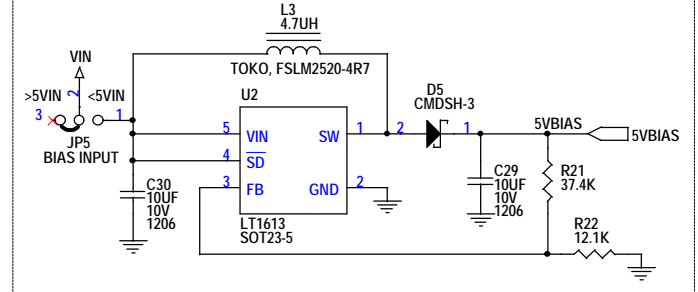

### NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL RESISTORS ARE IN OHMS, 0603.
2. R23=R24=R25=0 OHM WILL BE ASSEMBLED ONLY IF TWO OUTPUTS ARE TIED TOGETHER FOR HIGH CURRENT OUTPUT.
3. INSTALL SHUNTS ON JP1-JP5 PIN 2 AND 3. IF VIN<5V, INST ALL SHUNTS ON JP4 AND JP5 PIN 1 AND 2.

CONTRACT NO.	 <b>LINEAR TECHNOLOGY</b>		1630 McCarthy Blvd. Milpitas, CA 95035 Phone: (408)432-1900 Fax: (408)434-0507 LTC Confidential-For Customer Use Only	
APPROVALS			TITLE:	<b>2-PHASE DUAL OUTPUT POWER SUPPLY</b>
DRAWN: KIM T.	CHECKED:	SIZE	DWG NO.	REV
APPROVED:	ENGINEER: WEI C.	A	DC447A-1 * LTC3728EUH	A
DESIGNER:	DATE: Friday, August 02, 2002	SHEET 1 OF 1		