REVISION RECORD		
REV.	DESCRIPTION:	DATE:
1	Initial Release per ECO 1071	12/29/11

NOTES (UNLESS OTHERWISE SPECIFIED):

1. ALL THROUGH HOLE COMPONENTS TO BE SEATED AGAINST COMPONENT SIDE OF PRINTED CIRCUIT BOARD BEFORE WAVE SOLDER IN ORDER TO MAINTAIN MINIMUM DISTANCE BETWEEN COMPONENT BODY AND SURFACE OF PRINTED CIRCUIT BOARD.
2. SQUARE PAD DENOTES PIN ONE OF CONNECTORS AND HEADERS.
3. FINISHED ASSEMBLY TO BE FREE OF ALL SOLDER FLUX RESIDUES.
4. FINISHED ASSEMBLY TO BE SHIPPED IN APPROVED ANTI-STATIC PACKAGING.
5. SQUARE PAD DENOTES PIN ONE OF CONNECTORS AND HEADERS.

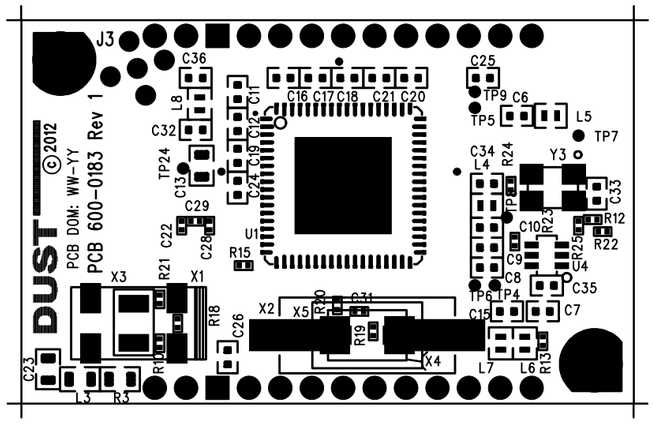

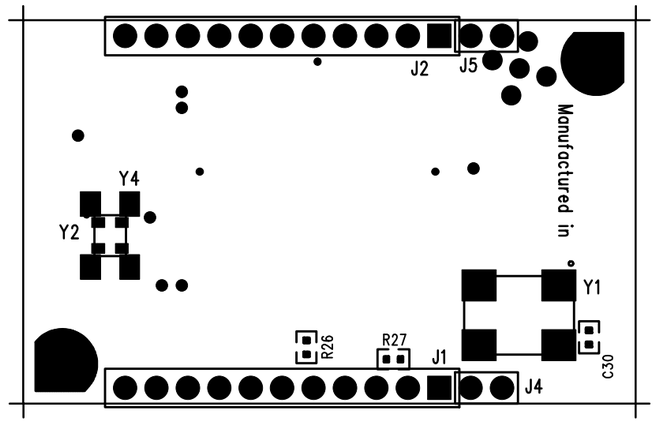

		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES:	APPROVALS	DATE	DUST NETWORKS
		TOLERANCES ARE: FRACTIONS: DECIMALS: .XX ± .01 ANGLES: 0° 30" .XXX ± .005	DRAWN BY: RPD	12-29-11	TITLE: ASSEMBLY DRAWING, PCB, BEAR, ROHS
			CHECKED		
			ENGRG		
SEE ARENA		MATERIAL – SEE NOTES.	ISSUED		B / FSCM NO. / DWG NO. 705-0183 / REV. 1
NEXT ASSY	USED ON	FINISH – SEE NOTES.	CONTRACT NO.		SCALE: NONE / SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING			