

**ADuCM330WFS/ADuCM331WFS Hardware Reference Manual****PREFACE**

The ADuCM330WFS/ADuCM331WFS hardware reference manual published by Analog Devices, Inc., employs the following terminology to indicate actions, functions, and processes that are mandatory in ensuring that the ADuCM330WFS/ADuCM331WFS perform to the standards established by the ISO 26262-2018:

- ▶ Required, requires, requirement: indicates no other option.
- ▶ Must: indicates an obligatory action.
- ▶ Can: indicates a possible option.
- ▶ May: indicates either optional or permissible, context dependent.
- ▶ Should: a recommended condition or action that is not required but that reflects best practice.
- ▶ Comply, complies, compliance: meets specifications or other requirements provided by a secondary source, such as a data sheet.
- ▶ Obligation: refers to the responsibility of the user, including a potential legal responsibility.
- ▶ Must not: refrain from taking an action or refrain from causing a condition.
- ▶ Do not: refrain from taking an action.

**SCOPE**

This reference manual provides a detailed description of the functionality and features of the ADuCM330WFS/ADuCM331WFS.

The information is relevant for Silicon Revision P60.

Full specifications on the ADuCM330WFS/ADuCM331WFS are available in the product data sheet. Consult the data sheet in conjunction with this reference manual when working with this device.

Note that throughout this hardware reference manual, multifunction pins are referred to either by the entire pin name or by a single function of the pin when only that function is relevant. For more information, see the ADuCM330WFS/ADuCM331WFS data sheet.

**TABLE OF CONTENTS**

Preface.....	1	Reset Operation.....	31
Scope.....	1	Reset Memory Mapped Register.....	31
Using the ADuCM330WFS/ADuCM331WFS		Memory Organization.....	33
Hardware Reference Manual.....	4	Flash Controller.....	34
Number Notations.....	4	Flash Controller Features.....	34
Register Access Conventions.....	4	Flash Controller Overview.....	34
ADuCM330WFS/ADuCM331WFS Overview.....	5	Flash Memory Organization.....	34
Main Features of the ADuCM330WFS/		Writing to Flash/EE Memory.....	35
ADuCM331WFS.....	5	Erasing Flash/EE Memory.....	36
Reference Documents.....	6	Flash Controller Operation.....	37
ARM Cortex-M3 Processor.....	7	Flash Protection.....	37
ARM Cortex-M3 Processor Features.....	7	Flash Controller Failure Analysis Key.....	38
ARM Cortex-M3 Processor Overview.....	7	Flash Integrity Signature Feature.....	39
ARM Cortex-M3 Processor Operation.....	7	Flash Controller Performance and	
Implemented Features.....	8	Command Duration.....	39
Related Documents.....	8	Flash Controller Memory Mapped Registers....	40
Exceptions and Interrupts.....	10	SRAM.....	49
ARM Cortex-M3 Processor and Fault		SRAM Interface Features.....	49
Management.....	10	SRAM Initialization.....	49
Nested Vectored Interrupt Controller.....	10	SRAM Memory Mapped Registers.....	49
Setting Interrupt Priorities.....	11	ADC.....	51
ARM Cortex-M3 Processor and NVIC		ADC Features and Overview.....	51
Registers.....	12	ADC Operation.....	53
External Interrupt Configuration.....	13	ADC Calibration.....	55
External Interrupt Configuration Memory		ADC Digital Filter Response.....	58
Mapped Registers.....	13	Digital Filter Options.....	60
Power Management Unit.....	15	Fast Temperature Conversion Mode.....	61
Power Management Unit Features.....	15	ADC Diagnostics.....	62
Power Management Unit Overview.....	15	Other ADC Support Circuits.....	62
Power Management Unit LDO Switching.....	15	ADC Chopping.....	63
Power Management Unit Power Modes		ADC Memory Mapped Registers.....	64
Operation.....	16	Timers.....	78
Power Supply Support Circuits.....	16	Timer Synchronization.....	78
Power Modes Memory Mapped Registers.....	17	General-Purpose Timer.....	79
System Clocks.....	19	Wake-Up Timer.....	84
System Clocks Features.....	19	Watchdog Timer.....	90
System Clocks Overview.....	19	Watchdog Timer Memory Mapped Registers...	92
System Clocks Operation.....	19	General-Purpose Digital Inputs and Outputs.....	95
System Clocks Memory Mapped Registers....	20	General-Purpose Digital Inputs and Outputs	
High Frequency Oscillator Calibration.....	20	Overview.....	95
High Frequency Oscillator Calibration		General-Purpose Digital Inputs and Outputs	
Memory Mapped Registers.....	21	Features.....	95
Low Frequency Oscillator Calibration.....	24	General-Purpose Digital Port Multiplex.....	95
Low Frequency Oscillator Calibration		General-Purpose Digital Input and Output	
Memory Mapped Registers.....	25	Operation.....	95
Kernel.....	28	GPIO Memory Mapped Registers.....	96
Kernel Implementation.....	28	Serial Peripheral Interface.....	100
Reset.....	31	SPI Features.....	100
Reset Features.....	31	SPI Overview.....	100

**TABLE OF CONTENTS**

SPI Operation.....	100	LIN Interface.....	114
SPI Transfer Initiation.....	101	LIN Overview.....	114
SPI Interrupts.....	103	LIN Features.....	114
Wire-Or'ed Mode (WOM).....	104	LIN User Operation.....	114
CSERR Condition.....	104	LIN Memory Mapped Registers.....	116
SPI and Power-Down Modes.....	104	Device Identification.....	128
SPI Memory Mapped Registers.....	104	R4.....	128
High Voltage Peripheral Control Interface.....	109	FEEDATL Register.....	128
High Voltage Peripheral Control Interface Overview.....	109	Chip ID Register.....	128
High Voltage Peripheral Control Interface Operation.....	109	System Serial ID 0.....	128
High Voltage Die Registers.....	110	System Serial ID 1.....	129
High Voltage Peripheral Control Interface Memory Mapped Registers.....	110	Complete MMR Listing.....	130

**REVISION HISTORY****1/2023—Rev. D to Rev. E**

Changes to Downloader Mode Section.....	29
Changes to Page Erase Code Example Section.....	36
Changes to Table 48 .....	40
Changes to Table 49.....	42
Changes to Table 51.....	43
Changes to Table 82.....	65
Changes to Table 138.....	92
Changes to SPI Transfer Initiation Section.....	101
Changes to Table 179.....	122

**USING THE ADUCM330WFS/ADUCM331WFS HARDWARE REFERENCE MANUAL****NUMBER NOTATIONS***Table 1. Number Notations*

Notation	Description
Bit N	Bits are numbered in little endian format, that is, the LSB of a number is referred to as Bit 0.
V[x:y]	Bit field representation for Bit x to Bit y of a value or a field (V).
0xNN	Hexadecimal (Base 16) numbers are preceded by the 0x prefix.
0bNN	Binary (Base 2) numbers are preceded by the 0b prefix.
NN	Decimal (Base 10) numbers are represented using no additional prefixes or suffixes.
0bXX	An X in the binary number means that the contents of the bit are not defined.
0xXX	An X in the hexadecimal number means that the contents of the four bits are not defined.

**REGISTER ACCESS CONVENTIONS***Table 2. Register Access Conventions*

Mode	Description
Read/Write	Memory location has read and write access.
Read	Memory location is read access only. A read always returns 0, unless otherwise specified.
Write	Memory location is write access only.

## ADUCM330WFS/ADUCM331WFS OVERVIEW

The ADuCM330WFS/ADuCM331WFS are fully integrated, 8 kHz, data acquisition systems incorporating dual, high performance, multichannel, Σ-Δ analog-to-digital converters (ADCs), a 32-bit ARM® Cortex®-M3 processor, and flash memory.

The ADuCM330WFS has a 96 kB program flash, and the ADuCM331WFS has a 128 kB program flash. Both devices have 4 kB data flash. The ADuCM330WFS/ADuCM331WFS can be used in many systems requiring voltage, current, and temperature sensing with processing power, but are designed as an optimal and complete system solutions for shunt based battery monitoring in automotive and nonautomotive applications. The ADuCM330WFS/ADuCM331WFS integrate all of the required features to precisely and intelligently monitor, process, and diagnose 12 V battery parameters, including battery current, voltage, and temperature over a wide range of operating conditions.

Minimizing external system components, the device is powered directly from a 12 V battery. On-chip, low dropout (LDO) regulators generate the supply voltage for two integrated Σ-Δ ADCs. The ADCs precisely measure battery current, voltage, and temperature to characterize the state of health and the charge of the car battery.

The device operates from an on-chip, 16.384 MHz, high frequency oscillator that supplies the system clock. This clock is routed through a programmable clock divider from which the core clock operating frequency is generated. The device also contains a 32.768 kHz low frequency oscillator for low power operation.

The analog subsystem consists of an ADC with a programmable gain amplifier (PGA) to allow various current and voltage ranges to be monitored. The subsystem also includes a precision reference on chip.

The ADuCM330WFS/ADuCM331WFS integrate a range of on-chip peripherals that can be configured under core software control as required in the application. These peripherals include a serial peripheral interface (SPI) input and output communication controller, six general-purpose input and output (GPIO) pins, one general-purpose timer, a wake-up timer, and a watchdog timer.

The ADuCM330WFS/ADuCM331WFS are specifically designed to operate in battery-powered applications where low power operation is critical. The device, including the microprocessor core, can be configured to allow the power consumption to be minimized depending on the operating mode. The ADuCM330WFS/ADuCM331WFS include a local interconnect network (LIN) physical interface for single-wire, high voltage communications in automotive environments. Refer to the ADuCM330WFS/ADuCM331WFS data sheet for more information.

## MAIN FEATURES OF THE ADUCM330WFS/ADUCM331WFS

### Precision Measurement

The device has the following precision measurement features:

- ▶ Dual-channel, simultaneous sampling, 20-bit, Σ-Δ ADCs (thus minimizing gain switching)
- ▶ Programmable ADC conversion rate
- ▶ On-chip, precision voltage reference
- ▶ Current channel
  - ▶ Fully differential, buffered input
  - ▶ Programmable gain
  - ▶ Digital comparator with current accumulator feature
- ▶ The voltage channel has a buffered, on-chip attenuator for 12 V battery input
- ▶ The temperature channel has external and on-chip temperature sensor options

### Microcontroller

The device has the following microcontroller related features:

- ▶ ARM Cortex-M3 32-bit processor
- ▶ Serial wire download and debug
- ▶ 16.384 MHz high frequency oscillator
- ▶ 32.768 kHz low frequency oscillator for low power operation

### Memory

The device has the following memory related features:

## ADuCM330WFS/ADuCM331WFS OVERVIEW

- ▶ 96 kB (ADuCM330WFS) or 128 kB (ADuCM331WFS) program Flash/EE memory options
- ▶ 4 kB data Flash/EE memory
- ▶ 10 kB static random access memory (SRAM)
- ▶ 10,000 cycle Flash/EE endurance
- ▶ 20 year Flash/EE retention
- ▶ In-circuit download via serial wire and LIN
- ▶ Error correction code (ECC) available on all flash and SRAM memories

### Power

The device can operate directly from a 12 V battery supply and has a low power monitor mode. See the ADuCM330WFS/ADuCM331WFS data sheet for exact power consumption.

### On-Chip Peripherals

The device incorporates seven on-chip peripherals. The on-chip peripherals are on-chip power-on reset, a general-purpose timer, a wake-up timer, a watchdog timer, a GPIO port with configurable SPI interface, and a LIN transceiver that is compliant to LIN 2.2A and Society of Automotive Engineers (SAE) J2602-2.

### Package

The device is packaged in a 32-lead, 6 mm × 6 mm LFCSP.

## REFERENCE DOCUMENTS

ADuCM330WFS/ADuCM331WFS related reference documentation include the following:

- ▶ ADuCM330WFS/ADuCM331WFS data sheet
- ▶ ISO 26262:2018
- ▶ LIN2.2A specification, December 2010
- ▶ ADuCM330WFS/ADuCM331WFS safety manual (contact your local Analog Devices, Inc., sales office to provide the safety manual)
- ▶ [AN-946 Application Note](#)
- ▶ [AN-609 Application Note](#)

## ARM CORTEX-M3 PROCESSOR

### ARM CORTEX-M3 PROCESSOR FEATURES

#### High Performance

The ARM Cortex-M3 processor high performance features include the following:

- ▶ Operates up to 1.25 Dhystone million instructions per second (DMIPS)/MHz.
- ▶ Many instructions, including integer multiply, are single cycle.
- ▶ Separate data and instruction busses allow simultaneous data and instruction accesses to be performed.
- ▶ Optimized for single-cycle flash usage.

#### Low Power

The ARM Cortex-M3 processor has low standby current and a core implemented using advanced clock gating. Therefore, only the actively used logic consumes dynamic power. The ARM Cortex-M3 processor also has two sleep modes (sleep mode and deep sleep mode) that provide different levels of power saving. The SLEEPDEEP bit of the system control register selects the sleep mode.

#### Advanced Interrupt Handling

The nested vectored interrupt controller (NVIC) greatly reduces interrupt latency because additional software is not needed to determine which interrupt handler to serve. In addition, additional software is not needed to set up nested interrupt support.

The ARM Cortex-M3 processor automatically pushes registers onto the stack at entry interrupt and retrieves them at the exit interrupt. This process reduces interrupt handling latency and allows interrupt handlers to be normal C functions.

The ARM Cortex-M3 processor also has dynamic priority controls for each interrupt, latency reduction using late arrival interrupt acceptance and tail chain interrupt entry, and immediate execution of a nonmaskable interrupt request for safety critical applications.

#### System Features

The ARM Cortex-M3 processor system has support for bit band operation, unaligned data access, and advanced fault handling features that include various exception types and fault status registers.

#### Debug Support

The ARM Cortex-M3 processor has debug support features that include serial wire debug port (SWDP) interfaces, a flash patch and breakpoint (FPB) unit for implementing breakpoints that is limited to two active breakpoints, and a data watchpoint and trigger (DWT) unit for implementing watchpoints, trigger resources, and system profiling. The ARM Cortex-M3 processor is limited to one active watchpoint.

## ARM CORTEX-M3 PROCESSOR OVERVIEW

The ADuCM330WFS/ADuCM331WFS contain an embedded ARM Cortex-M3 processor, Revision r2p0 (AT420). The ARM Cortex-M3 processor provides a high performance, low cost platform that meets the system requirements of minimal memory implementation, reduced pin count, and low power consumption, while delivering high computational performance and fast system response to interrupts.

## ARM CORTEX-M3 PROCESSOR OPERATION

The following sections describe the implementation and configuration of the ARM Cortex-M3 processor component in the ADuCM330WFS/ADuCM331WFS.

### Serial Wire Debug (SWD)

The ADuCM330WFS/ADuCM331WFS support the serial wire interface via the SWCLK pin and the SWDIO pin. This device does not support the 5-wire joint test action group (JTAG) interface.

### ROM Table

The ADuCM330WFS/ADuCM331WFS implement the default read only memory (ROM) table.

## ARM CORTEX-M3 PROCESSOR

### NVIC Interrupts

The ARM Cortex-M3 processor includes an interrupt controller, the NVIC. The NVIC provides nested interrupt support, vectored interrupt support, dynamic priority changes support, and interrupt masking.

In addition, the NVIC also has a nonmaskable interrupt (NMI) input. The NVIC is implemented on the ADuCM330WFS/ADuCM331WFS and is described in more detail in the [Nested Vectored Interrupt Controller](#) section.

### Wake-Up Interrupt Controller (WIC)

The WIC provides a device configuration with the lowest possible power-down current.

More information is available in the [Power Management Unit](#) section.

If the device enters a power saving mode when servicing an interrupt, the device can only then wake up from a higher priority interrupt source.

## IMPLEMENTED FEATURES

The ARM Cortex-M3 processor features implemented on the ADuCM330WFS/ADuCM331WFS include the following:

- ▶ Central processor unit (CPU) ARMv7-M Core
- ▶ NVIC: 17 interrupts are present (Level = 3, giving 8 levels of priority)
- ▶ WIC: 20 interrupts are present, Interrupt 0 to Interrupt 2 are from the core, Interrupt 3 to Interrupt 20 are the 17 interrupt lines
- ▶ Debug mode (Level 1) with one watchpoint and two breakpoints
- ▶ Serial wire interface
- ▶ 3x high performance bus (AHB) lite

Optional ARM Cortex-M3 processor features that are not implemented include the following:

- ▶ Memory Protection Unit (MPU)
- ▶ Instrumentation Trace Macrocell (ITM)
- ▶ Embedded Trace Macrocell (ETM)
- ▶ JTAG interface

The configuration parameters used to implement the ARM Cortex-M3 processor in the ADuCM330WFS/ADuCM331WFS include the following:

- ▶ MPU\_PRESENT = 0
- ▶ NUM\_IRQ = 17
- ▶ LVL\_WIDTH = 3
- ▶ TRACE\_LVL = 0
- ▶ DEBUG\_LVL = 1
- ▶ JTAG\_PRESENT = 0
- ▶ CLKGATE\_PRESENT = 1
- ▶ RESET\_ALL\_REGS = 0
- ▶ OBSERVATION = 0
- ▶ WIC\_PRESENT = 1
- ▶ WIC\_LINES = 20

## RELATED DOCUMENTS

Additional ARM Cortex-M3 processor related documentations are

- ▶ Cortex-M3 Devices, *Generic User Guide*, Arm DUI 0552A (ID121610)
- ▶ Cortex-M3 Revision r2p0 *Technical Reference Manual* (DDI 0337)
- ▶ *ARM Core Cortex-M3/Cortex-M3 with ETM (AT420/AT425) Errata Notice*
- ▶ *Armv7-M Architecture Reference Manual* (DDI 0403)

**ARM CORTEX-M3 PROCESSOR**

- *Arm Debug Interface Architecture Specification v5 (IHI 0031)*

## EXCEPTIONS AND INTERRUPTS

### ARM CORTEX-M3 PROCESSOR AND FAULT MANAGEMENT

The ARM Cortex-M3 processor supports a number of system exceptions, peripherals, and external interrupts, as shown in [Table 3](#) and [Table 4](#).

If the appropriate handler for the fault conditions listed in [Table 3](#) is not enabled in the system handler control and state register (SHCSR), these detected fault conditions are escalated to a hard fault.

**Table 3. System Exceptions**

Vector Table Position	Type	Priority	Description	Functional Safety Requirement <sup>1</sup>
1	Reset	-3 (highest)	Any reset. For functional safety relevant applications, the user checks the reset status register to verify that the reset status is as expected and takes appropriate action on their exception handler to service the relevant interrupt.	Safety Measure (SM) 42, SM230
2	Reserved	Not applicable		
3	Hard fault	-1	All fault conditions, if the corresponding fault handler is not enabled. For functional safety relevant applications, the user places the device in a safe state if any unknown exceptions occur.	SM43
4	Memory management fault	Programmable	Memory management fault. Access to illegal locations.	SM45
5	Bus fault	Programmable	Prefetch fault, memory access fault, and other address and memory related faults. This exception occurs if there is a problem reading or writing with the AHB. For functional safety relevant applications, the user places the device in a safe state if a bus fault occurs. For example, detected ECC errors that are uncorrected cause this exception to occur.	SM45
6	Usage fault	Programmable	Faults such as undefined instruction executed or illegal state transition attempt. For functional safety relevant applications, the user places the device in a safe state if a usage exception occurs to prevent undefined behavior.	SM46
7 to 10	Reserved	Not applicable		
11	SVCALL	Programmable	System service call with supervisor calls instruction.	SM77
12	Debug monitor	Programmable	Debug monitor (breakpoint, watchpoint, or external debug requests).	SM77
13	Reserved	Not applicable		
14	PENDSV	Programmable	Pendable request for system service.	
15	SYSTICK	Programmable	System tick timer.	SM50
16	Interrupt request (IRQ)	Programmable	ADuCM330WFS/ADuCM331WFS interrupts controlled by the NVIC.	

<sup>1</sup> The blank rows in this column mean that the configuration of the vector table position(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the vector table position(s) and develop additional fault detection and control mechanisms as necessary.

### NESTED VECTORED INTERRUPT CONTROLLER

The ADuCM330WFS/ADuCM331WFS interrupts are controlled by the NVIC, and four levels of priority are available. NVIC interrupts can be enabled and disabled by writing to their corresponding interrupt set enable or interrupt clear enable register bit field. Only a limited number of interrupts can wake up the core from low power hibernate mode. These interrupts are described in [Table 4](#). When the ADuCM330WFS/ADuCM331WFS wake up from any mode, the device returns to active mode.

**Table 4. Interrupt Vectors**

Position No.	Priority	Vector	Wake Up Core from Hibernate Mode	Functional Safety Requirement <sup>1</sup>
0	Programmable	Wake-up timer interrupt	Yes	SM60
1	Programmable	External Interrupt 0 (P0.3)	Yes	SM77
2	Programmable	External Interrupt 1 (P0.4)	Yes	SM77
3	Programmable	Watchdog timer interrupt	Yes	SM41

## EXCEPTIONS AND INTERRUPTS

**Table 4. Interrupt Vectors (Continued)**

Position No.	Priority	Vector	Wake Up Core from Hibernate Mode	Functional Safety Requirement <sup>1</sup>
4	Programmable	General-Purpose Timer 0 interrupt	No	SM60
5	Programmable	ADC interrupt	No	SM90, SM91, SM92, SM96, SM98, SM100, SM101, SM102, SM106, SM107
6	Programmable	Flash interrupt	No	SM162, SM152
7	Programmable	SPI interrupt	No	SM77
8	Programmable	LIN0: LIN header or frame interrupt	No	
9	Programmable	LIN1: LIN error detected interrupt	No	SM30 through SM35, SM37
10	Programmable	LIN2: LIN sleep or wake-up event interrupt	Yes	
11	Programmable	High voltage interface interrupt	No	SM35
12	Programmable	Low frequency oscillator calibration interrupt	No	SM20
13	Programmable	SRAM ECC interrupt	No	SM172
14	Programmable	Unused interrupt	No	SM77
15	Programmable	Unused interrupt	No	SM77
16	Programmable	Unused interrupt	No	SM77

<sup>1</sup> The blank rows in this column mean that the configuration of interrupts may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the interrupts and develop additional fault detection and control mechanisms as necessary.

For the ADuCM330WFS/ADuCM331WFS, each interrupt can have eight levels of priority. The priority levels are 0 to 7, where 0 is the highest priority and 7 is the lowest priority. Internally, the highest user programmable priority (0) is treated as fourth priority, after a reset, an NMI, and a hardware fault. Zero is the default priority for all the programmable priorities.

If the same priority level is assigned to two or more interrupts, their hardware priority (the lower the position number, the higher the priority, as shown in Table 4) determines the order in which the processor activates them. For example, if both the ADC and SPI are Priority Level 1, the ADC has higher priority.

## SETTING INTERRUPT PRIORITIES

The ARM Cortex-M3 IPR0 register to IPR3 register control the interrupt priority settings for the ADuCM330WFS/ADuCM331WFS. The user can adjust these registers to change the default interrupt priority and to create a user specific interrupt vector table to suit the application of the user.

Every interrupt has eight possible priority levels, with 0 being the highest priority and 7 being the lowest priority setting. Each interrupt priority register supports four interrupt sources. Table 5 uses IPR0 as an example to explain the relevant bits.

The IPR1 to IPR3 interrupt priority registers are configured similarly, with default priority according to Table 4.

**Table 5. Bit Descriptions for the Interrupt Priority Register, IPR0**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[31:29]	Watchdog timer	000: highest interrupt priority level for watchdog timer 111: lowest interrupt priority level The watchdog timer must be configured to cause a reset	
[28:24]	Reserved	Reserved	
[23:21]	EXTINT1	000: highest interrupt priority level for external IRQ1 111: lowest interrupt priority level	
[20:16]	Reserved	Reserved	
[15:13]	EXTINT0	000: highest interrupt priority level for external IRQ0 111: lowest interrupt priority level	
[12:8]	Reserved	Reserved	
[7:5]	Wake-up timer	000: highest interrupt priority level for wake-up timer	

## EXCEPTIONS AND INTERRUPTS

**Table 5. Bit Descriptions for the Interrupt Priority Register, IPR0 (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		111: lowest interrupt priority level	
[4:0]	Reserved	Reserved	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## ARM CORTEX-M3 PROCESSOR AND NVIC REGISTERS

The interrupt set enable register (ISER0) and the interrupt clear enable register (ICER0) enable and disable the interrupts. The interrupt set pending register (ISPR0) and the interrupt clear pending register (ICPR0) pend the interrupts. The ISER0 register, ICER0 register, ISPR0 register, and ICPR0 register use a write 1 to enable and a write 1 to clear policy. Each bit in the interrupt set enable register corresponds to one of 32 interrupts. Setting a bit in the interrupt set enable register enables the interrupt.

When the enable bit of a pending interrupt is set in the interrupt set pending register, the processor activates the interrupt based on the priority of the interrupt. However, if the corresponding bit is clear in the set enable register, asserting the interrupt signal pends the interrupt, but it is not possible to activate the interrupt, regardless of its priority.

Pending the interrupt means that, if the interrupt occurs, it is possible for the user code to investigate the interrupt set pending register and verify whether the interrupt occurs. Therefore, a disabled interrupt can serve as a latched general-purpose bit.

Reading and clearing interrupts occur without invoking an interrupt.

Clear the enable state by writing a 1 to the corresponding bit in the interrupt clear enable register. This write also clears the corresponding bit in the interrupt set enable register. Writing to the interrupt clear pending register has no effect on an interrupt that is active, unless the interrupt is also pending. If an interrupt is active when it is disabled, the interrupt remains in its active state until cleared by a reset or an exception return.

The NVIC is an integral part of the ARM Cortex-M3 processor. The NVIC is notified that an interrupt is generated from peripherals within one clock cycle of the clock used by this peripheral, unless otherwise noted.

**Table 6. ARM Cortex-M3 Processor Registers and NVIC Registers**

Analog Devices Header				
Address	File Name	Description	Access	Functional Safety Requirement <sup>1</sup>
0xE000E004	ICTR	Shows the number of interrupt lines that the NVIC supports	Read	
0xE000E010	STCSR	SYSTICK control and status register	Read/write	SM50
0xE000E014	STRVR	SYSTICK reload value register	Read/write	SM50
0xE000E018	STCVR	SYSTICK current value register	Read/write	SM50
0xE000E01C	STCR	SYSTICK calibration value register	Read	SM50
0xE000E100	ISER0	Set IRQ0 to IRQ13 enable	Read/write	See assumptions of use in the ADuCM330WFS/ADuCM331WFS safety manual
0xE000E180	ICER0	Clear IRQ0 to IRQ13 enable	Read/write	See assumptions of use in the ADuCM330WFS/ADuCM331WFS safety manual
0xE000E200	ISPR0	Set IRQ0 to IRQ13 pending	Read/write	
0xE000E280	ICPR0	Clear IRQ0 to IRQ13 pending	Read/write	
0xE000E300	IABR0	IRQ0 to IRQ13 active bits	Read/write	
0xE000E400	IPR0	IRQ0 to IRQ3 priority	Read/write	
0xE000E404	IPR1	IRQ4 to IRQ7 priority	Read/write	
0xE000E408	IPR2	IRQ8 to IRQ11 priority	Read/write	
0xE000E40C	IPR3	IRQ12 to IRQ13 priority	Read/write	
0xE000ED00	CPUID	Central processing unit identification (CPUID) base register	Read	
0xE000ED04	ICSR	Interrupt control and status register	Read/write	
0xE000ED08	VTOR	Vector table offset register	Read/write	

## EXCEPTIONS AND INTERRUPTS

**Table 6. ARM Cortex-M3 Processor Registers and NVIC Registers (Continued)**

Analog Devices Header				
Address	File Name	Description	Access	Functional Safety Requirement <sup>1</sup>
0xE000ED0C	AIRCR	Application interrupt and reset control register	Read/write	
0xE000ED10	SCR	System control register	Read/write	
0xE000ED14	CCR	Configuration control register	Read/write	
0xE000ED18	SHPR1	System Handlers Register 1	Read/write	
0xE000ED1C	SHPR2	System Handlers Register 2	Read/write	
0xE000ED20	SHPR3	System Handlers Register 3	Read/write	
0xE000ED24	SHCSR	System handler control and state	Read/write	
0xE000ED28	CFSR	Configurable fault status	Read/write	
0xE000ED2C	HFSR	Hard fault status	Read/write	SM43
0xE000ED34	MMAR	Memory manage address	Read/write	SM45
0xE000ED38	BFAR	Bus fault address	Read/write	SM45
0xE000EF00	STIR	Software trigger interrupt register	Write	

<sup>1</sup> The blank rows in this column mean that the configuration of registers may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the registers and develop additional fault detection and control mechanisms as necessary.

## EXTERNAL INTERRUPT CONFIGURATION

Two external interrupts are implemented. The interrupts can be separately configured to detect any combination of the following types of events:

- ▶ Rising edge. The logic detects a transition from low to high and generates a pulse. Only one pulse is sent to the ARM Cortex-M3 processor per rising edge.
- ▶ Falling edge. The logic detects a transition from high to low and generates a pulse. Only one pulse is sent to the ARM Cortex-M3 processor per falling edge.
- ▶ Rising or falling edge. The logic detects a transition from low to high or from high to low and generates a pulse. Only one pulse is sent to the ARM Cortex-M3 processor per edge.
- ▶ High level. The logic detects a high level. The appropriate interrupt is asserted and sent to the ARM Cortex-M3 processor. The interrupt line is held asserted until the external source deasserts. The high level must be maintained for one core clock cycle minimum to be detected.
- ▶ Low level. The logic detects a low level. The appropriate interrupt is asserted and sent to the ARM Cortex-M3 processor. The interrupt line is held asserted until the external source deasserts. The low level must be maintained for one core clock cycle minimum to be detected.

The external interrupt detection unit block allows an external interrupt to wake up the device when in hibernate mode.

## EXTERNAL INTERRUPT CONFIGURATION MEMORY MAPPED REGISTERS

The interrupt detection unit consists of memory mapped registers (MMRs) contained in the always on section. The MMRs are based at Address 0x40002400.

**Table 7. Interrupt Detection Unit Memory Mapped Registers (Base Address 0x40002400)**

Offset	Name	Description	Access	Reset
0x0020	EI0CFG	External interrupt configuration register	Read/write	0x0000
0x0030	EICLR	External interrupt clear register	Read/write	0x0000

## External Interrupt Configuration Register

Address: 0x40002420, Reset: 0x0000, Name: EI0CFG

**Table 8. EI0CFG Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:8]	Reserved	Reserved. These bits must be set to 0.	
7	IRQ1EN	External Interrupt 1 enable bit.	

## EXCEPTIONS AND INTERRUPTS

**Table 8. EI0CFG Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		0: external Interrupt 1 disabled. 1: external Interrupt 1 enabled.	
[6:4]	IRQ1MDE	External Interrupt 1 mode registers. 000: rising edge. 001: falling edge. 010: rising or falling edge. 011: high level. 100: low level. 101: falling edge (same as 001). 110: rising or falling edge (same as 010). 111: high level (same as 011).	
3	IRQ0EN	External Interrupt 0 enable bit. 0: external Interrupt 0 disabled. 1: external Interrupt 0 enabled.	
[2:0]	IRQ0MDE	External Interrupt 0 mode registers. 000: rising edge. 001: falling edge. 010: rising or falling edge. 011: high level. 100: low level. 101: falling edge (same as 001). 110: rising or falling edge (same as 010). 111: high level (same as 011).	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## External Interrupt Clear Register

Address: 0x40002430, Reset: 0x0000, Name: EICLR

Ensure that the register write has fully completed before returning from the interrupt handler. Use the data synchronization barrier (DSB) instruction if necessary.

**Table 9. EICLR Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:2]	Reserved	Reserved. These bits must be set to 0.	
1	IRQ1	External Interrupt 1 clear bit. 0: cleared by software. 1: clear external Interrupt 1 flag.	
0	IRQ0	External Interrupt 0 clear bit. 0: cleared by software. 1: clear external Interrupt 0 flag.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## POWER MANAGEMENT UNIT

### POWER MANAGEMENT UNIT FEATURES

Active mode, system halt mode, and hibernate mode are the three power modes available in the ADuCM330WFS/ADuCM331WFS.

To enter system halt mode and hibernate mode, the ARM Cortex-M3 processor uses sleep mode (system halt) and deep sleep mode (hibernate) as power saving modes. Sleep mode stops the memory related clock (HCLK) and the peripheral clock (PCLK). Deep sleep mode stops the high frequency oscillator, resulting in all clocks being stopped. In addition, the flash memory is power gated and the high power low dropout regulator is switched off.

### POWER MANAGEMENT UNIT OVERVIEW

The power management unit (PMU) controls the power modes of the ADuCM330WFS/ADuCM331WFS. The ARM Cortex-M3 processor sleep modes are linked to the PMU modes and are described in this section.

The PMU is always powered on. Three power modes are available: a fully functional active mode plus two modes that provide a power reduction benefit with a corresponding reduction in functionality. System halt mode provides significant power reduction with further power savings possible in hibernate mode. [Table 10](#) lists all the power modes available. For active mode and hibernate mode, current values and wake-up times are available in the ADuCM330WFS/ADuCM331WFS data sheet.

*Table 10. System Power Mode Summary*

Mode	Description
Active	Default.
System halt	Gate both HCLK and PCLK when ARM Cortex-M3 processor is in sleep mode.
Hibernate	Gate power to flash block, high frequency oscillator clock is gated, low frequency oscillator is active.

The Arm wait for interrupt (WFI) instruction places the ARM Cortex-M3 processor in sleep mode (system halt). Program execution is suspended until a nonmasked interrupt occurs. If deep sleep mode is enabled in the system control register of the ARM Cortex-M3 processor, the ARM Cortex-M3 processor enters deep sleep mode on execution of WFI. Otherwise, the ARM Cortex-M3 processor enters sleep mode.

The PMU and ARM Cortex-M3 processor power modes are summarized in [Table 11](#).

The SPI peripheral must be disabled before entering low power modes where the PCLK (LIN, SPI, high voltage interface, and timers) is disabled. Disabling the peripheral resets the state machine of these peripherals while keeping their configurations.

The debugger must be disconnected to achieve lower power performance.

The following is a typical code example for achieving low power mode (.hibernate mode):

```

SCR      = 0x04;          // Enable deep sleep mode in the core
                        // (system control register (Address 0xE000ED10))
PWRKEY   = 0x4859;
PWRKEY   = 0xF27B;        // PWRMOD keys
PWRMOD   = 0x5;           // Hibernate Mode
__dsb();                // Wait until all memory accesses complete
__wfi();                // Wait for interrupt

```

### POWER MANAGEMENT UNIT LDO SWITCHING

Three LDO regulators are integrated on the ADuCM330WFS/ADuCM331WFS.

- ▶ The high voltage LDO regulator regulates voltages from 12 V to 3.3 V.
- ▶ The high power LDO regulator regulates voltages from 3.3 V to 1.8 V and supplies the device in active mode.
- ▶ The low power LDO regulates voltages from 3.3 V to 1.8 V and achieves an extremely low quiescent current. However, the low power LDO regulator can only supply very low load currents and is used in hibernate mode.

Switching between the LDO regulators is done automatically after the change from active mode to hibernate mode is performed.

## POWER MANAGEMENT UNIT

### POWER MANAGEMENT UNIT POWER MODES OPERATION

#### Power Mode: Active Mode

The system is fully active with all of the clocks described in [Figure 2](#) available, memories and all user enabled peripherals are clocked, and the ARM Cortex-M3 processor executes instructions. The ARM Cortex-M3 processor has the capability to manage the internal clocks. Therefore, the ARM Cortex-M3 processor can be in a partial clock gated state. Clock gating affects only the internal ARM Cortex-M3 processor processing core. Automatic clock gating is used on all blocks and is transparent to the user. User code can use a WFI command to place the ARM Cortex-M3 processor in sleep mode. The WFI command is independent of the power mode settings of the PMU. When the ADuCM330WFS/ADuCM331WFS wake from any of the low power modes, the device returns to active mode.

#### Power Mode: System Halt Mode

The system gates the flash, HCLK, and PCLK at an early stage after the ARM Cortex-M3 processor enters sleep mode. The ARM Cortex-M3 processor FCLK is active, the NVIC is operational, and activity on this block wakes up the device.

#### Power Mode: Hibernate Mode

The system gates power to the digital flash memory. All states are retained during this power gating. In hibernate mode, FCLK, HCLK, and PCLK are clock gated at an early stage after the ARM Cortex-M3 processor has entered deep sleep mode, resulting in a lower leakage current. Due to the clock gating, the time to wake the device from hibernate mode compared with system halt mode is longer. With FCLK stopped, only the peripherals listed in [Table 4](#) are able to wake up the ARM Cortex-M3 processor. Bit 2 of the ARM Cortex-M3 processor system control register (Address 0xE000ED10) must be set to 1 to enter deep sleep mode and cleared to 0 for sleep mode by the user.

**Table 11. Power Modes Summary**

Clock and Power	Active	System Halt	Hibernate
High Power LDO	On	On	Off
Low Power LDO	Off	Off	On
High Frequency Oscillator	On	On	Off
Low Frequency Oscillator	On	On	On
Power Gate	On	On	Off
UCLK	On	On	Off
FCLK	On	On	Off
HCLK	On	Off	Off
PCLK	On	Off	Off
ADC Interface Clock (ACLK)	On	On	Off
SRAM	On	On	On
ARM Cortex-M3	Active	Sleep	Deep sleep

### POWER SUPPLY SUPPORT CIRCUITS

The ADuCM330WFS/ADuCM331WFS incorporate three on-chip, LDO regulators. One regulator is driven directly from the battery voltage to generate a 3.3 V internal supply, which is used as the supply for two internal 1.8 V LDO regulators. The two 1.8 V LDO regulators allow normal mode (high power LDO) and low power mode (low power LDO) operation. The high power LDO regulator requires two output capacitors on DVDD18 and AVDD18. Refer to the schematic diagram of external components recommended for proper operation in the ADuCM330WFS/ADuCM331WFS data sheet for details. The effective series resistance (ESR) of the output capacitor affects the stability of the LDO control loop. A capacitor with a low ESR is recommended to ensure the stability of the regulators.

A power-on reset (POR) function is provided to ensure the safe operation of the processor, as well as continuous monitoring of the battery power supply. When the supply voltage on VDD reaches a typical operating voltage threshold, a POR signal keeps the ARM Cortex-M3 processor in a reset state for a defined time (see [Figure 1](#)). This delay ensures that the regulated power supply voltage (DVDD33) applied to the ARM Cortex-M3 processor and the associated peripherals is greater than the minimum operational voltage, thereby guaranteeing full functionality.

## POWER MANAGEMENT UNIT

A POR flag is set in the RSTSTA MMR to indicate that a POR reset event has occurred. At voltages below the POR level voltage, the SRAM may be corrupted. The implemented ECC in the SRAM ensures that a corruption can be detected by the kernel. If the SRAM is corrupted, the kernel initializes the entire SRAM to 0x00 and corrects all ECC bits.

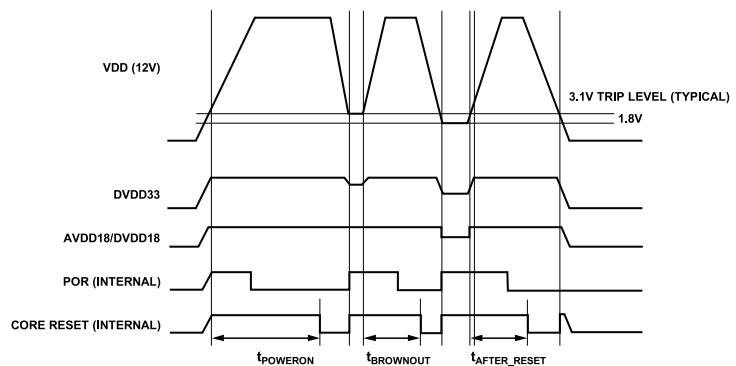


Figure 1. Power Supply Diagram

## POWER MODES MEMORY MAPPED REGISTERS

The power modes are controlled by a single register based in the always on section at Address 0x40002400.

Table 12. Power Modes Memory Mapped Register (Base Address 0x40002400)

Offset	Name	Description	Access	Reset
0x0000	PWRMOD	Power mode control register	Read/write	0x00
0x0004	PWRKEY	Power mode key register	Read/write	Not applicable

### Power Mode Control Register

Address: 0x40002400, Reset: 0x00, Name: PWRMOD

Table 13. PWRMOD Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirements <sup>1</sup>
7	Reserved	Reserved. This bit must be set to 0.	
6	HFOSC_LPM	Enables high or low precision mode in the 16.384 MHz high frequency oscillator. This bit must be set to 0 for functional safety relevant applications. 0: enable high precision 1% (high precision oscillator). 1: enable low precision 3% (low precision oscillator).	SM20, SM21
[5:3]	Reserved	Reserved. These bits must be set to 0.	
[2:0]	MOD	Power mode control bits. These bits select the power mode to enter. When read, these bits contain the last power mode value entered by user code. 000: active (normal mode). 011: system halt. The ARM Cortex-M3 processor deep sleep mode has no effect in system halt mode. Before entering system halt mode with ADCs active, deep sleep mode must be enabled in the ARM Cortex-M3 processor system control register. 101: hibernate. To enter hibernate mode, the user also sets Bit 2 (SLEEPDEEP) in the ARM Cortex-M3 processor system control register (Address 0xE000ED10) to 1 to place the ARM Cortex-M3 processor in deep sleep mode. Other: reserved. Only the other three modes must be selected.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### Power Mode Key Register

Address: 0x40002404, Reset: not applicable, Name: PWRKEY

**POWER MANAGEMENT UNIT****Table 14. PWRKEY Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	Value	Power modes key register. The PWRMOD register is key protected. Two writes to the key are necessary to change the value in the PWRMOD register: 0x4859, followed by 0xF27B. Following these writes, the PWRMOD register can be written.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## SYSTEM CLOCKS

### SYSTEM CLOCKS FEATURES

The ADuCM330WFS/ADuCM331WFS integrate two internal clock sources, a high frequency oscillator, and a low frequency oscillator.

The high frequency oscillator is a 16.384 MHz oscillator that can operate in two modes, high precision mode and low precision mode with reduced power consumption.

The low frequency oscillator is a 32.768 kHz low power, internal oscillator.

### SYSTEM CLOCKS OVERVIEW


The CLKCON MMR controls the clocking source to the ADuCM330WFS/ADuCM331WFS. The CLKCON MMR does not control which clocks are enabled.

One of the outputs of the clock generation circuit is directed through the clock divider (CD) circuit (the CD bit in the CLKCON MMR), where the UCLK can be divided down to a minimum of  $16.384\text{ MHz} \div 2$  (for high frequency oscillator) by the user. This clock is referred to as the core clock within the ADuCM330WFS/ADuCM331WFS, and is the clock that drives the ARM Cortex-M3 processor. This clock is gated even further to all the digital peripherals in the system (PCLK), the NVIC (FCLK), and the ADC (ACLK).

Internally, the system clock is divided into five clocks.

- ▶ UCLK system clock
- ▶ FCLK for the core
- ▶ HCLK for the flash, SRAM
- ▶ PCLK for the LIN, SPI, high voltage interface, and timers
- ▶ ACLK for the ADC interface

[Figure 2](#) shows all the clocks available and includes clock gates for power management. More information on the clock gates is available in the [Power Management Unit](#) section.

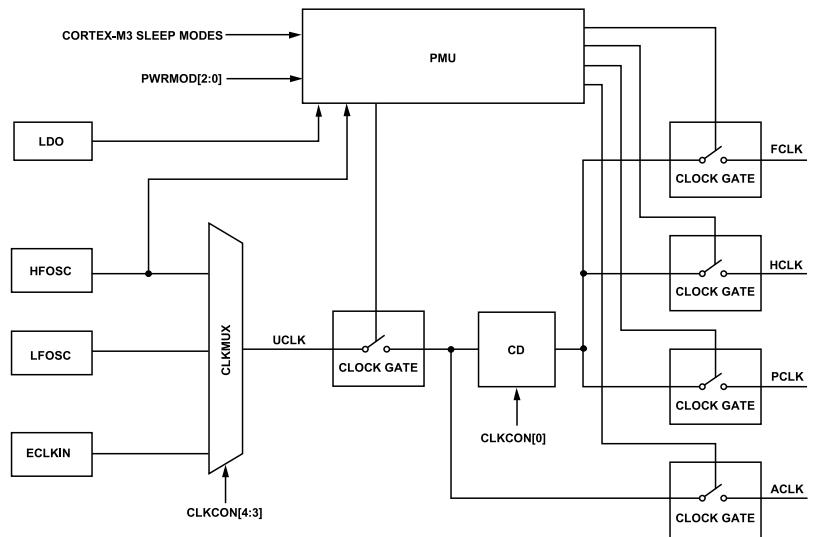

*Figure 2. System Clock Architecture Block Diagram*

### SYSTEM CLOCKS OPERATION

At power-up, the core executes from the high frequency oscillator internal oscillator in high precision mode. User code can select the clock source for the system clock and can divide the clock by a factor of 2. Dividing the clock allows slower code execution and reduced power consumption. UCLK is also passed to some of the serial peripherals so that the timings are not affected by CD changes.

## SYSTEM CLOCKS

### SYSTEM CLOCKS MEMORY MAPPED REGISTERS

*Table 15. Clock Control Memory Mapped Register*

Address	Name	Description	Access	Reset
0x40002000	CLKCON	System clocks control register	Read/write	0x00E0

#### System Clocks Control Register

Address: 0x40002000, Reset: 0x00E0, Name: CLKCON

*Table 16. CLKCON Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:8]	Reserved	Reserved. These bits must be set to 0.	
[7:5]	Reserved	Reserved. These bits must be set to 0b111.	
[4:3]	CLKMUX	Clock in multiplexer selection bits. These bits must be set to 0 for functional safety relevant applications. 00: high frequency oscillator (default). 01: high frequency oscillator. 10: low frequency oscillator. 11: external clock (ECLKIN), Pin 8.	SM20, SM21
[2:1]	Reserved	Reserved. These bits must be set to 0.	
0	CD	Clock divide bit. This bit must be set to 0 for functional safety relevant applications. 0: UCLK. 1: UCLK ÷ 2.	SM20, SM21

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## HIGH FREQUENCY OSCILLATOR CALIBRATION

For functional safety relevant applications, do not use the high frequency oscillator calibration functionality described in this section.

The ADuCM330WFS/ADuCM331WFS on-chip, 16 MHz high frequency oscillator can be calibrated using the LIN interface.

A number of MMR registers control the trimming in normal mode and power-down mode (see [Table 17](#)). These registers are protected and are writable only following a write to the key register, LINCALLOCK. The LINCALSTA register is a read only register that shows which mode is currently active. This information is held in Register LINCALSTA, Bit 0. Register LINCALSTA, Bits[2:1] can also be used to determine if the LPTRIM value or HPTRIM value has been altered by the system since the LINCALSTA register was last read. The high frequency oscillator can be trimmed in either low or high precision mode (set by Register PWRMOD, Bit 6).

There are two modes of trimming: user trim mode and system trim mode.

### User Trim Mode

User trim mode allows any trim register values to be written and downloaded by the user. This mode is always the first trim mode. Factory calculated trim values are automatically contained within trim registers as the default.

The required value is written to the LINCALVAL0 register and the LINCALVAL1 register. In user trim mode, these values automatically match the values in the LINCALVAL2 register and the LINCALVAL3 register. The values in the LINCALVAL2 and LINCALVAL3 read only registers are sent to the oscillator.

LINCALVAL0 and LINCALVAL1 are key protected and require two sequential writes: write the unlock key to the LINCALLOCK register followed by the desired trim value to LINCALVAL0 or LINCALVAL1.

The following is an example of how to program a user trim value:

```
LINCALLOCK = LIN_CAL_KEY;          // Unlock key protection
LINCALVAL0 = 0x7B;                  // Write trim values 0x7B to trim high frequency oscillator low precision
```

## SYSTEM CLOCKS

```
sion mode
LINCALOCK = LIN_CAL_KEY;      // Unlock key protection
LINCALVAL1 = 0x200;           // Write trim values 0x200 to trim high frequency oscillator high precision mode
```

It is not advisable to write values to these registers unless it is fully understood the effect such a write has on the oscillator frequency. Invalid values can result in corruption of flash data when written.

### System Trim Mode

System trim mode allows a calibration of the clock relative to the LIN baud rate of the system. This mode can be used to achieve greater accuracy from either the normal mode or low power mode. System trim mode cannot operate if there are no LIN communications. The ADuCM330WFS/ADuCM331WFS automatically adapt to download internally calculated trim values to operate within >1% accuracy over the full operating range as long as there is at least one LIN transaction for every 10°C of change.

After the user trim mode is set at startup, setting the device into system trim mode overrides the user set trim values with iteratively calculated values derived from LIN communications.

Using the LIN baud rate, the device determines the accuracy of the trim value and automatically increments or decrements a step each time a valid LIN communication occurs within a set window of calibration. The calibration window is defined from values set in the LINCALMINL register and the LINCALMINH register, as well as the LINCALMAXL register and LINCALMAXH register, and from the number of steps defined in the LINCALCON register (key protected). The user sets these values. In system trim mode, LINCALVAL2 and LINCALVAL3 may not match LINCALVAL0 and LINCALVAL1.

The following is a typical sequence for starting system trim mode:

```
LINCALMIN = EXPECTED_LINBR_VALUE-0x20;    //Define tolerance
LINCALMAX = EXPECTED_LINBR_VALUE+0x20;    //Define tolerance
LIN_CAL_LOCK = LIN_CAL_KEY;                // unlock key protection
LINCALCON = 0x1;                           // Enable LIN calibration mode with step size = 1
```

## HIGH FREQUENCY OSCILLATOR CALIBRATION MEMORY MAPPED REGISTERS

*Table 17. High Frequency Oscillator Calibration Memory Mapped Registers (Base Address 0x40005C00)*

Offset	Name	Description	Access	Reset
0x0000	LINCALCON	LIN calibration control register	Read/write	0x0000
0x001C	LINCALSTA	System calibration status register	Read	0x0000
0x0004	LINCALVAL0	User calibration value register (low precision mode)	Read/write	0x0000
0x0008	LINCALVAL1	User calibration value register (high precision mode)	Read/write	0x0000
0x0020	LINCALVAL2	System calibration value register (low precision mode)	Read	0xFFFF
0x0024	LINCALVAL3	System calibration value register (high precision mode)	Read	0xFFFF
0x0014	LINCALMINL	Minimum control window register, Bits[15:0]	Read/write	0x0000
0x0018	LINCALMINH	Minimum control window register, Bits[18:16]	Read/write	0x0000
0x000C	LINCALMAXL	Maximum control window register, Bits[15:0]	Read/write	0x0000
0x0010	LINCALMAXH	Maximum control window register, Bits[18:16]	Read/write	0x0000
0x0028	LINCALLOCK	Calibration lock register	Read/write	0x0000

### LIN Calibration Control Register

Address: 0x40005C00, Reset: 0x0000, Name: LINCALCON

## SYSTEM CLOCKS

**Table 18. LINCALCON Register Bit Descriptions (Key Protected)**

Bits	Name	Description	Functional Safety Requirements <sup>1</sup>
[15:3]	Reserved	Reserved. These bits must be set to 0.	
[2:1]	Step	System mode oscillator trim step. 00: one step. 01: two steps. 10: three steps. 11: four steps.	
0	CALMODE	Calibration mode. This bit must be set to 0 for functional safety relevant applications. 0: user mode. This setting uses factory calibrated trim values by default. 1: system mode. For high frequency oscillator calibration from a LIN synchronization field.	SM20, SM21

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## System Calibration Status Register

Address: 0x40005C1C Reset: 0x0000, Name: LINCALSTA

**Table 19. LINCALSTA Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:3]	Reserved	Reserved.	
2	LPACC	This bit allows the user to monitor accuracy in low precision mode. 0: reset during a read operation. 1: set when LINCALVAL2 is altered.	
1	HPACC	This bit allows the user to monitor accuracy in high precision mode. 0: reset during a read operation. 1: set when LINCALVAL3 is altered.	
0	PWRMODE	High precision oscillator power mode selected for calibration. 0: high precision and power mode. 1: lower precision and power mode.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## User Calibration Value Register (Low Precision Mode)

Address: 0x40005C04, Reset: 0x0000, Name: LINCALVAL0

**Table 20. LINCALVAL0 Register Bit Descriptions (Key Protected)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:9]	Reserved	Reserved. These bits must be set to 0.	
[8:0]	LPTRIM	The 9-bit, user trim value used in low precision mode.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## User Calibration Value Register (High Precision Mode)

Address: 0x40005C08, Reset: 0x0000, Name: LINCALVAL1

## SYSTEM CLOCKS

**Table 21. LINCALVAL1 Register Bit Descriptions (Key Protected)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:9]	Reserved	Reserved. These bits must be set to 0.	
[8:0]	HPTRIM	The 9-bit, user trim value used in high precision mode.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## System Calibration Value Register (Low Precision Mode)

Address: 0x40005C20, Reset: 0xFFFF, Name: LINCALVAL2

**Table 22. LINCALVAL2 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:9]	Reserved	Reserved.	
[8:0]	LPTRIM	The 9-bit, LIN calibration trim value used by the high frequency oscillator in low precision 3% mode.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## System Calibration Value Register (High Precision Mode)

Address: 0x40005C24, Reset: 0xFFFF, Name: LINCALVAL3

**Table 23. LINCALVAL3 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:9]	Reserved	Reserved.	
[8:0]	HPTRIM	The 9-bit, LIN calibration trim value used by the high frequency oscillator in high precision 1% mode.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## Minimum Control Window Register, Bits[15:0]

0x40005C14, Reset: 0x0000, Name: LINCALMINL

**Table 24. LINCALMINL Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	MINSYNC	Minimum tolerance value for the high frequency oscillator system trim.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## Minimum Control Window Register, Bits[18:16]

Address: 0x40005C18, Reset: 0x0000, Name: LINCALMINH

**Table 25. LINCALMINH Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:3]	Reserved	Reserved. These bits must be set to 0.	
[2:0]	MINSYNC	Minimum tolerance value for the high frequency oscillator system trim. Bits[18:16] with respect to LINCALMINL.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## SYSTEM CLOCKS

### Maximum Control Window Register, Bits[15:0]

Address: 0x40005C0C, Reset: 0x0000, Name: LINCALMAXL

*Table 26. LINCALMAXL Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	MAXSYNC	Maximum tolerance value for the high frequency oscillator system trim.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### Maximum Control Window Register, Bits[18:16]

Address: 0x40005C10, Reset: 0x0000, Name: LINCALMAXH

*Table 27. LINCALMAXH Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:3]	Reserved	Reserved. These bits must be set to 0.	
[2:0]	MAXSYNC	Maximum tolerance value for the high frequency oscillator system trim. Bits[18:16] with respect to LINCALMAXL.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### Calibration Lock Register

Address: 0x40005C28, Reset: 0x0000, Name: LINCALOCK

*Table 28. LINCALOCK Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	Lock	This lock register must be written with the unlock key, 0x1324, immediately before the desired value is written to any key protected register.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## LOW FREQUENCY OSCILLATOR CALIBRATION

The accuracy of the 32.768 kHz low frequency oscillator can be improved using the high precision, 16 MHz high frequency oscillator.

The hardware counts the number of high frequency oscillator clocks in a specified number of low frequency oscillator clock periods, and the results are compared. If the count is longer or shorter, the oscillator trim value is incremented or decremented accordingly. The user must manually iterate this procedure until no further increments or decrements are possible, or until the results are outside the maximum and minimum calibration register values.

The dedicated calibration MMRs are shown in [Table 29](#).

At the end of the time base period, the value of EXPCLK (Register TRMUCTGT, Bits[12:0]) and UCLKCNT (Register TRMUCTCNT, Bits[12:0]) are compared within the tolerance specified by TOLSEL (Register TRMCON, Bit 5). The tolerance can be set at a wider tolerance (32 counts) or a tighter tolerance (16 counts). If the EXPCLK and UCLKCNT values are within this set tolerance, no further increment or decrement occurs.

Otherwise,

If UCLKCNT > EXPCLK + 16(1 + TOLSEL), the trim value increments by 1 as the low frequency oscillator runs slow.

If UCLKCNT < EXPCLK - 16(1 + TOLSEL), the trim value decrements by 1 as the low frequency oscillator runs fast.

TOLSEL is either 0 or 1.

The value for EXPCLK can be calculated using the following equation:

## SYSTEM CLOCKS

$$EXPCLK = MAXLFOSC \times (f_{UCLK}/f_{LFOSC})$$

(1)

where:

$MAXLFOSC$  is the number of low frequency oscillator clocks to count.

$f_{UCLK}$  is the frequency of the UCLK.

$f_{LFOSC}$  is the frequency of the low frequency oscillator.

The maximum trim value is factory set. There is no option to modify the maximum trim value. If the user exceeds the maximum trim value, the value reverts to factory settings. The minimum trim value is user programmable. If the high frequency oscillator is disabled, the current trim cycle is immediately aborted, with the trim value unaffected.

## LOW FREQUENCY OSCILLATOR CALIBRATION MEMORY MAPPED REGISTERS

Table 29. Low Frequency Oscillator Trim Memory Mapped Registers (Base Address 0x40009C00)

Offset	Name	Description	Access	Reset
0x0000	TRMSTA	Low frequency oscillator calibration status register	Read	0x00
0x0004	TRMCON	Low frequency oscillator calibration control register	Read/write	0x00
0x0008	TRMMXC	Maximum calibration value register	Read	0x3F
0x000C	TRMMNC	Minimum calibration value register	Read/write	0x00
0x0010	TRMVAL	Oscillator trim value register	Read/write	0XX
0x0014	TRM32TGT	Low frequency oscillator target count register	Read/write	0x00
0x0018	TRM32CNT	Low frequency oscillator current count register	Read	0x00
0x001C	TRMUCTGT	UCLK target count register	Read/write	0x0000
0x0020	TRMUCTCNT	UCLK current count register	Read	0x0000

### Low Frequency Oscillator Calibration Status Register

Address: 0x40009C00, Reset: 0x00, Name: TRMSTA

These bits are automatically cleared after they are read.

Table 30. TRMSTA Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement
[7:6]	Reserved	Reserved.	SM20
5	DECCAL	Last calibration cycle was a decrement (even when minimum is reached or the NOINCDEC bit is set).	SM20
4	INCCAL	Last calibration cycle was an increment (even when maximum is reached or the NOINCDEC bit is set).	SM20
3	MINCAL	Minimum trim value is reached (interrupt source).	SM20
2	MAXCAL	Maximum trim value is reached (interrupt source).	SM20
1	UCNTOF	UCLK count overflow (interrupt source).	SM20
0	CYCEND	Calibration cycle ended (interrupt source). This bit does not indicate that the low frequency oscillator is fully trimmed, only that a single calibration cycle has completed.	SM20

### Low Frequency Oscillator Calibration Control Register

Address: 0x40009C04, Reset: 0x00, Name: TRMCON

Table 31. TRMCON Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
7	Reserved	Reserved. This bit must be set to 0.	
6	NOINCDEC	0: the trim register is incremented or decremented at the end of a calibration cycle. 1: the trim register is not incremented or decremented at the end of a calibration cycle.	SM20
5	TOLSEL	Tolerance select. 0: tolerance of 16. 1: tolerance of 32.	SM20

## SYSTEM CLOCKS

**Table 31.** TRMCON Register Bit Descriptions (Continued)

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
4	Enable	For functional safety relevant applications, this bit must be set to 0. 0: disable the calibration block. 1: enable the calibration block.	SM20
3	MNIRQEN	0: disable the minimum trim value interrupt. 1: enable the minimum trim value interrupt.	SM20
2	MXIRQEN	0: disable the maximum trim value interrupt. 1: enable the maximum trim value interrupt.	SM20
1	UIRQEN	0: disable the UCLK counter overflow interrupt. 1: enable the UCLK counter overflow interrupt.	SM20
0	CIRQEN	0: disable the cycle end interrupt. 1: enable the cycle end interrupt.	SM20

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## Maximum Calibration Value Register

Address: 0x40009C08, Reset: 0x3F, Name: TRMMXC

**Table 32.** TRMMXC Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement
[7:6]	Reserved	Reserved.	SM20
[5:0]	MAXCAL	Maximum trim value (the value in this register is factory set and not user programmable).	SM20

## Minimum Calibration Value Register

Address: 0x40009C0C, Reset: 0x00, Name: TRMMNC

**Table 33.** TRMMNC Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement
[7:6]	Reserved	Reserved. These bits must be set to 0.	SM20
[5:0]	MINCAL	Minimum trim value (the oscillator trim logic does not decrement below the minimum trim value specified in this register).	SM20

## Oscillator Trim Value Register

Address: 0x40009C10, Reset: 0XX, Name: TRMVAL

**Table 34.** TRMVAL Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:6]	Reserved	Reserved. These bits must be set to 0.	SM20
[5:0]	VCOTRIM	Calibration trim value. This defaults to MAXCAL if the value exceeds MAXCAL. During each calibration cycle, this value is increased or decreased by one as necessary.	SM20

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## Low Frequency Oscillator Target Count Register

Address: 0x40009C14, Reset: 0x00, Name: TRM32TGT

## SYSTEM CLOCKS

**Table 35.** TRM32TGT Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:3]	Reserved	Reserved. These bits must be set to 0.	
[2:0]	MAXLFOSC	The number of low frequency oscillator clocks to count. 0 means disable.	SM20

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### Low Frequency Oscillator Current Count Register

Address: 0x40009C18, Reset: 0x00, Name: TRM32CNT

**Table 36.** TRM32CNT Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:3]	Reserved	Reserved.	
[2:0]	LFOSCCNT	Stores the current number of low frequency oscillator clocks.	SM20

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### UCLK Target Count Register

Address: 0x40009C1C, Reset: 0x0000, Name: TRMUCTGT

**Table 37.** TRMUCTGT Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:13]	Reserved	Reserved. These bits must be set to 0.	
[12:0]	EXPCLK	Stores the expected number of high frequency oscillator clocks during the time base	SM20

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### UCLK Current Count Register

Address: 0x40009C20, Reset: 0x0000, Name: TRMUCTCNT

**Table 38.** TRMUCTCNT Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:13]	Reserved	Reserved.	
[12:0]	UCLKCNT	Stores the current number of high frequency oscillator clocks during the time base after the calibration cycle is complete.	SM20

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## KERNEL

The ADuCM330WFS/ADuCM331WFS feature a protected, on-chip kernel.

After a reset event, the hardware calculates a cyclic redundancy check (CRC) signature of the kernel memory space and compares the calculated CRC to the CRC signature programmed during the production test to ensure the integrity of kernel. If an error occurs, the hardware prevents kernel execution.

If the CRC signature is correct, the kernel reads back the factory calibrated data from the manufacturing data space and loads the data into the registers of various on-chip peripherals, such as

- ▶ Precision oscillator
- ▶ Low power oscillator
- ▶ 33VDD, DVDD18, AVDD18
- ▶ Voltage reference
- ▶ ADC Current Channel 0 (ADC0) (offset and gain)
- ▶ ADC Temperature and Voltage Channel 1 (ADC1) (offset and gain)

The following processor registers and user registers are modified by the kernel and are different from the POR default values:

- ▶ R0 to R15
- ▶ GP0CON
- ▶ FEEADR, FEEDATL, FEEDATH, FEECON0, FEECON1, FEESIGN
- ▶ HVDAT, HVCON
- ▶ HVDCFG0

The ADuCM330WFS/ADuCM331WFS feature an on-chip LIN downloader. Downloader exit and kernel entry can only occur via a reset. During kernel execution, SWD access is disabled. Before exiting to user code, the kernel checks if the SWD lock location of the uppermost page in flash contains the key value, 0x160320 (see [Figure 8](#) for more information). If this key is present, SWD access is not granted after kernel exit. If any other value is present, SWD access is enabled. This process ensures that SWD access is not possible between kernel exit and user code SWD disabling.

## KERNEL IMPLEMENTATION

After a reset, the kernel initializes the device and programs calibration values into peripheral registers.

The kernel reads back the register content of the register used during the initialization and calculates a checksum using the read values. The kernel compares the calculated checksum with a checksum stored in the kernel space during production. If the checksum comparison fails, the kernel writes the calculated checksum into the FEEDATH register before resuming.

The kernel then performs a SRAM integrity check. During the SRAM integrity check, single-bit ECC errors are detected and autorecorrected. With detected non-autorecorrected SRAM ECC errors, a bus exception is generated, where the implemented exception handler initializes the SRAM array with zeros and initiates a software reset.

After the SRAM check, the kernel determines which mode of operation it has to branch to. This mode is either debug mode, user mode, bootloader mode, or LIN download mode.

### Debug Mode

After a reset, the kernel enters debug mode when the input level of the GPIO5 pin is low. The kernel branches to user space using Address 0x00000000. This mode of operation is only intended for code development because it bypasses the Page 0 corruption check.

The user ensures the input level of the GPIO5 pin is low prior to a reset being issued to ensure entering debug mode.

### Normal Kernel Operating Mode

In normal kernel operating mode, if after a reset event, the kernel finds the input level of the GPIO5 pin high, the kernel checks for a valid first page of user flash. A valid page is one that has a valid CRC signature at Address 0x7FC. If the kernel determines that the first page of user flash is valid, the kernel branches to the beginning of that page. It is recommended that the first page contains code that validates the rest of the application code before exiting the first page.

## KERNEL

A default key value of 0x16400000 can be used instead of the CRC at Address 0x7FC. If this key is found at Address 0x7FC, the kernel branches to the beginning of Page 0. However, using the default key does not ensure that the first page is not corrupted.

If the 0x7FC location has already been programmed and user code is required to modify it, either Page 0 must be erased or the 0x7FC location must be rewritten with all zeros. Overwriting the 0x7FC location with any other value is not recommended because an invalid ECC can result.

### Bootloader Mode

If, after a reset, the kernel finds the input level of the GPIO5 pin to be high and Page 0 not to have a valid CRC or default key, the kernel checks for a valid user bootloader. The bootloader can be of any size up to 30 kB, but must be located at the top of the user flash and contain the following basic bootloader data:

- ▶ Address (user flash size – 0x4) must contain the CRC of the bootloader.
- ▶ Address (user flash size – 0x1C) must contain the lowest address of the bootloader block.
- ▶ Address (user flash size – 0x20) must contain the entry point of the bootloader code.

All three addresses must contain valid information to enter the bootloader correctly. Due to the ARM Cortex-M3 processor addressing architecture, any address branched to must be a half word boundary + 1.

For example,

- ▶ If the lowest address of the bootloader on a 96 kB device (ADuCM330WFS) is 0x10800, the entry point must be 0x10801.
- ▶ If the lowest address of the bootloader on a 128 kB device (ADuCM331WFS) is 0x18800, the entry point must be 0x18801.

The flash size designates the size of user flash. The user flash size for the ADuCM330WFS (96 kB) is 0x18000 bytes. The user flash size for the ADuCM331WFS (128 kB) is 0x20000 bytes.

The kernel uses the basic bootloader data (CRC, lowest address, and entry point) to determine if the bootloader is valid. If the bootloader is not valid, the kernel enters download mode and waits for data via the LIN interface.

In user application mode, the device can receive commands via the LIN interface to enter the bootloader mode, which is located at the top of the user flash. The bootloader, using the appropriate user protocol, can update the application code. Before entering the bootloader, the user must ensure that the value at Address 0x7FC is not the CRC for Page 0 or the key value (0x16400000). The invalid value at Address 0x7FC ensures that Page 0 appears invalid (see [Figure 3](#)). During the last step of programming the flash, Address 0x7FC must be written with either the CRC of Page 0 or the key value to ensure the kernel can enter user application mode.

If the bootloader locations have already been programmed and user code is required to modify them, the user must either erase that page or overwrite the location with all zeros. Overwriting the bootloader locations with any other value is not recommended because an invalid ECC can result.

If the bootloader feature is not used, the entry point of the bootloader (flash size – 0x20) must be set to a value of 0xFFFFFFFF. This value prevents unwanted attempts to enter the bootloader function.

### Interrupted Bootloading

If the user defined flash programming procedure (bootloading) is interrupted before completion, the bootloading can be restarted after a reset is executed. Following a reset, after a partial programming of the flash, the kernel detects that the application is corrupted (value at Address 0x7FC is incorrect) and, as shown in [Figure 3](#), checks for a valid bootloader. The kernel passes control to the bootloader and the user defined flash programming procedure is repeated.

### Downloader Mode

If the kernel finds that the bootloader is not valid, the kernel enters the basic downloader of the kernel, and it is possible to program the flash with user code as described in the [AN-946 Application Note](#). When in this state, if no valid LIN frames are received within about one hour, the device enters a fail safe mode. This mode can only be exited with a full power cycle.

The download mode supports a fast LIN download option enabling the user to program the device at speeds of up to 100 kbaud.

The download mode cannot be entered from any of the other modes except via a reset.

## KERNEL

After user code has been downloaded via LIN, the user must power cycle the device.

### Interrupted Downloading

If downloading to the user space is interrupted before the download is complete, the download can be restarted as long as Address 0x7FC does not contain the Page 0 CRC or the key (0x16400000) and the bootloader is not valid. The downloader can be restarted at any time by resetting the device. To allow restarting of download, Address 0x7FC of Page 0 must only be written to at the end of the download process. In addition, if the bootloader feature is used, the values at flash size - 0x4 and flash size - 0x1C must be updated only after the entire bootloader has been downloaded and verified.

### Direct LIN Interface (External Transceiver Mode)

When entering the download mode, the kernel drives the GPIO3 pin high, which can be used to enable an external LIN interface. Do not use this mode (an external LIN transceiver to communicate to an external LIN interface) in a functional safety application. The kernel then monitors both the LIN pin and the Rx pin. If a frame start is detected on the LIN pin, the kernel assumes that the application is in single battery monitoring mode. If a frame start is first detected on the LIN\_RX pin (GPIO4), the kernel switches over to use the LIN\_RX/LIN\_TX pins (GPIO4/GPIO1) instead. This allows use of an external LIN transceiver. For the kernel, the only difference between these modes is this switching from the LIN pin to the LIN\_RX/LIN\_TX pins. The kernel only performs this switching when it reaches download mode. If the kernel exits to user or bootloader mode, the user code must switch to the LIN\_RX/LIN\_TX pins and drive the GPIO3 pin to control the transceiver.

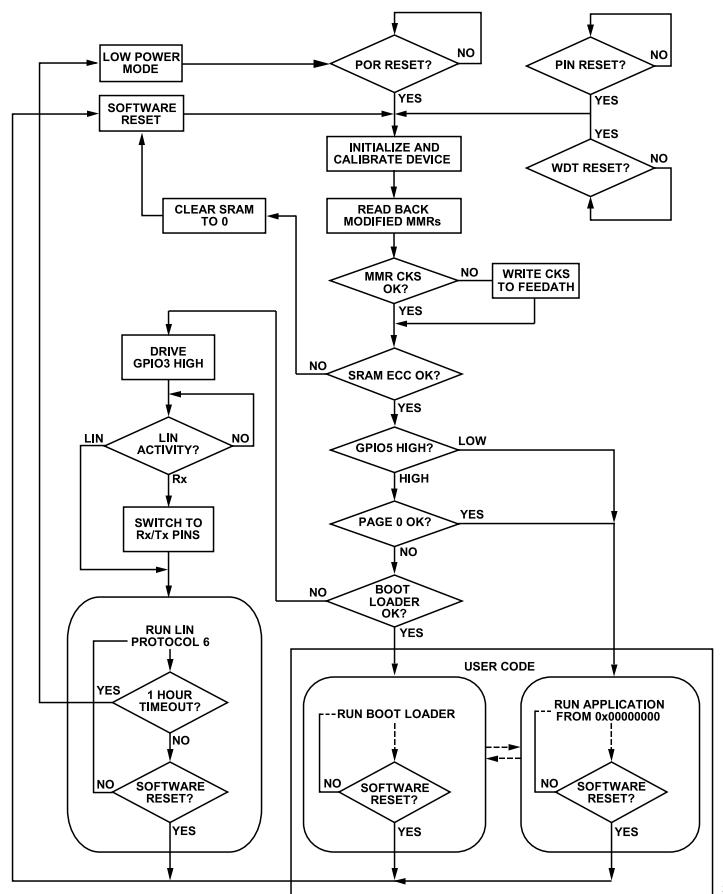


Figure 3. Kernel Flowchart

## RESET

### RESET FEATURES

There are four kinds of resets:

- ▶ Software system reset (SWRST)
- ▶ External reset (EXTRST)
- ▶ Power-on reset (POR)
- ▶ Watchdog timeout reset (WDRST)

### RESET OPERATION

The SWRST is provided as part of the ARM Cortex-M3 processor core and allows the device to be put into a known state. To generate an SWRST, the value of 0x05FA0004 must be written to the application interrupt and reset control register (AIRCR register). This register is part of the NVIC and is located at Address 0xE000ED0C. The RSTSTA register stores the cause for the reset until the RSTSTA register is cleared by writing to the RSTCLR register. RSTSTA and RSTCLR can be used during a reset exception service routine to identify the source of the reset.

The RESET pin does not reset the debug logic.

*Table 39. Device Reset Implications*

Reset	Reset External Pins to Default State	Execute Kernel	Reset All MMRs Except RSTSTA	Reset All Top Die Registers	Reset All Peripherals	Valid SRAM	RSTSTA After Reset Event
SWRST	Yes	Yes	Yes	No	Yes	RAM is not valid when a 2-bit ECC error is detected during kernel initialization (SRAM initialized to zero)	Register RSTSTA, Bit 3 = 1
WDRST	Yes	Yes	Yes	No	Yes	RAM is not valid when a 2-bit ECC error is detected during kernel initialization (SRAM initialized to zero).	Register RSTSTA, Bit 2 = 1
EXTRST	Yes	Yes	Yes	No	Yes	RAM is not valid when a 2-bit ECC error is detected during kernel initialization (SRAM initialized to zero).	Register RSTSTA, Bit 1 = 1
POR	Yes	Yes	Yes	Yes	Yes	RAM is not valid.	Register RSTSTA, Bit 0 = 1

### RESET MEMORY MAPPED REGISTER

*Table 40. Reset Memory Mapped Register (Base Address 0x40002400)*

Offset	Name	Description	Access	Reset
0x0040	RSTSTA	Reset status register	Read	Depends on the type of reset
0x0040	RSTCLR	Reset clear register	Write	Not applicable

### Reset Status and Reset Clear Registers

Address: 0x40002440, Reset: reset dependent, Name: RSTSTA and RSTCLR

*Table 41. RSTSTA and RSTCLR Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:4]	Reserved	Reserved	
3	SWRST	Software reset 0: cleared by setting the corresponding bit in the RSTCLR register 1: set automatically when the ARM Cortex-M3 processor system reset is generated	SM230
2	WDRST	Watchdog timeout 0: cleared by setting the corresponding bit in the RSTCLR register 1: set automatically when a watchdog timeout occurs	SM230

## RESET

**Table 41. RSTSTA and RSTCLR Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
1	EXTRST	External reset 0: cleared by setting the corresponding bit in the RSTCLR register 1: set automatically when an external reset occurs	SM230
0	POR	Power-on reset 0: cleared by setting the corresponding bit in the RSTCLR register 1: set automatically when a power-on reset occurs	SM230

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

The bits in the RSTSTA and RSTCLR registers must be checked as part of the power-up self check. The user must poll these bits after any reset and check for consistency. An unexpected reset event must be treated as a potential fault condition. Take appropriate action to put the device into a safe state.


## MEMORY ORGANIZATION

Three separate blocks of memory are accessible to the user, and they are as follows:

- ▶ 10 kB of SRAM from 0x20000000 to 0x200027FF
- ▶ 4 kB of data flash memory 0x00400000 to 0x00400FFF
- ▶ 96 kB of on-chip Flash/EE memory available to the user from 0x00000000 to 0x00017FFF with the ADuCM330WFS
- ▶ 128 kB of on-chip Flash/EE memory available to the user from 0x00000000 to 0x0001FFFF with the ADuCM331WFS

There is also an additional 2 kB reserved for the kernel space from 0x00020000 to 0x000207FF.

These blocks are mapped according to the ARM Cortex-M3 processor memory map, as shown in [Figure 4](#). All on-chip peripherals are accessed via the MMRs, situated in the bit band region. Any access to MMRs takes three clock cycles of the clock used in the related functional block, unless otherwise noted.

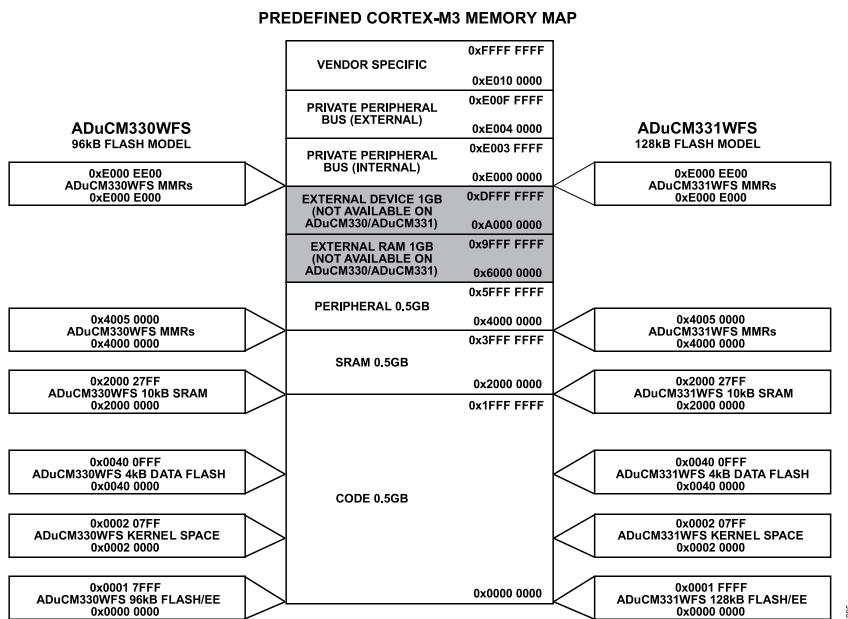

*Figure 4. ADuCM330WFS/ADuCM331WFS Memory Map Diagram*

## FLASH CONTROLLER

### FLASH CONTROLLER FEATURES

The flash memory available to the user are 96 kB (ADuCM330WFS) or 128 kB (ADuCM331WFS) program flash and 4 kB data flash.

#### Commands Supported

The flash memory command options available to the user are write, mass erase, page erase, generation of signatures for single pages or multiple pages, and command abort.

Accesses from the core on program flash are not stalled if the command in progress is in data flash. Accesses in data flash are stalled if the command in progress is in program flash.

#### Flash Protection

The flash memory protection options available to the user are write protection for user space and data flash and the ability to lock serial wire interface.

#### Flash Integrity

The flash memory integrity check options available to the user are

- ▶ Automatic signature check of kernel space on reset
- ▶ User signature for application code
- ▶ 8-bit ECC includes a single-bit error detection and autocorrection, which can generate an interrupt, and non-autocorrected error detection, which generates a bus fault exception

### FLASH CONTROLLER OVERVIEW

The flash controller supports two embedded high data retention (HDR) flash memories: 96 kB (ADuCM330WFS) or 128 kB (ADuCM331WFS) program flash and 4 kB data flash. Program flash memory is for storing user code and has an additional 2 kB of information space to store the kernel. Data flash memory can store additional data by the user. A write to the flash is executed via keyhole access.

### FLASH MEMORY ORGANIZATION

On the ADuCM330WFS, the controller supports 96 kB of program flash ending at Address 0x17FFF with 2 kB of information space containing the kernel, as shown in [Figure 5](#).

On the ADuCM331WFS, the controller supports 128 kB of program flash ending at Address 0x1FFFF with 2 kB of information space containing the kernel, as shown in [Figure 6](#).

The ADuCM330WFS/ADuCM331WFS additionally contain a separate block with 4 kB of data flash memory, as shown in [Figure 7](#). Page sizes are 2 kB for program flash and 512 bytes for data flash.

#### Program Flash Information Space

The program flash information space is mapped above the program flash user space. The information space contains the kernel and default calibration and configuration data.

#### Program Flash User Space

The top 24 bytes of program flash user space are reserved for a signature, the user write protection (program flash write protection), and the user failure analysis key (USERFAKEYx) registers, as shown in [Figure 8](#).

If the user tries to read from or write to a portion of memory that is not available, a bus error is returned. If the user tries to write via the keyhole to a portion of memory that is not available, an error flag is set in Register FEESTA, Bit 4.

## FLASH CONTROLLER

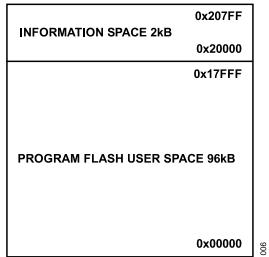


Figure 5. ADuCM330WFS (96 kB) Program Flash Memory Map

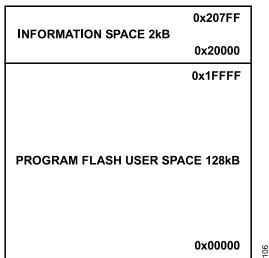


Figure 6. ADuCM331WFS (128 kB) Program Flash Memory Map

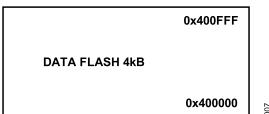


Figure 7. Data Flash Memory Map

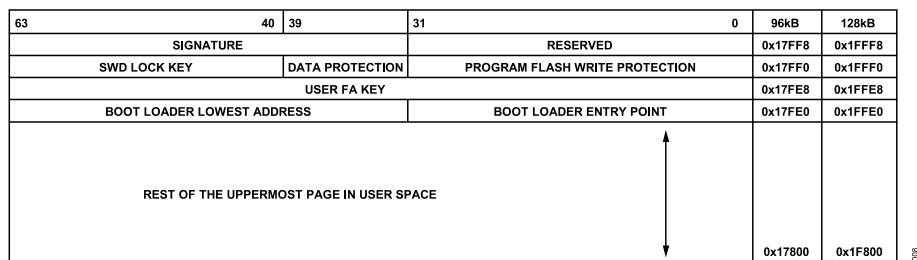


Figure 8. ADuCM330WFS (96 kB) and ADuCM331WFS (128 kB) Uppermost Page of User Memory

## WRITING TO FLASH/EE MEMORY

Writing to program and data flash is achieved through keyhole access. Each write programs 64 bits of data.

Keyhole access consists of flash address, data registers, a key register, and a command register.

To write to a flash location, the following sequence is required:

1. Write to the FEEADDR register with the 23-bit memory mapped address of the flash location.
2. Write to the FEEDATL register and the FEEDATH register with 64 bits of data.
3. Write 0xF456 followed by 0xF123 to the FEEKEY register.
4. Write to the FECMD register with write command.

After the write command is given, the controller writes to the program or the data flash based on the address provided. A single 64-bit location can only be written to once without an erase.

## FLASH CONTROLLER

### Flash Memory Write Code Example

```
unsigned int uiSTA;

FEEADR = 0x00001800;           // A 64-bit flash location
FEEDATL = 0x01234567;         // Data
FEEDATH = 0x89ABCDEF;
FEEKEY = 0xF456;              // Enter Key
FEEKEY = 0xF123;
FEECMD = 0x4;                 // Flash write command

do{
    do{
        uiSTA = FEESTA;
    }while(uiSTA & 0x1);          // Wait until not busy
}while( ! (uiSTA & 0x4));      // Ensure command completed
```

## ERASING FLASH/EE MEMORY

User code can call two flash erase commands.

- ▶ Mass erase: this command erases the entire user flash memory. After entering the user protection key into the FEEKEY register, write the mass erase command to the FEECMD register. Example code is provided in the [Mass Erase of Data Flash Code Example](#) section.
- ▶ Page erase: this command erases 2 kB in user space of program flash or 512 bytes of data flash. The page is selected by the FEEADR1L register. After entering the user protection keys into the FEEKEY register, load the FEEADR1L register with the page address to be erased. Finally, write the page erase command to the FEECMD register. CMDDONE (Register FEESTA, Bit 2) indicates that the page erase command is complete. Example code is provided in the [Page Erase Code Example](#) section.

During a page erase or mass erase sequence, the flash controller and flash block consume extra current for the duration of the flash erase sequence. See the ADuCM330WFS/ADuCM331WFS data sheet for exact specifications.

### Mass Erase of Data Flash Code Example

```
unsigned int uiSTA;

FEEKEY = 0xF456;              // Enter Keys
FEEKEY = 0xF123;
FEECMD = 0x6;                 // Mass Erase Data Flash

do{
    do{
        uiSTA = FEESTA;
    }while(uiSTA & 0x1);          // Wait until not busy
}while( ! (uiSTA & 0x4));      // Ensure command completed
```

### Page Erase Code Example

```
unsigned int uiSTA;

FEEADR1L = 0x00010000;         // A location in the page; example uses Page 32
FEEKEY = 0xF456;               // Enter Keys
FEEKEY = 0xF123;
FEECMD = 0x1;                  // Flash erase page command
```

## FLASH CONTROLLER

```

do{
  do{
    uiSTA = FEESTA;
  }while(uiSTA & 0x1);      // Wait until not busy
}while( ! (uiSTA & 0x4)); // Ensure command completed

```

## FLASH CONTROLLER OPERATION

The ADuCM330WFS/ADuCM331WFS flash controller supports simultaneous access to both data and program flash during certain operations. [Table 42](#) shows these operations.

*Table 42. Flash Controller Access Matrix*

Data Flash	Program Flash	Available
Standby	Standby	Yes
Read	Standby	Yes
Program	Standby	Yes
Erase	Standby	Yes
Standby	Read	Yes
Standby	Program	Yes
Standby	Erase	Yes
Read	Read	Yes
Program	Read	Yes
Erase	Read	Yes
Read	Program	No
Read	Erase	No
Program/Erase	Program	No
Erase/Program	Erase	No

## FLASH PROTECTION

The three types of protection that are implemented include key protection, read protection, and write protection.

### Flash Protection: Key Protection

Some of the flash controller registers are key protected to avoid accidental writes to these registers.

The user key consists of two writes to the FEEKEY register: 0xF456 followed by 0xF123 are written to the register. The key must be entered to run certain user commands, to write to certain locations in flash, or to enable write access to the setup (FEECON1) register. When entered, the key remains asserted unless a command is written to the FEECMD register. When the command starts, the key clears automatically.

If, for example, the key is entered to write to certain locations in flash, and the user write procedure is interrupted before the command is entered, ensure that the key is cleared by writing any value to the key register to prevent an unintended write.

### Flash Protection: User Read Protection

User space read protection is provided by disabling serial wire access. The user can disable serial wire access by writing 0 to the DBG bit in the flash FEECON1 register. Serial wire access is disabled while the kernel is running. Otherwise, serial wire access can prevent the kernel from running to completion. When the kernel has completed, it re-enables serial wire access for the user (unless the SWD restriction key is valid). See the [Kernel](#) section for more information.

### Flash Protection: User Write Protection

User write protection is provided to prevent accidental writes to pages in user space and to protect blocks of user code when downloading extra code to flash. If a write or erase of a protected location is detected, the ADuCM330WFS/ADuCM331WFS flash controller generates an interrupt when the command error or complete interrupt is enabled.

## FLASH CONTROLLER

The user write protection is located in the uppermost page of user memory space. Refer to [Figure 8](#) for details.

**Table 43. 96 kB Program Flash Write Protection, Bits[31:16]**

Bit 31	Bit 30	Bit 29	Bit 28	Bit 27	Bit 26	Bit 25	Bit 24	Bit 23	Bit 22	Bit 21	Bit 20	Bit 19	Bit 18	Bit 17	Bit 16		
									Reserved	Page 46 and Page 47	Page 44 and Page 45	Page 42 and Page 43	Page 40 and Page 41	Page 38 and Page 39	Page 36 and Page 37	Page 34 and Page 35	Page 32 and Page 33

**Table 44. 128 kB Program Flash Write Protection, Bits[31:16]**

Bit 31	Bit 30	Bit 29	Bit 28	Bit 27	Bit 26	Bit 25	Bit 24	Bit 23	Bit 22	Bit 21	Bit 20	Bit 19	Bit 18	Bit 17	Bit 16
Page 62 and Page 63	Page 60 and Page 61	Page 58 and Page 59	Page 56 and Page 57	Page 54 and Page 55	Page 52 and Page 53	Page 50 and Page 51	Page 48 and Page 49	Page 46 and Page 47	Page 44 and Page 45	Page 42 and Page 43	Page 40 and Page 41	Page 38 and Page 39	Page 36 and Page 37	Page 34 and Page 35	Page 32 and Page 33

**Table 45. 128 kB and 96 kB Program Flash Write Protection, Bits[15:0]**

Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Page 30 and Page 31	Page 28 and Page 29	Page 26 and Page 27	Page 24 and Page 25	Page 22 and Page 23	Page 20 and Page 21	Page 18 and Page 19	Page 16 and Page 17	Page 14 and Page 15	Page 12 and Page 13	Page 10 and Page 11	Page 8 and Page 9	Page 6 and Page 7	Page 4 and Page 5	Page 2 and Page 3	Page 0 and Page 1

**Table 46. SWD Lock Key, Bits[63:40], 4 kB Data Flash Write Protection, Bits[39:32]**

Bits[63:40]	Bit 39	Bit 38	Bit 37	Bit 36	Bit 35	Bit 34	Bit 33	Bit 32
SWD Lock Key	Page 7	Page 6	Page 5	Page 4	Page 3	Page 2	Page 1	Page 0

The flash controller uploads the write protection into local registers after a reset. To write to the write protection bits, the user must first write 0xF456 followed by 0xF123 to the key register. After the write protection is written, the write protection cannot be rewritten without a mass erase of user space or a page erase of the last page (if the last page is not protected). After a mass erase, the device must be reset to deassert the uploaded copy of the write protection bits.

The following is the sequence to program the write protection, Bits[31:0]:

1. Ensure that the last page of user space is erased.
2. Write 0xF456 followed by 0xF123 to the key register, FEEKEY.
3. Write the required write protection directly to flash. Write 0 to enable protection. The write protection address is 0x17FF0 for 96 kB of flash (ADuCM330WFS). The write protection address is 0x1FFF0 for 128 kB of flash (ADuCM331WFS).
4. Verify that the write completed by polling the status register, FEESTA, Bit 3, or by enabling a write complete interrupt.
5. Reset the device, and the write protection is uploaded from the user space and activated by the flash controller.

If the write protection in flash has not been programmed (that is, 0xFFFFFFFF is uploaded from flash on power-up), the FEEPROM register and the FEEPROD register can be written to directly from user code. Writing to the registers directly from user code allows the user to verify the write protection before committing it to flash. If the write protection in flash has been programmed, the MSB of the write protection must be programmed to 0 to prevent erasing of the write protection block. For the ADuCM330WFS write protection, the memory is split into 24 blocks. For 96 kB of flash, memory is split into  $24 \times 4$  kB blocks. For the ADuCM331WFS write protection, the memory is split into 32 blocks. For 128 kB of flash, memory is split into  $32 \times 4$  kB blocks.

If an attempt is made to write to the write protection word in flash without setting the FEEKEY register first, Bit 4 of the flash status register is set.

## FLASH CONTROLLER FAILURE ANALYSIS KEY

It may be necessary to perform failure analysis on devices that are returned by the user even though read protection is enabled. A method is provided to allow failure analysis of protected memory by a user failure analysis (FA) key.

The user FA key is a 64-bit key that is stored at the top of the user space in flash, as shown in [Figure 8](#). This key is used to gain access to user code if the serial wire interface is locked. It is the responsibility of the user to program this key to a value. A value of 0xFFFFFFFF is the default, and any other value programmed in this location is treated as the user FA key. This same key must be programmed into the USERFAKEYx register to unlock read protection via SWD. The key must be given to Analog Devices to enable access to user code.

## FLASH CONTROLLER

### FLASH INTEGRITY SIGNATURE FEATURE

The signature is used to check the integrity of the flash device. The signature is calculated on 64-bit data by splitting it into two 32-bit data-words. The CRC calculation sequence is first the lower 32 bits, then the higher 32 bits of the 64-bit flash data.

The ECC is checked on each flash read. If errors are corrected by the ECC, the ERRCORRECTED flag in the status register is set after the signature check is completed and an interrupt is raised. If errors are detected and cannot be corrected by ECC, the ERREDETECTED flag in the status register is set and an interrupt is raised. A signature check is treated as a failure when the computed signature is not equal to the stored signature. The software can call a signature check command occasionally or whenever a new block of code is about to be executed. The signature is a 24-bit CRC with the polynomial  $x^{24} + x^{23} + x^6 + x^5 + x + 1$ . Contact Analog Devices for more information, if required.

The sign command can be used to generate or check the signature of a block of code, where a block can be a single page or multiple pages. A 24-bit linear feedback shift register is used to generate the signature. The hardware assumes that the signature for a block is stored in the upper four bytes of the most significant page of a block. Therefore, these four bytes cannot be included when generating the signature.

The following procedure must be followed to generate a signature.

1. Write the start address of the block to the FEEADR1L register.
2. Write the end address of the block to the FEEADR1H register.
3. Write the sign command to the command register.
4. When the command is complete, the signature is available in the flash signature register (FEESIGN). The signature is compared with the data stored in the upper four bytes of the uppermost page of the block. If the data does not match the signature, a fail status of VERIFYERR is returned in the status register (Register FEESTA, Bits[5:4] = 10).

While the signature is being computed, all other accesses to flash are stalled.

The user must run the CRC polynomial in user code first to generate the CRC value and then must write the generated CRC value to the upper four bytes of the uppermost page of a block. When this operation is complete, any call of the signature feature compares this 4-byte value to the result of the signature check function.

### ECC Error Handling

During a read of the flash, detected single-bit errors are autocorrected and the appropriate flags are set in the flash status register.

Detected single-bit errors generate a flash interrupt if the user has not disabled the ECCCMDINTEN bit in the command control register (FEECON0, Bit 4).

If there is a non-autocorrected ECC error detected, an error is issued by the controller. Such ECC errors generate a bus fault exception, unless they are encountered by the sign command. In case of a detected non-autocorrected ECC error, the user code must not return from the bus fault exception handler to normal application code.

An ECC error is signaled by the ECC error detection/correction module when a flash location is read. Depending on when the read occurs (for example, during command execution or during a read) and from which flash (program or data) the read occurs, the appropriate flags are set in the status register (for example, ECCERRCMD or ECCERRREADxx).

### ECC Error During Read

Because a program and data flash read can happen simultaneously, two separate ECCERRREADxx flags are present in the status register. The flags are Register FEESTA, Bits[10:9] and Register FEESTA, Bits[12:11]. If the interrupt is configured to be generated when an ECC error occurs, the address at which the error is detected is available for readback to the user.

### ECC Error During Execution of Sign Command

If there is an ECC error during signature check, ECC error data and address registers are not updated. After the command is complete, the ECCERRCMD flags in Register FEESTA, Bits[8:7] are updated. If ECCCMDINTEN in the FEECON0 register is set and any of the ECCERRCMD bits are set, an interrupt is generated.

## FLASH CONTROLLER PERFORMANCE AND COMMAND DURATION

Typical command duration times are as follows:

## FLASH CONTROLLER

- ▶ Direct single write access (72-bit location): 72.187 µs
- ▶ Mass erase: 17.126 ms
- ▶ Page erase: 17.012 ms
- ▶ Page write: program flash user space (256, 72-bit locations) =  $8 \times 72.187 \mu s + 248 \times 49.74 \mu s = 12.913$  ms

For a 4 kB data flash, each row has  $32 \times 72$ -bit locations. However, there are only two rows per page. Assuming that the page is written in sequence, and that the writes are done back to back, the following is true for a page write:

$$4 \text{ kB data flash} = 2 \times ((1 \times 72.187 \mu s) + (31 \times 49.74 \mu s)) = 3.228 \text{ ms}$$

## FLASH CONTROLLER MEMORY MAPPED REGISTERS

*Table 47. Flash Controller Memory Mapped Registers (Base Address 0x40018000)*

Offset	Name	Description	Access	Reset
0x0000	FEESTA	Flash memory status register	Read	0x00000000
0x0004	FEECON0	Flash memory command control register	Read/write	0x0010
0x0008	FEECMD	Flash memory command register	Read/write	0x0000
0x000C	FEEADR	Flash address keyhole register	Read/write	0x00000000
0x0010	FEEDATL	Flash data register (lower)	Read/write	0x00000000
0x0014	FEEDATH	Flash data register (upper)	Read/write	0x00000000
0x0018	FEEADR1L	Flash controller lower page address register	Read/write	0x00000000
0x001C	FEEADR1H	Flash controller upper page address register	Read/write	0x00000000
0x0020	FEEKEY	Flash controller key register	Write	0x0000
0x0028	FEEPROP	Program flash write protection register	Read/write	0xFFFFFFFF
0x002C	FEEPROD	Data flash write protection register	Read/write	0xFF
0x0030	FEEECC	Data flash ECC disable register	Read/write	0x00000000
0x0034	FEESIGN	Flash controller signature register	Read	0x00000000
0x0038	FEECON1	Serial wire control register	Read/write	0x0001
0x0040	FEEABORT	Flash controller write abort address register	Read	0x00000000
0x0048	FEEAENO	Flash controller abort enable register	Read/write	0x0000
0x0068	USERFAKEY0	USERFAKEY low register, Bits[31:0]	Read/write	0x00000000
0x006C	USERFAKEY1	USERFAKEY high register, Bits[63:32]	Read/write	0x00000000
0x0074	FEEPECC	Program flash address register for ECC error	Read	0x00000000
0x0078	FEDECC	Data flash address register for ECC error	Read	0x00000000

### Flash Memory Status Register

Address: 0x40018000, Reset: 0x00000000, Name: FEESTA

*Table 48. FEESTA Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[31:25]	Reserved	Reserved. These bits return 0 when read.	
[24:22]	ECCCOUNTDATA	This is a 3-bit counter that reflects the number of 1-bit ECC read errors in data flash after Register FEESTA, Bits[12:11] = 0x2 and before FEESTA is read. This counter does not count ECC 2-bit errors. The counter is cleared when FEESTA is read by the user.	SM162
[21:20]	Reserved	Reserved.	
[19:17]	ECCCOUNTPROG	This is a 3-bit counter that reflects the number of 1-bit ECC read errors in program flash after Register FEESTA, Bits[10:9] = 0x2 and before FEESTA is read. This counter does not count ECC 2-bit errors. The counter is cleared when FEESTA is read by the user.	SM152
[16:15]	ECCRERRSIGN	ECC error during initial signature check. 00: NOERR. No error. Successful completion of a flash read operation during initial signature check or page signature check. 01: ERREDETECTED. During initial signature check, 2-bit errors are detected, and not corrected for at least one flash location.	SM140

**FLASH CONTROLLER****Table 48. FEESTA Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		10: ERRCORRECTED. 1-bit error is corrected for one flash location during a signature command. 11: ERR1BIT_2BIT. During the initial signature command, 1-bit errors and 2-bit errors are detected on one or more flash locations.	
14	INIT	Initialization upload in progress. After a reset, the flash controller uploads the flash configuration from the information space, checks the information space signature, and uploads the user write protection. 0: cleared to 0 when the upload completes. User code cannot run until this bit deasserts. 1: set to 1 while the upload is in progress.	
13	SIGNERR	Information space signature check on reset error. After a reset, the flash controller automatically checks the information space signature. User code does not execute if this bit is set. 0: cleared to 0 if the signature check returns no errors. 1: set to 1 if the signature check fails.	SM140
[12:11]	ECCERRREADDT	ECC errors during a read of data flash. 00: NOERR. No error. Successful completion of a read from data flash. 01: ERDDETECTED. 2-bit error detected in one or more flash locations during a read from data flash. The errors are not corrected. 10: ERRCORRECTED. 1-bit error detected for one flash location during a read from data flash. The error is corrected. 11: ERR1BIT_2Bit. 1-bit errors and 2-bit errors are detected in data flash.	SM162
[10:9]	ECCERRREADPG	ECC errors during read of program flash. 00: NOERR. No error. Successful completion of a read from program flash. 01: ERDDETECTED. 2-bit error detected in one or more flash locations during a read from program flash. The errors are not corrected. 10: ERRCORRECTED. 1-bit error detected for one flash location during read from program flash. The error is corrected. 11: ERR1BIT_2Bit. 1-bit errors and 2-bit errors are detected in program flash.	SM152, SM143
[8:7]	ECCERRCMD	ECC errors. During the signature command 00: NOERR. No error. Successful completion of a flash read operation during the signature check. 01: ERDDETECTED. 2-bit error detected in one or more flash locations during the signature command. The errors are not corrected. 10: ERRCORRECTED. 1-bit error detected for one flash location while performing a signature check. The error is corrected. 11: ERR1BIT_2Bit. 1-bit errors and 2-bit errors are detected on one or more flash locations.	SM151, SM161
6	Reserved	Reserved.	
[5:4]	CMDFAIL	Status of a command on completion. 00: SUCCESSCOMP. Successful completion of a command or a write. 01: LOCATIONPROT. Attempted write or erase of a protected location. The command is ignored. 10: VERIFYERR. Read verify error. After an erase, the controller reads the corresponding word(s) to verify that the transaction completed. If the data read is not all Fs (0xFFFFFFFF), this is the resulting status. If the sign command is executed, and the resulting signature does not match the data in the upper four bytes of the upper page in a block, this is the resulting status. 11: aborted. Indicates that a command or a write was aborted by an abort command, or that a system interrupt caused an abort.	SM150, SM160, SM151, SM161
3	WRALCOMP	Write almost complete. 0: cleared when read. 1: set to 1 after the second 24-bit write of the three 24-bit writes is complete.	
2	CMDDONE	Command complete. 0: cleared when read.	

## FLASH CONTROLLER

**Table 48. FEESTA Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		1: set to 1 when a command completes. If there are multiple commands, this status bit asserts after the first command completes and stays asserted until read. It is recommended to wait until this bit is set before continuing.	
1	WRCLOSE	Write close. 0: cleared after the WRALCOMP bit is set to 1. 1: set to 1 when the user writes all keyhole registers for a flash write, and the controller starts writing. If this bit is set to 1, all keyhole registers except the command register are closed for writing.	
0	CMDBUSY	Command busy. 0: cleared to 0 when the flash block is not executing any commands entered via the command register. 1: set to 1 when the flash block is executing a command entered via the flash memory command register (FEECMD).	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## Flash Memory Command Control Register

Address: 0x40018004, Reset: 0x0010, Name: FEECON0

**Table 49. FEECON0 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:5]	Reserved	Reserved. These bits must be set to 0.	
4	ECCCMDINTEN	Flash 1-bit ECC error interrupt enable. This bit must be set to 1 for functional safety relevant applications.  0: no interrupt is generated when 1-bit ECC error interrupt occurs during a read from program or data flash. 1: an interrupt is generated when 1-bit ECC error interrupt occurs during a read from program or data flash.	SM151, SM152, SM161, SM162
3	Reserved	Reserved. This bit must be set to 0.	
2	CMDERRINTEN	Command fail interrupt enable.	SM150, SM160, SM151, SM161
1	WRALCOMP	Write almost complete interrupt enable.	
0	CMDCOMPINTEN	Command complete interrupt enable.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## Flash Memory Command Register

Address: 0x40018008, Reset: 0x0000, Name: FEECMD

**Table 50. FEECMD Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:4]	Reserved	Reserved. These bits must be set to 0.	
[3:0]	CMD	Flash controller commands (see Table 51).	SM151, SM161

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

The commands shown in Table 51 are supported by the flash block. For repeated page erase commands, the key must be entered before each command. If a command is entered without entering the key first, no action is taken, and CMDDONE does not assert. Accesses from the core on program flash are not stalled if the command in progress is in data flash. Accesses in data flash are stalled if the command in progress is in program flash. CMDDONE is asserted if the key is not entered or if an incorrect key is entered.

## FLASH CONTROLLER

**Table 51. Flash Controller Commands (Register FEECMD, Bits[3:0])**

CMD	Name	Description	Functional Safety Requirement <sup>1</sup>
0000	Idle	No command executed.	
0001	ERASEPAGE	Write the address of the page to be erased to the FEEADR1L register, then write this code to the FEECMD register, and the flash erases the page. When the erase is complete, the flash reads every location in the page to verify that all the words in the page are erased. If there is a read verify error, the read verify error is indicated in the FEESTA register. ECC is disabled for this command. To erase multiple pages, wait until a previous page erase has completed, check the status, and then issue a command to start the next page erase. Before entering this command, 0xF456 followed by 0xF123 must be written to the key register.	
0010	Sign	Use this command to generate a signature for a block of data. The signature is generated on a page by page basis. To generate a signature, enter the address of the first page of the block in FEEADR1L, write the address of the last page to FEEADR1H, then write this code to the FEECMD register. When the command is complete, the signature is available for reading in the FEESIGN register. The last four bytes of the last page in a block is reserved for storing the signature. Before entering this command, 0xF456 followed by 0xF123 must be written to the key register. ECC is checked with this command (even if it is specifically disabled for a page). When ECC errors are detected during the sign command, Bits[8:7] in the FEESTA register are updated. When ECC error detections occur as the sign command is being executed, the user must not update the FEEPECC or FEEDECC registers. ECC errors during the sign command only generate an interrupt if Register FEECON0, Bit 2 is set to 1.	SM151, SM161
0100	Write	Write to flash locations. This command takes the address from the FEEADR register and data from the FEEDATx keyhole registers. Before entering this command, 0xF456 followed by 0xF123 must be written to the key register before writing into the write protection location and the user FA key location. No key is required for other flash locations.	SM150, SM160
0101	MASSERASEPROG	Erase all of user space in program flash. When the mass erase is complete, the controller reads every location to verify that all locations are 0xFFFFFFFF. If there is a read verify error, it is indicated in the FEESTA register. ECC is disabled for this command. To enable this operation, 0xF456 followed by 0xF123 must be written to the FEEKEY register. This write is to prevent accidental erases.	
0110	MASSERASEDATA	Erase the data flash (only the first 2048 bytes). When the mass erase is complete, the controller reads every location of data flash to verify that all locations are 0xFFFFFFFFFFFFFF. If there is a read verify error, it is indicated in the status register. ECC is disabled for this command. Before entering this command, 0xF456 followed by 0xF123 must be written to the key register.	
0111	MASSEraseAllData	Erase all user space and all information space in data flash (4096 bytes). When the mass erase is complete, the controller reads every location of data flash to verify that all locations are 0xFFFFFFFFFFFFFF. If there is a read verify error, it is indicated in the status register. ECC is disabled for this command. Before entering this command, 0xF456 followed by 0xF123 must be written to the key register.	
1000	Abort	If this command is issued, any command currently in progress is stopped. The status indicates the command is completed with an error status in Register FEESTA, Bits[6:4]. This is the only command that can be issued while another command is already in progress. This command can also be used to stop a write that is in progress. If a write or erase is aborted, the flash timing is violated, and it is not possible to determine if the write or erase completed. To enable this operation, 0xF456 followed by 0xF123 must first be written to the FEEKEY register to prevent accidental aborts.	

<sup>1</sup> The blank rows in this column mean that the configuration of the command(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the command(s) and develop additional fault detection and control mechanisms as necessary.

### Flash Address Keyhole Register

Address: 0x4001800C, Reset: 0x00000000, Name: FEEADR

**Table 52. FEEADR Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[31:23]	Reserved	Reserved	
[22:3]	Value	Memory mapped address for the flash location	

## FLASH CONTROLLER

**Table 52. FEEADR Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[2:0]	Reserved	Reserved	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### Flash Data Register (Lower)

Address: 0x40018010, Reset: 0xF331030E, Name: FEEDATL

**Table 53. FEEDATL Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[31:0]	Value	Bits[31:0] of the data to be written to flash. After a reset, this register is modified by the kernel and holds device traceability information.	SM300

### Flash Data Register (Upper)

Address: 0x40018014, Reset: 0xFFFFFFFF, Name: FEEDATH

**Table 54. FEEDATH Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[31:0]	Value	Bits[63:32] of the data to be written to flash. After a reset, this register may hold a calculated checksum of MMRs modified by the kernel (see the <a href="#">Kernel</a> section for details).	SM142

### Flash Controller Lower Page Address Register

Address: 0x40018018, Reset: 0x00000000, Name: FEEADR1L

**Table 55. FEEADR1L Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[31:23]	Reserved	Reserved. These bits must be set to 0.	
[22:6]	Value	Used for locating the start address of a page in flash. Used by the erase and sign commands for specific page addresses.	SM151, SM161
[5:0]	Reserved	The six reserved bits for byte addresses. The lower six bits of a byte address are ignored because the sign command uses the page address. Returns 0x0 if read.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### Flash Controller Upper Page Address Register

Address: 0x4001801C, Reset: 0x00000000, Name: FEEADR1H

**Table 56. FEEADR1H Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[31:23]	Reserved	Reserved. These bits must be set to 0.	
[22:6]	Value	Used for locating the end address of a page in flash. Used only by the sign command.	SM151, SM161

## FLASH CONTROLLER

**Table 56. FEEADDR1H Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[5:0]	Reserved	The six reserved bits for byte addresses. The lower six bits of a byte address are ignored because the sign command uses the page address. Returns 0x0 if read.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## Flash Controller Key Register

Address: 0x40018020, Reset: 0x0000, Name: FEEKEY

**Table 57. FEEKEY Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	Value	Enter 0xF456 followed by 0xF123. Returns 0x0 if read.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## Program Flash Write Protection Register

Address: 0x40018028, Reset: 0xFFFFFFFF, Name: FEEPROP

**Table 58. FEEPROP Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[31:0]	Value	Write protection for program flash. This register is read only if the write protection in flash has been programmed. 0: protect a section of flash. 1: leave a flash block unprotected.	SM150

## Data Flash Write Protection Register

Address: 0x4001802C, Reset: 0xFF, Name: FEEPROD

**Table 59. FEEPROD Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[7:0]	Value	Write protection for data flash. This register is read only if the write protection in flash has been programmed. 0: protect a section of flash. 1: leave a flash block unprotected.	SM160

## Data Flash ECC Disable Register

Address: 0x40018030, Reset: 0x00000000, Name: FEEECC

This register is key protected. To write to the register, the user must first write 0xF456 followed by 0xF123 to the key register.

**Table 60. FEEECC Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[31]	ECCDISDT_EN	Data flash page ECC disable. This bit must be set to 0 in functional safety relevant applications. 0: ECC enabled for all data flash pages. 1: ECC disabled for data flash pages set in Bits[2:0].	SM162
[30:3]	Reserved	Reserved. These bits must be set to 0.	

## FLASH CONTROLLER

**Table 60. FEEECC Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[2:0]	ECCDISDT	Page number for which ECC is to be disabled in data flash. Only one page can be disabled at a time.	SM162

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**Table 61. FEEECC Register Write Examples**

Register FEEECC, Bits[31:0]	Result on Data Flash Page
0x80000000	Page 0 ECC disabled
0x80000001	Page 1 ECC disabled
0x80000002	Page 2 ECC disabled
0x80000003	Page 3 ECC disabled
0x80000004	Page 4 ECC disabled
0x80000005	Page 5 ECC disabled
0x80000006	Page 6 ECC disabled
0x80000007	Page 7 ECC disabled
0x0000000X	ECC enabled on all pages

## Flash Controller Signature Register

Address: 0x40018034, Reset: 0x00000000, Name: FEESIGN

**Table 62. FEESIGN Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[31:24]	Reserved	Reserved	
[23:0]	Value	Signature, Bits[23:0]	SM151, SM161

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## Serial Wire Control Register

Address: 0x40018038, Reset: 0x0001, Name: FEECON1

The FEECON1 register is key protected. To write to the FEECON1 register, the user keys must be entered in the FEEKEY register. After writing to FEECON1, a 16-bit value must be written again to the FEEKEY register to lock in the key protection. When serial wire debug mode is disabled, the only way to access the device is via the USERFAKEY registers. Contact Analog Devices to access these registers.

**Table 63. FEECON1 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:1] 0	Reserved DBG	Reserved. These bits must be set to 0.  Serial wire debug enable. The kernel sets this bit to 1 when the kernel has finished executing, enabling debug access for the user.  0: disable access via the serial wire debug interface. 1: enable access via the serial wire debug interface.	See assumptions of use in the ADuCM330WFS/ADuCM331WFS safety manual

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## Flash Controller Write Abort Address Register

Address: 0x40018040, Reset: 0x00000000, Name: FEEABORT

## FLASH CONTROLLER

**Table 64. FEEABORT Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[31:0]	Value	If a write is aborted, these bits contain the address of the location being written when the write was aborted. This register has an appropriate value if a command abort occurred. This register is read after the command is aborted and must be read before any other command is given. After a reset, the value is 0x0. However, after the initial signature check is completed, the value can be random.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### Flash Controller Abort Enable Register

Address: 0x40018048, Reset: 0x0000, Name: FEEAEN0

**Table 65. FEEAEN0 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	Value	To allow a system interrupt to abort a write or a command (erase, sign, or mass verify), write a 1 to the appropriate bit in this register. The appropriate bit is determined by the interrupt required to abort the flash command. For example, if the external IRQ1 is required to abort a flash command, set FEEAEN0 = 0x4. Register FEEAEN0, Bits[13:0] enable Interrupt 0 to Interrupt 13 to abort the flash operation. See <a href="#">Table 4</a> for more information.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### Flash Controller User Failure Analysis Key Registers

#### USERFAKEY Low Register, Bits[31:0]

Address: 0x40018068, Reset: 0x00000000, Name: USERFAKEY0

**Table 66. USERFAKEY0 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[31:0]	Value	User failure analysis key, Register USERFAKEY, Bits[31:0]. The user FA key is a 64-bit key that is used to disable user read protection. It is the responsibility of the user to program this key to a value. To enable this operation, 0xF456 followed by 0xF123 must first be written to the FEEKEY register to prevent accidental setting before the user FA key can be written. This key must be shared with Analog Devices in case failure analysis is required to enable access to user code.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

#### USERFAKEY High Register, Bits[63:32]

Address: 0x4001806C, Reset: 0x00000000, Name: USERFAKEY1

**Table 67. USERFAKEY1 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[31:0]	Value	Register USERFAKEY, Bits[63:32]	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## FLASH CONTROLLER

### Flash Controller ECC Registers

#### Program Flash Address for ECC Error Register

Address: 0x40018074, Reset: 0x00000000, Name: FEEPECC

*Table 68. FEEPECC Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[31:23]	Reserved	Reserved.	
[22:3]	Value	Address in program flash where the ECC error is detected. The contents are not cleared on a read.	SM152
[2:0]	Reserved	Reserved.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

#### Data Flash Address for ECC Error Register

Address: 0x40018078, Reset: 0x00000000, Name: FEEDECC

*Table 69. FEEDECC Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[31:23]	Reserved	Reserved.	
[22:3]	Value	Address in data flash where the ECC error is detected. The contents are not cleared on a read.	SM162
[2:0]	Reserved	Reserved.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## SRAM

### SRAM INTERFACE FEATURES

The ADuCM330WFS/ADuCM331WFS feature 10 kB of SRAM organized as 10240 data bytes, or 2560 words, which are located at 0x20000000. The SRAM space can be used as data memory and as a volatile program space.

### SRAM Integrity

The ADuCM330WFS/ADuCM331WFS implement ECC on the SRAM by adding seven bits to 32-bit words. The implemented ECC allows single-bit detection and autocorrection. Single-bit ECC errors can generate an SRAM ECC interrupt by enabling Bit 1 in the SRAMCTRL register. Detected non-autocorrected ECC errors result in a bus fault exception.

### SRAM INITIALIZATION

After a power-on reset or any reset event, the kernel checks the integrity of the SRAM for ECC errors. If a bus fault exception is triggered during the SRAM integrity check in the kernel, the entire SRAM is reinitialized with valid data (0) and a software reset is generated.

### SRAM MEMORY MAPPED REGISTERS

**Table 70. SRAM Memory Mapped Registers (Base Address 0x40002000)**

Offset	Name	Description	Access	Reset
0x002C	SRAMCTRL	SRAM control register	Read/write	0x0001
0X0030	SRAMERR	SRAM error location register	Read	0x0000

### SRAM Control Register

Address: 0x4000202C, Reset: 0x0001, Name: SRAMCTRL

**Table 71. SRAMCTRL Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
15	SRAM initialization complete	This is a read only bit. This bit is valid only if Bit 2 is set. 0: cleared to 0 on power up. 1: set to 1 after SRAM initialization is complete to indicate that all SRAM locations are written to 0 with valid ECC codes.	
[14:3]	Reserved	Reserved. These bits must be set to 0.	
2	SRAM initialization enable	0: cleared to 0 on power-up. This bit is self cleared and returns to 0 by itself. The user does not need to clear the bit after setting it. 1: set by the user to enable SRAM initialization.	SM171
1	Single bit error interrupt enable	0: cleared by the user to disable interrupt. This bit is cleared by the kernel after power-up. 1: set by the user to enable the interrupt in the event that a single-bit SRAM error is detected and corrected by ECC.	SM172
0	ECC enable	The user must write 1 to this bit.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### SRAM Error Location Register

Address: 0x40002030, Reset: 0x0000, Name: SRAMERR

## SRAM

Table 72. SRAMERR Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	SRAM error location	This is a read only register. The read only register contains the address of the last SRAM access that caused a detected ECC error. The address is an offset to the start address of 0x20000000.	SM172

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## ADC

### ADC FEATURES AND OVERVIEW

The ADuCM330WFS/ADuCM331WFS incorporate two Σ-Δ, analog-to-digital converters (ADCs): ADC0, a 20-bit (19 data bits, 1 sign bit) current measurement channel, and ADC1, primarily a 20-bit voltage, internal and external temperature measurement channel with additional capabilities that are described in this section.

The precision measurement channels combine an attenuator, on-chip buffer, programmable gain amplifier, Σ-Δ modulator, and a digital filter for precise measurement of current, voltage, and temperature in 12 V automotive battery systems.

The simplified ADC transfer function is described as follows:

- ▶ ADC0 current transfer function, where ADC0DAT is the ADC0 conversion result.

$$V_{IN} = \frac{ADC0DAT \times V_{REF}}{2^{28} - 1} \quad (2)$$

- ▶ ADC1 battery voltage transfer function, where ADC1DAT is the ADC1 conversion result.

$$V_{IN} = \frac{24 \times (ADC1DAT \times V_{REF})}{2^{28} - 1} \quad (3)$$

The auxiliary channels (VINx\_AUX) are not routed via the external battery voltage (VBAT) input attenuator, shown in [Figure 10](#). Therefore, the VINx\_AUX measurement derived from [Equation 3](#) does not require the factor of 24.

ADC1 internal temperature transfer function, where ADC1DAT is the ADC1 conversion result, is shown in [Equation 4](#) to [Equation 6](#).

$$V_{IN} = \frac{ADC1DAT \times V_{REF}}{2^{28} - 1} \quad (4)$$

$$Temp_{KELVIN} = \frac{V_{IN}}{274\mu V} \quad (5)$$

$$Temp_{CELSIUS} = Temp_{KELVIN} - 273.15 \quad (6)$$

The following four options are available for the ADC reference voltage:

- ▶ External reference from the VREF pin (default configuration after reset).
- ▶ Internal reference (1.2 V) to AGND.
- ▶ AVDD18 to AGND for ADC0.
- ▶ AVDD18 to the GND\_SW pin for ADC1. The GND\_SW pin needs to be connected to ground via an internal grounding resistor or external resistive circuitry. See the [ADC Ground Switch](#) section for details.

The supply voltage is 1.8 V from the LDO regulator. The two ADCs can independently select a different reference or use the same reference.

Note that for functional safety relevant applications, use the internal 1.2 V reference and ensure that the ADC reference and reference buffer are enabled via the HRFCTRL register and the IRFPD register.

### Current ADC (ADC0)

ADC0 allows measurement of a battery current, sensed through an external shunt resistor with a resistance of 100 μΩ, typically. An on-chip programmable gain amplifier allows ADC0 to be configured to accommodate battery current levels up to ±1500 A.

As shown in [Figure 9](#), the ADC0 employs a Σ-Δ conversion technique to achieve 19 bits plus a sign bit.

Five pairs of differential input signals can be selected inside the input multiplexer as follows:

- ▶ IIN+ and IIN- (current measurement)
- ▶ IIN- and IIN- (internal short configuration)
- ▶ (AVDD18 ÷ 136) and GND (test voltage for ADC0 diagnostic)
- ▶ IIN+\_AUX and IIN-\_AUX (auxiliary channel)
- ▶ Base/emitter ( $V_{BE}$ ) and  $V_{BE}$  (internal short configuration)


## ADC

The  $\Sigma\Delta$  modulator converts the sampled input signal into a digital pulse train. The duty cycle of the pulse train contains the digital information relating to the output voltage level. A sinc3 or sinc4 low-pass filter with programmable decimation is applied to the modulator output data stream to produce a valid 20-bit data conversion result at programmable conversion rates ranging from 4 Hz to 8 kHz in normal power mode and 1 Hz to 656 Hz in low power mode.

ADC0 contains logic that allows an interrupt to be generated after a predefined number of conversions or after the resultant conversion has exceeded a programmable threshold value. Additional logic enables a 32-bit accumulator to sum automatically the 20-bit ADC0 result.

The time to a first valid (fully settled) result on the current channel is dependent on digital filter settings. See [Table 74](#) for details.

An interrupt can be generated even on unsettled ADC samples by enabling the ADC continuous interrupt option. However, for functional safety relevant applications, use interrupts only on fully settled results.

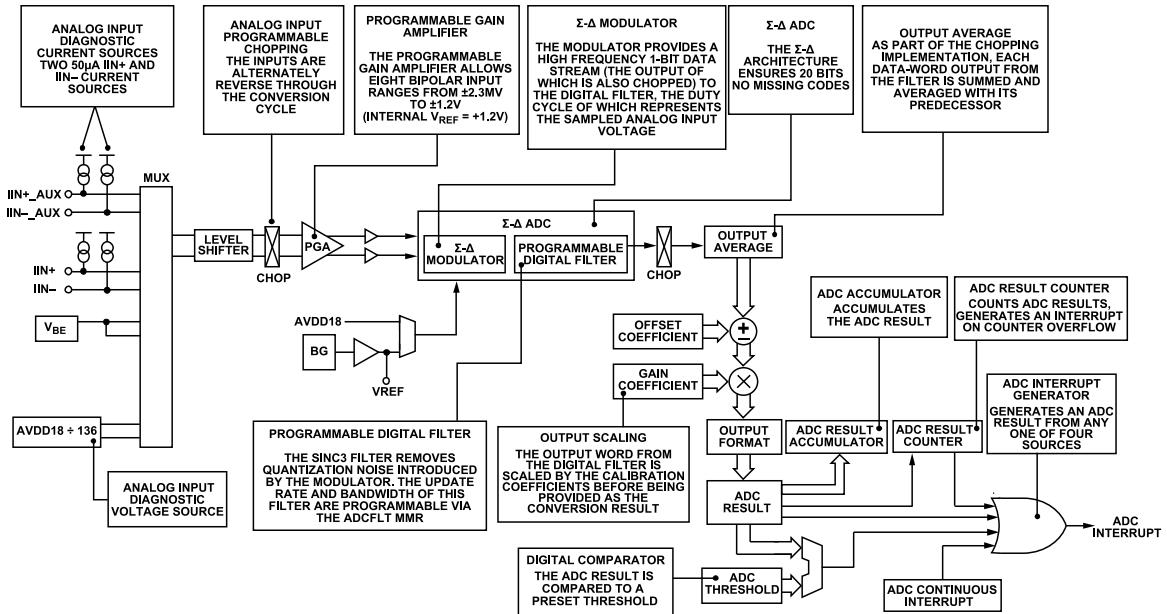

*Figure 9. Current ADC (ADC0) Functional Overview*

## Voltage and Temperature (ADC1)

The ADC1 converts additional battery parameters, such as voltage and temperature. The input to this channel can be multiplexed from an external voltage and an on-chip temperature sensor.

Seven different input signal pairs are selected inside the input mux, as follows:

- ▶ VBAT and AGND (VBAT divided by 24 attenuator)
- ▶ VBAT divided by 48, attenuator for ADC1 diagnostic
- ▶ VTEMP and GND\_SW pin (external temperature sensor)
- ▶ V<sub>BE</sub>1 and V<sub>BE</sub>2 (internal temperature sensor)
- ▶ V<sub>BE</sub> and V<sub>BE</sub> (internal short configuration)
- ▶ VINP\_AUX and VINM\_AUX (auxiliary voltage input)
- ▶ V<sub>BE</sub> and GND (test voltage for ADC1 diagnostic)
- ▶ V<sub>REF+</sub> and V<sub>REF-</sub> positive full scale (test voltage for ADC1 diagnostic)

## ADC

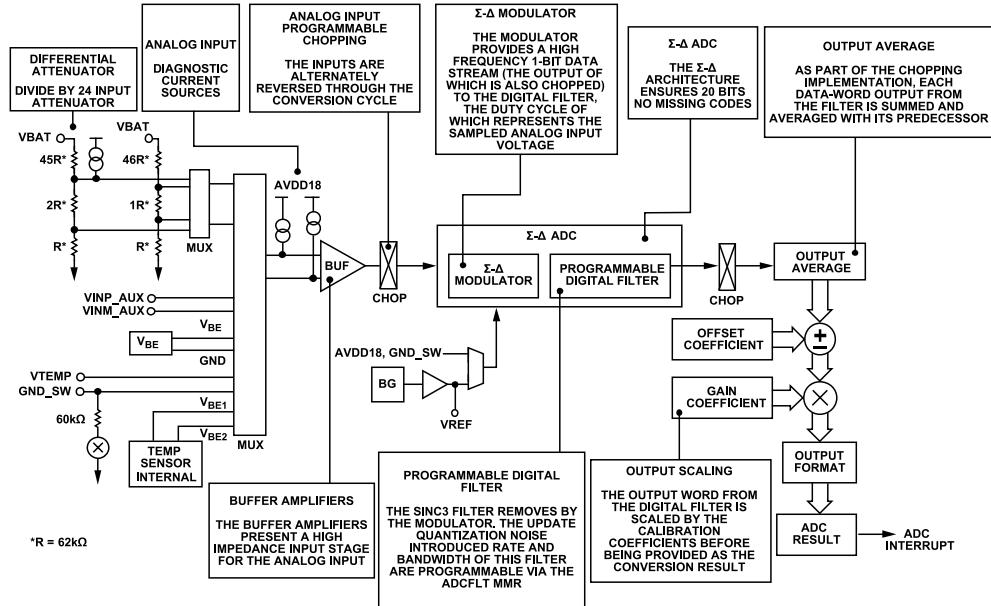


Figure 10. Voltage and Temperature ADC (ADC1) Top Level Overview

As shown in Figure 10, the ADC1 employs an identical Σ-Δ conversion technique, including a modified sinc3 or sinc4 low-pass filter to produce a 20-bit data conversion result at programmable output rates ranging from 4 Hz to 8 kHz in normal power mode and 1 Hz to 656 Hz in low power mode.

VBAT is routed to the ADC input via an on-chip, high voltage, divide by 24 resistive attenuator. In this configuration, an external RC filter network is not required.

The device die temperature can be measured using the on-chip temperature sensor. After power-up, the die temperature reflects the battery temperature because self heating has little or no contribution to the internal temperature sensor measurement.

By default, the time to a first valid (fully settled) data conversion result after configuring the input channel is three ADC conversion cycles, with chop mode turned off.

## ADC OPERATION

### Power Modes

The two power modes are available on the ADuCM330WFS/ADuCM331WFS, normal power mode and low power mode.

The ADCs can be configured for reduced (low power) or full power (normal) mode of operation using Register ADCMDE, Bit 3. The ARM Cortex-M3 processor can also be configured to operate in low power mode by configuring the PWRMOD register, Bits[2:0]. The processor power modes are independently controlled and are not related to the ADC power modes described in the [ADC Normal Power Mode](#) section and the [ADC Low Power Mode](#) section.

Refer to the ADuCM330WFS/ADuCM331WFS data sheet for details on current consumption.

### ADC Normal Power Mode

In ADC normal power mode, the current and voltage or temperature channels are fully enabled, and the ADC modulator clocked with 512 kHz. The user defined default ADC update rate for all channels in this mode is 1 kHz with ADC chop enabled unless noted otherwise.

ADC normal power mode is considered the default use case in functional safety relevant applications, and all safety measures provided or suggested that require the device to operate in this mode are also considered the default in functional safety relevant applications.

## ADC

### ADC Low Power Mode

In ADC low power mode, only ADC0 is enabled in a reduced power and accuracy configuration. The ADC modulator is clocked with 128 kHz. All of the ADC peripheral functions (result counter, digital comparator, and accumulator) can be enabled in low power mode, requiring no extra power. The ADC low power mode is designed for ADC0 gains of 64 to 512.

Typically, in low power mode, ADC0 is configured to run only at a low update rate and to continuously monitor battery current. The processor is in power-down mode and wakes up when ADC0 interrupts the core. This interrupt occurs when ADC0 detects a current conversion beyond a preprogrammed threshold, a set point, or a set number of conversions.

### Bipolar and Unipolar Configuration

The analog inputs to the ADuCM330WFS/ADuCM331WFS can accept either unipolar or bipolar input voltage ranges.

A bipolar voltage does not imply that the device can handle negative voltages with respect to ground. The input range can vary above or below the common-mode voltage by the value of  $V_{REF}$  as long as the absolute input voltage range is not exceeded.

Refer to the ADuCM330WFS/ADuCM331WFS data sheet for the ADC absolute input range.

### Typical ADC Modes of Operation

The ADC can be configured to operate in one of four different general modes of operation, as follows:

- ▶ ADC conversion: can be continuous conversions at a fixed rate or single conversions triggered by software.
- ▶ ADC idle mode: the ADC is fully powered on, but held in reset.
- ▶ ADC calibration modes: these modes remove any ADC and system errors where possible.
- ▶ ADC power-down modes: the ADC is powered down to reduce overall system power consumption.

### Conversion Modes

In normal ADC operation mode, the following two conversion modes are possible:

- ▶ Single conversion:  $ADCMDE = 0x2$ . A single ADC conversion can be initiated in software by setting Bit 1 of the  $ADCMDE$  register. After a single conversion is completed, the ADC returns to idle mode.
- ▶ Continuous conversion:  $ADCMDE = 0x1$ . Continuous conversion mode results in the  $ADCxDAT$  register being updated at the sampling rate selected by the  $ADCFLT$  register.

When a conversion is complete in either mode, the ready flag in the  $ADCSTA$  register is asserted, indicating that the ADC result is present in the  $ADC0DAT$  register or the  $ADC1DAT$  register for reading. These ready flags can be configured to flag an interrupt flag to the ARM Cortex-M3 processor. If an error occurs in the conversion due to an underrange or overrange error in the input voltage for either ADC, the valid bit in the ADC result is asserted, indicating invalid data and the error bit is set in the appropriate  $ADCSTA$  register (Bit 13 or Bit 12).

For functional safety relevant applications, configure the ADCs to trigger an interrupt when a conversion is complete.

### ADC Idle Mode

In idle mode, the ADC is fully powered on, but held in reset. The ADC enters this mode after calibration or between single conversions. Place the device in idle mode when changing any ADC settings.

### Power-Down Mode

In power-down mode, the ADCs and the input buffers are fully powered off for maximum power reduction. Place the device in power-down mode only when the entire device is ready to enter hibernate mode.

Before entering hibernate mode, complete the following ADC power-down sequence:

```
set idle mode          (ADCMDE)
disable 1.2Vref       (HRFCTRL)
disable 1.2Vrefbuffer (IRFPD)
```

**ADC**

disable ADC operation	(all other ADC MMRs)
disable ADC interrupts	(ADCMSKI)
disable ADC1	(ADC1CON)
disable ADC0	(ADC0CON)
_DSB()	(optional)
enter PWDN Mode	(ADCMDE)

**Modifying ADC Settings**

When changing ADC settings, switch the ADCs into idle mode, which holds ADCs in reset while they remain fully settled. The user must avoid powering down the ADCs, either individually via Register ADCxCON, Bit 19 or both at the same time via Register ADCMDE, Bits[2:0].

With data output rates larger than 1 kHz, powering down the ADCs can result in the ADCs not being fully settled when the next conversion begins.

set Idle Mode	(ADCMDE)
change ADC1	(ADC1CON)
change ADC0	(ADC0CON)
change ADC operation	(all other ADC MMRs)
Wait(100us)	(optional)
set ADC operation Mode	(ADCMDE)

**ADC Power-Up Sequence**

The following ADC power-up sequence must be used after the device exits hibernate mode or the ADC exits power-down mode.

Using the power-up sequence after the device exits hibernate mode or after the ADC exits power-down mode ensures the ADCs are operational and synchronized with the first conversion result.

config 1.2Vref	(HRFCTRL)
enable 1.2Vrefbuffer	(IRFPD)
enable ADC1	(ADC1CON)
enable ADC0	(ADC0CON)
set Idle Mode	(ADCMDE)
setup ADC operation	(all other ADC MMRs)
Wait(500us)	
set ADC operation Mode	(ADCMDE)

**ADC CALIBRATION**

As the top level diagrams of [Figure 9](#) and [Figure 10](#) show, the normal signal path through the ADC channels can be described in the following steps:

1. An input voltage is applied through an input buffer (and PGA, in the case of the ADC0) to the Σ-Δ modulator.
2. The modulator output is applied to a programmable digital decimation filter.
3. The filter output result is averaged, if chopping is used.
4. An offset value (ADCxOF) is subtracted from the result.
5. This result is scaled by a gain value (ADCxGN).
6. The result is formatted as twos complement/unipolar or clamped to positive full-scale or negative full-scale.

Each ADC channel (current, voltage, and temperature) has a specific offset and gain correction or calibration coefficient associated with it. These coefficients are stored in an MMR-based offset register and gain register (ADCxOF and ADCxGN). The offset register and gain register can be used to remove internal ADC related and external system level offset and gain errors.

## ADC

If the chop bit (Register ADCFLT, Bit 15) is set, internal ADC offset errors are minimized, and an offset calibration may not be required. If chopping is disabled, however, an initial offset calibration is required and may need to be repeated, particularly after a large change in temperature. For further information on chopping, refer to the [AN-609 Application Note](#).

The ADCxOF and ADCxGN registers are loaded at power-on with factory defined calibration values. These calibration values vary from device to device, reflecting the manufacturing variability of internal ADC circuits. These registers can also be overwritten by user code to apply application specific calibration coefficients.

When a system calibration is initiated, the ADC generates its calibration coefficient based on an externally generated zero-scale voltage and full-scale voltage, which are applied to the external ADC input for the duration of the calibration cycle. The coefficients are written in the ADCxDAT MMR of the ADC channels. The coefficients are not automatically written in the ADCxOF MMR or ADCxGN MMR. User code must copy these values to their appropriate registers.

The duration of an offset calibration is a full ADC filter settling time before returning the ADC to idle mode. When a calibration cycle is initiated, any ongoing ADC conversion is immediately halted, the calibration is automatically carried out at an ADC update rate programmed into ADCFLT, and the ADC returns to idle after any calibration cycle. It is strongly recommended that ADC calibration be initiated at as low an ADC update rate as possible (high sinc3 filter decimation factor (SF) value in ADCFLT) to minimize the impact of ADC noise during calibration.

For functionally safe operation of the device, execution of all ADC safety measures require the Analog Devices factory default calibration values.

### Calibrating the Temperature Channel

No gain and offset calibration is required for internal temperature sensing when the chop bit in the ADCFLT register is set. By copying the factory calibrated gain and offset coefficients for the internal temperature sensor into the ADC2GN register and the ADC2OF register, the device becomes operational when switching the ADC1 channel to internal temperature sensing. Refer to the [ADC1 Control Register](#) section for details.

The factory calibrated coefficients are stored in the 0x000207EA memory location for the ADC2GN register and 0x000207E8 for the ADC2OF register.

### Calibrating the Voltage Channel

To calibrate the offset and gain of the voltage channel, a two-point calibration method must be used. This method consists of converting two known voltages (for example, 8 V and 16 V) to determine the slope and offset of the transfer function. The gain coefficient can be divided by the calculated slope to improve the gain error.

The offset error can be reduced by writing  $\frac{1}{4}$  of the calculated offset (in unipolar codes) into the ADC1OF MMR.

### Calibrating the Current Channel

A gain calibration, particularly in the context of ADC0 (with internal PGA), may need to be carried out at all relevant system gain ranges, depending on system accuracy requirements.

If it is not possible to apply an external full-scale current on all gain ranges, the user can apply a lower current and scale the result produced by the calibration. For example, apply a 50% current, divide the ADC0DAT value produced by two, and write this value back into ADC0GN.

Because ADC0GN is a 16-bit register, a lower limit must be applied to the input signal for system calibration. The input span (difference between the system zero-scale value and the system full-scale value) must be greater than 40% of the nominal full-scale-input range, that is,  $>40\%$  of  $V_{REF}/\text{gain}$ .

The on-chip Flash/EE memory can be used to store multiple calibration coefficients. These coefficients can be copied by user code directly into the relevant calibration registers, as appropriate, based on the system configuration.

A factory, or end of line, calibration for ADC0 is a two-step procedure, as follows:

1. Apply the 0 A current. Configure the ADC in the required PGA setting and other required settings, and write to Register ADCMDE, Bits[2:0] to perform a system zero-scale calibration. This process writes a new offset calibration value into ADC0DAT. User code must store this value into ADC0OF or into Flash/EE memory.

## ADC

2. Apply a full-scale current for the selected PGA setting. Write to Register ADCMDE, Bits[2:0] to perform a system full-scale calibration. This process writes a new gain calibration value into ADC0DAT. This value must be copied by user software to the ADC0GN MMR or into Flash/EE memory.

To reduce the influence of noise on gain and offset errors during calibration, it is advisable to use either the lowest available conversion rate or to use the average of a sufficient number of samples taken at the desired conversion rate.

The actual gain, and the required scaling coefficient for zero gain error, varies slightly from device to device and at different PGA settings. The value downloaded into ADC0GN at power-on reset represents the scaling factor for a PGA gain of 8. There is some level of gain error if this value is used at different PGA settings. User code can run ADC calibrations and overwrite the calibration coefficients to correct the gain error at the current PGA setting.

### Understanding the Offset and Gain Calibration

The output of the average block in the ADC signal flow can be considered a fractional number with a span for a positive full-scale or negative full-scale input of approximately  $\pm 0.75$ . The span is less than  $\pm 1.0$  because there is attenuation in the modulator to accommodate some overrange capacity on the input signal. The exact value of the attenuation varies slightly between devices because of manufacturing tolerances.

The offset coefficient is read from the ADCxOF calibration register. This value is a 24-bit, twos complement number.

A positive value of ADCxOF indicates that, when offset is subtracted from the output of the filter, a negative value is added. The nominal value of this register is 0x0000, indicating zero offset is to be removed. The actual offset of the ADC can vary slightly between devices and at different PGA gains. The offset within the ADC is minimized if chopping mode is active (Register ADCFLT, Bit 15 = 1).

The gain coefficient (ADCxGN) is a unitless scaling factor. The nominal value ( $ADCxGN_{NOM}$ ) of this register equals 0x5555, corresponding to a multiplication factor of 1.3333. This factor scales the nominal  $\pm 0.75$  signal to produce a full-scale output signal of  $\pm 1.0$ , which is checked for overflow and underflow and converted to twos complement or unipolar mode, as appropriate, before being output to the data register.

The ADC transfer function, taking offset and gain calibration factors into consideration, can be described as follows.

For ADC0, with the PGA scaling enabled,

$$ADC0DAT = \left( \frac{V_{IN} \times (2^{28} - 1)}{V_{REF}} \times PGA\ Scale - ADC0OF \times \frac{4}{3} \times \frac{2^9}{2^4} \div GN \right) \times \frac{ADC0GN}{ADC0GN_{NOM}} \quad (7)$$

For the current ADC, with the PGA scaling disabled,

$$ADC0DAT = \left( \frac{V_{IN} \times (2^{28} - 1)}{V_{REF}} - ADC0OF \times \frac{4}{3} \times \frac{2^9}{2^4} \div GN \right) \times \frac{ADC0GN}{ADC0GN_{NOM}} \quad (8)$$

For the voltage ADC,

$$ADC1DAT = \left( \frac{V_{IN} \times (2^{28} - 1)}{V_{REF}} - ADC1OF \times \frac{4}{3} \times \frac{2^9}{2^4} \right) \times \frac{ADC1GN}{ADC1GN_{NOM}} \quad (9)$$

$V_{IN}/24$  is not required for the VINx\_AUX inputs.

For the temperature ADC,

$$ADC2DAT = \left( \frac{V_{IN} \times (2^{28} - 1)}{V_{REF}} - ADC2OF \times \frac{4}{3} \times \frac{2^9}{2^4} \right) \times \frac{ADC2GN}{ADC2GN_{NOM}} \quad (10)$$

For these equations, note the following:

- ▶  $2^9/2^4$  is used to convert the ADCxOF format (24-bit data) to ADCxDAT format (32-bit data).
- ▶ 4/3 is used to scale ADCxOF data back to actual data, because ADCxOF is Factor 0.75 of the actual offset.
- ▶  $ADCxGN_{NOM} = 0x5555$ .
- ▶ ADC works in twos complement mode.

## ADC

### Calibration Mode

There are several calibration modes available on the device, which are controlled by the ADC mode register, ADCMDE (see [Table 84](#)), and are described in this section. It is strongly recommended that these ADC calibration methods be initiated at the lowest ADC update rate possible (high SF value in ADCFLT) to minimize the impact of ADC noise during calibration. Do not use calibration registers for coarse scaling of input ranges.

#### Self Offset Calibration: ADCMDE = 0x4

In this mode, an offset calibration of the ADC is performed on any enabled ADC using an internally generated 0 V signal. The calibration is carried out at the user programmed ADC settings as a normal single ADC conversion. The offset calibration result is automatically written to the ADC data register of the respective ADC and represents the offset calibration coefficient required to compensate for the present ADC offset. The user needs to store the results to the ADCxOF register. After a device reset, the ADCxOF register is reloaded with the factory calibration value.

After the self offset calibration is performed, the ADCs enter idle mode.

#### Self Gain Calibration: ADCMDE = 0x5

In this mode, a gain calibration of the ADC against a selected reference voltage is performed on all enabled ADCs. A gain calibration is a two-stage process and takes twice the time of an offset calibration. The gain calibration result is automatically written to the ADC data register of the respective ADC and represents the gain calibration coefficient required to compensate for the present ADC gain error. The user needs to store the results to the ADCxGN register. The internal full-scale calibration does not work for gain settings greater than 1. After a device reset, the ADC gain register is reloaded with the factory calibration value.

After the self gain calibration is performed, the ADCs enter idle mode.

#### System Zero-Scale Calibration: ADCMDE = 0x6

In this mode, a zero-scale calibration is performed on enabled ADC channels against an external zero-scale voltage driven at the ADC input pins. Usually, the selected channel is shorted externally. The zero-scale calibration result is automatically written to the ADC data register of the respective ADC and represents the offset calibration coefficient required to compensate for the present input offset seen by the ADC. The user needs to store the results to the ADCxOF register. After a device reset, the ADCxOF register is reloaded with the factory calibration value.

After the self zero-scale calibration is performed, the ADCs enter idle mode.

#### System Full-Scale Calibration: ADCMDE = 0x7

For the current channel, a system full-scale calibration can only be used when the PGA prescaling is enabled. For details, refer to the [Programmable Gain Amplifier](#) section.

In this mode, a system full-scale calibration is performed using the enabled ADC channels against an external full-scale voltage driven at the ADC input pins. The system full-scale calibration result is automatically written to the ADC data register of the respective ADC and represents the gain calibration coefficient required to compensate for the present input gain error. The user needs to transfer the results to the ADCxGN register. After a device reset, the ADC gain register is reloaded with the factory calibration value.

After the self full-scale calibration is performed, the ADCs enter idle mode.

When the ADC is delivering samples at a set ADC conversion rate frequency ( $f_{ADC}$ ), the user must take care when modifying the ADCxGN register and ADCxOF register to avoid writing to them while the ADC is reading these registers. Ensure that the ADC is in idle mode when modifying the ADCxGN register and ADCxOF register, or ensure that the ADCxGN register and ADCxOF register are modified between the start of the conversion to  $1/f_{ADC} - 344$  clock cycles (16 MHz).


### ADC DIGITAL FILTER RESPONSE

The frequency response of all ADuCM330WFS/ADuCM331WFS ADCs is dominated by the low-pass filter characteristic of the on-chip sinc3 or sinc4 digital filters. The sinc3 or sinc4 filters are used to decimate the ADC Σ-Δ modulator output data bit stream and to generate a 20-bit data result. The digital filter response is identical for both ADCs and is configured via the 20-bit ADC filter (ADCFLT) register. The filter selection affects the overall throughput rate. Noise resolution of the ADCs is determined by the programmed ADC throughput rate. In the case of the current ADC, the noise resolution is determined by the throughput rate and selected gain.

## ADC

The overall frequency response and the ADC throughput is dominated by the configuration of the SF bits (Register ADCFLT, Bits[6:0]) and the averaging factor (AF) bits (Register ADCFLT, Bits[13:8]). Due to limitations on the digital filter internal data path, there are some limitations on the allowable combinations of SF and AF that can be used to generate a required ADC output rate. This restriction limits the minimum ADC update in normal power mode to 4 Hz (chop on, AF = 60, SF = 31). The calculation of the ADC throughput rate is detailed in [Table 87](#) for the sinc3 and sinc4 filters.

The default ADCFLT value (0x0007) configures the ADCs for a throughput rate of 1.0 kHz with all other filtering options (chop, running average, averaging factor, and sinc3 modify) disabled. A typical filter response based on this default configuration is shown in [Figure 11](#).

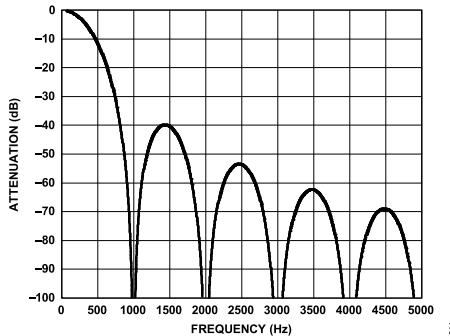


*Figure 11. Typical Sinc3 Digital Filter Response at  $f_{ADC} = 1.0$  kHz (ADCFLT = 0x0007)*

An additional modify bit, NOTCH2 (Register ADCFLT, Bit 7), is available in the ADCFLT register. This additional notch is set by the user code to modify the standard sinc3 or sinc4 frequency response, increasing the filter stop-band rejection by approximately 5 dB. The filter modification is achieved by inserting a second notch (NOTCH2) at

$$f_{NOTCH2} = 1.333 \times f_{NOTCH} \quad (11)$$


where  $f_{NOTCH}$  is the location of the first notch in the response. [Figure 12](#) shows the modified 1 kHz filter response when the NOTCH2 bit is active. The new notch is visible at 1.33 kHz. The new notch to an improvement in stop band rejection when compared to the standard 1 kHz response.

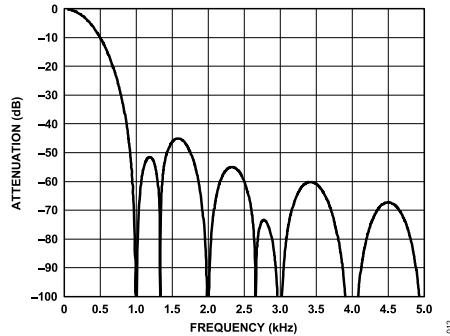

*Figure 12. Modified Sinc3 Digital Filter Response at  $f_{ADC} = 1.0$  kHz (ADCFLT = 0x0087)*

At very low throughput rates, the chop bit in the ADCFLT register can be enabled to minimize offset errors and, more importantly, temperature drift in the ADC offset error.

Two primary variables (sinc3 decimation factor and averaging factor) are available to allow the user to select an optimum filter response, trading off filter bandwidth against ADC noise. For example, with the chop bit (Register ADCFLT, Bit 15) set to 1, increasing the SF value (Register ADCFLT, Bits[6:0]) to 0x1F (31 decimal) and selecting an AF value (Register ADCFLT, Bits[13:8]) of (22 decimal) 0x16 results in an ADC throughput of 10 Hz. The typical digital filter response is shown in [Figure 13](#).

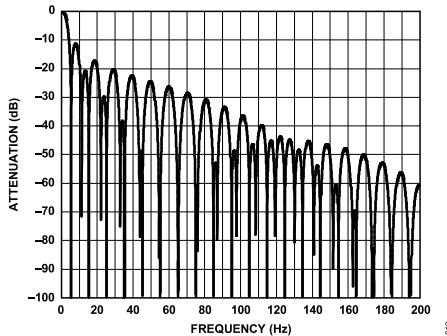**ADC**Figure 13. Typical Digital Filter Response at  $f_{ADC} = 10$  Hz (ADCFLT = 0x961F)

In ADC low power mode, the  $\Sigma\Delta$  ADC modulator is clocked four times slower than in normal mode. Subsequently, for the same ADCFLT configurations, all filter values must be scaled by the same factor.

In general, it is possible to program different values of SF and AF in the ADCFLT register and achieve the same ADC update rate. In practical terms, the trade-off with any value of ADCFLT is frequency response vs. ADC noise. For optimum filter response and ADC noise when using combinations of SF and AF, the best practice is to choose an SF in the range of 16 decimal to 40 decimal, or 0x10 to 0x28, and increasing the AF value to achieve the required ADC throughput. Table 73 shows some common ADCFLT configurations.

Table 73. Common Sinc3 ADCFLT Configurations

ADC Mode	SF	AF	Other Configurations	ADCFLT	$f_{ADC}$	Settling Time ( $t_{SETTLING}$ )
Normal	0x1F	0x16	Chop on	0x961F	10 Hz	0.2 sec
Normal	0x07	0x00	Chop off	0x0007	1 kHz	3 ms
Normal	0x07	0x00	Chop off, NOTCH2 on	0x0087	1 kHz	3 ms

**DIGITAL FILTER OPTIONS****Example Values for SF and AF**

The following are examples for AF values and SF values in ADC normal mode:

- ▶  $f_{ADC} = 1$  kHz: chop = 0, AF = 0, SF = 7
- ▶  $f_{ADC} = 1$  kHz: chop = 0, AF = 1, SF = 1 (single cycle settling)
- ▶  $f_{ADC} = 50$  Hz: chop = 0, AF = 0, SF = 127
- ▶  $f_{ADC} = 10$  Hz: chop = 1, AF = 22, SF = 31
- ▶  $f_{ADC} = 4$  Hz: chop = 1, AF = 60, SF = 31 (3.97 Hz)

Enabling the running average by 2 (RAVG2) bit improves noise performance.

An example for an AF value and SF value in ADC low power mode is  $f_{ADC} = 10$  Hz: chop = 1, AF = 2, SF = 39 (modulator clock frequency ( $f_{MOD}$ ) = 128 kHz).

**ADC Conversion Rates and Settling Times**

Table 74. ADC Conversion Rates and Settling Times

SINC4_EN	Chop Enabled	Running Average	Averaging Factor	$f_{ADC}^1$	$t_{SETTLING}^2$
No	No	No	No	$f_{MOD} \div (64 \times (SF + 1))$	$3 \div f_{ADC}$
No	No	Yes	No	$f_{MOD} \div (64 \times (SF + 1))$	$4 \div f_{ADC}$
No	No	No	Yes	$f_{MOD} \div (64 \times (SF + 1) \times (3 + AF))$	$1 \div f_{ADC}$
No	No	Yes	Yes	$f_{MOD} \div (64 \times (SF + 1) \times (3 + AF))$	$2 \div f_{ADC}$
No	Yes	Yes or no	Yes or no	$f_{MOD} \div (64 \times (SF + 1) \times (3 + AF) + 3)$	$2 \div f_{ADC}$
Yes	No	No	Not applicable	$f_{MOD} \div (64 \times (SF + 1))$	$4 \div f_{ADC}$
Yes	No	Yes	Not applicable	$f_{MOD} \div (64 \times (SF + 1))$	$5 \div f_{ADC}$

## ADC

**Table 74. ADC Conversion Rates and Settling Times (Continued)**

SINC4_EN	Chop Enabled	Running Average	Averaging Factor	$f_{ADC}^1$	$t_{SETTLING}^2$
Yes	Yes	Yes or no	Not applicable	$f_{MOD} \div (64 \times (SF + 1) \times 4) + 3$	$2 \div f_{ADC}$

<sup>1</sup>  $f_{MOD} = 512$  kHz in normal mode and 128 kHz in low power mode.

<sup>2</sup> For  $t_{SETTLING}$ , an additional 60  $\mu$ s (approximately) per ADC is required before the first ADC result is available.

**Table 75. Allowable Combinations of SF and AF**

SF and AF <sup>1</sup>	0	1 to 7	8 to 62
1 to 31	Yes	Yes	Yes
32 to 63	Yes	Yes	No
64 to 127	Yes	No	No

<sup>1</sup> The combination limit of allowed SF settings with AF settings shown in Table 75 is only for sinc3 mode.


The ADuCM330WFS/ADuCM331WFS also incorporate a sinc4 digital filtering option. The sinc4 filter offers reduced noise, particularly at high (>2 kHz) output rates, and is recommended for this application. Visit the tools and simulations section of the ADuCM330WFS or ADuCM331WFS product page to obtain the ADuCM330WFS/ADuCM331WFS digital filter frequency response calculator showing the ADC frequency response for both sinc3 and sinc4 filtering options.

For sinc4 mode, AF is not applicable, and the user must ensure that AF is always set to zero. SF must be no greater than 0x0F. If SF is set to greater than 0x0F in sinc4 mode, the SF is automatically forced to 0x0F.


## FAST TEMPERATURE CONVERSION MODE

The device die temperature can be measured using the on-chip temperature sensor.

By default, the time to a first valid (fully settled) result after switching the ADC input from the voltage to the temperature channel or from the temperature to the voltage channel is three ADC conversion cycles with chop mode turned off, as shown in Figure 14. ADC0 sampling refers to the current channel ADC, and ADC1 sampling refers to the voltage and temperature channel ADC operating in voltage measurement mode or in temperature measurement mode.

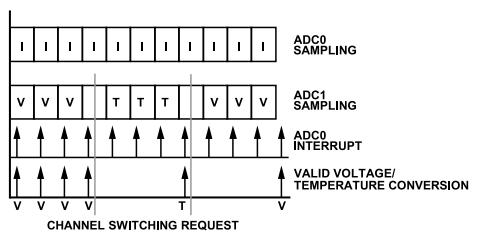**Figure 14. Default Temperature Mode, Chop Off**

A fast temperature conversion mode is provided on the temperature channel to minimize the switching delay between voltage conversion and temperature conversions, as shown in Figure 15 and Table 76.

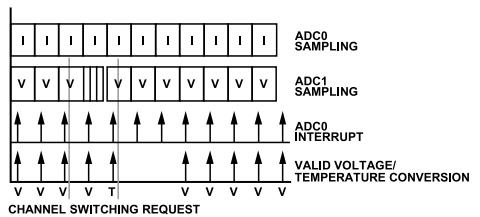**Figure 15. Fast Temperature Mode, Chop Off (ADCFLT = 0x07)**

A request for a fast temperature conversion is executed with a delay of one ADC conversion. The fast temperature mode must be cleared after the temperature measurement is available and before a new measurement request.

## ADC

**Table 76. Fast Temperature Mode**

ADC0 Interrupts	Valid Flags	User Code
1 to 2	ADC0RDY and ADC1RDY	Voltage = ADC1DAT.
3	ADC0RDY and ADC1RDY	Voltage = ADC1DAT. Set fast temperature request bit.
4	ADC0RDY and ADC1RDY	Voltage = ADC1DAT. This data must be read for the next temperature channel flag to be valid.
5	ADC0RDY and ADC2RDY	Temperature = ADC1DAT. Clear fast temperature request bit.
6 and 7	ADC0RDY	
8 to 12	ADC0RDY and ADC1RDY	Voltage = ADC1DAT.

The fast temperature option cannot be used on the first conversion after ADC power-on. The option can only be set after at least the first ADC interrupt. Waiting for a valid ADC result is not necessary. When using the fast temperature mode, ensure that SF  $\geq$  1. In addition, a conversion rate of 1 ms is recommended in this mode of operation to ensure that the fast result occurs simultaneously with the current channel result.

When changing the configuration of the ADCs by writing to ADCMDE, ADC0CON, or ADCFLT, the fast temperature bit in the ADCCFG register must also be cleared to ensure correct operation. This condition is similar to a first conversion after ADC power-on.

## ADC DIAGNOSTICS

The ADuCM330WFS/ADuCM331WFS incorporate several hardware features allowing the device to perform on-chip diagnostics, which include the following:

- ▶ A current channel input shorting capability, which is controlled via the ADC0CH bits in the ADC0CON register.
- ▶ A defined AVDD18  $\div$  136 input voltage on the current channel, which is controlled via the ADC0CH bits in the ADC0CON register.
- ▶ An auxiliary current channel input, which is controlled via the ADC0CH bits in the ADC0CON register.
- ▶ A defined temperature independent ( $V_{REF+}$  to  $V_{REF-}$ ) input voltage, which is controlled via the ADC0CH bits in the ADC0CON register.
- ▶ A pair of 50  $\mu$ A current sources at each ADC channel, which are controlled via the ADCxDIAGx bits in the ADCxCON register.
- ▶ A current source for the voltage channel attenuator, which is controlled via the VE bit in the HVDCFG0 register.
- ▶ A second, uncalibrated, 48:1 attenuator, which is controlled by the ASEL bit in the HVDCFG0 register.
- ▶ An auxiliary voltage and temperature channel input, which is controlled via the ADC1CH bits in the ADC1CON register.
- ▶ A defined temperature dependent ( $V_{BE}$  to GND) input voltage on the voltage and temperature channel, which is controlled via the ADC1CH bits in the ADC1CON register.
- ▶ An internal shorting capability ( $V_{BE}$  and  $V_{BE}$ ), which is controlled via the ADC1CH bits in the ADC1CON register.

For details on ADC diagnostics and related safety measures, refer to the ADuCM330WFS/ADuCM331WFS safety manual.

## OTHER ADC SUPPORT CIRCUITS


### Internal and External 1.2 V Voltage Reference

The ADuCM330WFS/ADuCM331WFS have an on-chip 1.2 V high precision voltage reference.

It is possible to apply an external reference to the ADuCM330WFS/ADuCM331WFS. To use an external reference, the following steps are required:

1. Power down the internal reference buffer by setting IRFPD = 0x01. This setting is also the default state.
2. Apply an external reference to the VREF pin (1.2 V).

The operating mode of the ADCs is not affected by changes to the reference configuration.

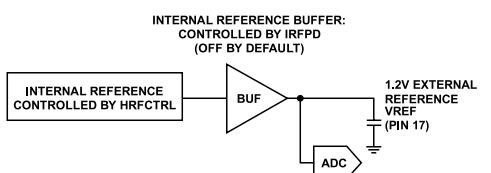

**Figure 16. ADC Reference Configuration**

## ADC

### Programmable Gain Amplifier

The primary ADC (current ADC) incorporates an on-chip PGA. The gain is controlled by the ADC0CON register. The PGA allows signals of very small amplitude to be amplified while still maintaining low noise performance. Internally, the PGA requires its output range to be limited to  $<\pm 1$  V while still allowing a 1.2 V reference to be used.

To accommodate this requirement, use Bits[11:10] in the ADC0CON register, PGASCALE. Clearing these bits (default state) activates a 13/16 × 14/16 scaling factor and maintains compatibility with gain ranges from previously released Analog Devices precision battery sensors.

If the PGASCALE bits are both set to 1, the user must ensure that the input to the PGA does not exceed 1 V/gain.

The PGA is internally divided into two PGA stages with PGA scaling 13/16 applying to stage 1 of the PGA and PGA scaling 14/16 applying to the stage 2 of PGA. The resulting overall PGA scaling factors are listed in [Table 77](#).

**Table 77. PGA Scaling**

Register ADC0CON, Bits[3:0] = ADC0PGA	PGASCALE	Scaling 14/16	Scaling 13/16	Resulting PGA Scaling Factor Applied
Gain = 2 to 512	11	1	1	Gain × 1
Gain = 2 to 512	10	1	Gain × (13 ÷ 16)	Gain × (13 ÷ 16)
Gain = 32 to 512	01	Gain × (14 ÷ 16)	1	Gain × (14 ÷ 16)
Gain = 32 to 512	00	Gain × (14 ÷ 16)	Gain × (13 ÷ 16)	Gain × (14 ÷ 16) × (13 ÷ 16)


### ADC Comparator and Accumulator

The current ADC result can be compared to a preset threshold level (ADC0TH) configured via the ADCCFG register. An interrupt is generated if the absolute (sign independent) value of the ADC result is greater than the preprogrammed comparator threshold level. An ADC interrupt is also generated when the threshold counter reaches a preset value (ADC0RCL).

Finally, a 32-bit accumulator (ADC0ACC) contains the result of multiple primary conversions. User code can read the accumulated value directly (ADC0ACC) without any further software processing.

### ADC Ground Switch

The ADuCM330WFS/ADuCM331WFS feature an integrated ground switch pin named GND\_SW. This switch allows the user to disconnect ground from external devices and allows a connection to ground using a resistor, reducing the number of external components required for an NTC circuit, as shown in [Figure 17](#). The control bit for this switch is in Register ADCCFG, Bit 7. The ground switch feature can be used to reduce power consumption on application specific boards by preventing current flowing through the NTC.

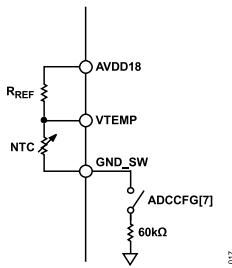

**Figure 17. Internal Ground Switch Configuration**

### ADC CHOPPING

ADC chopping is a technique that is used to cancel the offset and low frequency errors that arise in the signal chain of an ADC. See the [AN-609 Application Note](#) for further background information. The ADCs on the ADuCM330WFS/ADuCM331WFS implement a chopping scheme whereby the inputs to the ADC are repeatedly reversed, or chopped. The resulting conversions are inverted from one measurement cycle to the next. By averaging the two input measurements, the offset is removed and the new value updated to the ADC data MMR. The chopping scheme results in low dc offset and offset drift, which is beneficial in applications where drift and noise rejection are required.

Chopping is not active by default, meaning that the default configuration has an offset in the conversion result. Two conversion periods are required for an initial measurement result when there is a change to the ADC input, for example, when the channel or gain is changed or following a reset. The effect on settling time is shown in [Table 74](#).

**ADC****ADC MEMORY MAPPED REGISTERS****Table 78. ADC Reference Control Memory Mapped Registers (Base Address 0x40008800)**

Offset	Name	Description	Access	Reset
0x0008	HRFCTRL	Internal 1.2 V reference control register	Read/write	0x0002
0x0024	IRFPD	Internal reference buffer power-down register	Read/write	0x0001

**Table 79. ADC Memory Mapped Registers (Base Address 0x40030000)**

Offset	Name	Description	Access	Reset
0x0000	ADCSTA	ADC status register	Read	0x0000
0x0004	ADCMSKI	ADC interrupt mask register	Read/write	0x00
0x0008	ADCMDE	ADC mode register	Read/write	0x0003
0x000C	ADC0CON	ADC0 control register	Read/write	0x00000000
0x0010	ADC1CON	ADC1 control register	Read/write	0x00000000
0x0018	ADCFLT	ADC filter configuration register	Read/write	0x00000007
0x001C	ADCCFG	ADC configuration register	Read/write	0x00
0x0020	ADC0DAT	ADC0 result register	Read	0x00000001
0x0024	ADC1DAT	ADC1 result register	Read	0x00000001
0x0030	ADC0OF	ADC0 offset calibration register	Read/write	Calibration value
0x0034	ADC1OF	ADC1 offset calibration register	Read/write	Calibration value
0x0038	ADC2OF	ADC2 offset calibration register	Read/write	Calibration value
0x003C	ADC0GN	ADC0 gain calibration register	Read/write	Calibration value
0x0040	ADC1GN	ADC1 gain calibration register	Read/write	Calibration value
0x0044	ADC2GN	ADC2 gain calibration register	Read/write	Calibration value
0x0048	ADC0RCL	ADC0 result counter limit register	Read/write	0x0001
0x004C	ADC0RCV	ADC0 result counter value register	Read	0x0000
0x0050	ADC0TH	ADC0 comparator threshold register	Read/write	0x00000000
0x0054	ADC0THC	ADC0 threshold counter limit register	Read/write	0x01
0x0058	ADC0THV	ADC0 threshold counter value register	Read	0x00
0x005C	ADC0ACC	ADC0 accumulator register	Read	0x00000000
0x0060	ADC0ATH	ADC0 accumulator threshold register	Read/write	0x00000000

**Internal 1.2 V Reference Control Register**

Address: 0x40008808, Reset: 0x0002, Name: HRFCTRL

**Table 80. HRFCTRL Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:2]	Reserved	Reserved. These bits must be set to 0.	
1	HRFAUTOB	0: automatic mode. The 1.2 V internal reference is controlled by the ADC. HRFPD is ignored. 1: user mode. The 1.2 V internal reference is controlled by HRFPD. This is the default state.	
0	HRFPD	0: enable the 1.2 V internal reference. 1: power down the 1.2 V internal reference.	SM90, SM91, SM100, SM101, SM110, SM111

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**Internal Reference Buffer Power-Down Register**

Address: 0x40008824, Reset: 0x0001, Name: IRFPD

**ADC****Table 81. IRFPD Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:1]	Reserved	Reserved. These bits must be set to 0.	
0	INTREFPD	0: enable internal reference buffer. 1: power down internal reference buffer. Gates in an external 1.2 V reference. This is the default state.	SM90, SM91, SM100, SM101, SM110, SM111

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**ADC Status Register**

Address: 0x40030000, Reset: 0x0000, Name: ADCSTA

All ADC interrupt sources are OR'ed to produce a single ADC interrupt to the Arm core. The user code then reads the ADCSTA MMR to determine the source of the interrupt. The ADC0RDY bit and the ADC1RDY bit are set simultaneously if both the ADC0 and ADC1 are enabled. If the internal temperature sensor or VTTEMP and GND\_SW input channel is selected, the ADC2RDY bit is set.

All the RDY bits are cleared by a read of the ADC0DAT MMR. Writing to the ADC0CON register also clears all the ADCSTA bits.

A change in the ADC1CON register only clears Register ADCSTA, Bit 1. This bit is also cleared by reading the ADC1DAT register.

If ADC0 is not enabled, all the RDY bits are cleared by a read of the ADC1DAT MMR.

To ensure synchronous sampling, the user reads the ADC1DAT register before reading the ADC0DAT register. Otherwise, a read of the ADC0DAT register clears the RDY1 flag, allowing the possibility of the ADC1DAT register being overwritten by new data before the ADC1DAT register is read.

The following list is a summary of how the status register flags are reset:

- ▶ The ADCxERR flags are set or cleared every time new data is written into the appropriate ADCxDAT MMR, setting the ADCxRDY bits. The flags are not cleared by a read of the ADCxDAT MMRs.
- ▶ Comparator and counter interrupts are cleared if the comparator or counter is disabled.
- ▶ The ADCxRDY bits are automatically cleared by the ADC if the ADC configuration is changed.
- ▶ The ADCxRDY flags are cleared by a read of the ADC0DAT register or a read of the ADC1DAT register if the ADC0 is not active.

All other interrupts and flags are also cleared if the ADC configuration is changed.

**Table 82. ADCSTA Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
15	ADCxCAL	ADC calibration status. 0: cleared to 0 after a write to any of the ADCMDE, ADCFLT, or ADC0CON registers. 1: set to 1 in hardware to indicate an ADC calibration cycle is complete.	
14	Reserved	Reserved.	
13	ADC1ERR	ADC conversion error status bit. Error in ADC1 conversion. 0: cleared after reading the ADCSTA register. 1: set to 1 when an underrange or an overrange error occurs in ADC1. This bit is set to 1 when the input voltage at VBAT exceeds 28.8 V. However, for voltages greater than 29.5 V, this bit is cleared again.	SM98
12	ADC0ERR	ADC conversion error status bit. Error in current ADC conversion. 0: clear after reading the ADCSTA register. 1: set to 1 when an underrange or an overrange error occurs in ADC0.	SM106
[11:7]	Reserved	Reserved.	
6	ADCINT	ADC interrupt. 0: cleared to 0 by reading ADC0DAT. 1: if the always interrupt mode is active, this bit generates an interrupt every $1/f_{ADC}$ , regardless of whether the digital filter is settled.	SM64, SM90, SM91, SM96, SM98, SM100, SM101, SM102, SM106, SM110, SM111, SM121

**ADC****Table 82. ADCSTA Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		The ADCxRDY flags must be read to determine if the ADC result is valid. For example, at the default ADCFLT value of 0x0007, this bit is asserted every 1.0 ms. The first two interrupts after reconfiguring the ADC cannot have the ADCxRDY bits set, but all subsequent interrupts can be set. However, using ADC interrupts as a constant 1 ms time base does not guarantee a periodic time base because the ADC time base is interrupted any time the current ADC is reconfigured.	
5	ADC0ATHEX	ADC current accumulator comparator threshold exceeded. 0: cleared by a reconfiguration of the ADC, or the accumulator comparator is disabled. 1: set if the absolute value of the accumulator exceeds the value written in the ADC0ATH register.	
4	ADC0THEX	ADC current comparator threshold exceeded. Valid only if the ADC current channel comparator is enabled. 0: cleared by a reconfiguration of the ADC, or if the ADC0TH comparator is disabled. 1: set if the absolute value of the ADC conversion result exceeds the value written in the ADC0TH register. If ADCOTH (ADC threshold counter) is also used, this bit is only set when the specified number of ADC conversions exceed the threshold.	SM106
3	ADC0OVR	ADC current channel fast overrange bit. 0: change the gain setting to clear this bit. 1: set if the ADC0 input is excessively (>30% approximate on some PGA settings) overrange, and the overrange detect function is enabled. This bit is updated every 125 µs.	SM106
2	ADC2RDY	Temperature conversion result ready bit. 0: cleared to 0 by reading the ADC1DAT and ADC0DAT registers (the registers must be read in this order). Reconfiguring ADC1 or ADC0 also clears this bit. 1: set to 1 at the end of a conversion if ADC1 is enabled and a temperature channel is selected. This generates an interrupt if the ADC interrupt is enabled and the corresponding bit in the ADCMSKI register is set. If this bit is set, the ADC cannot write further data to the ADC1DAT register. If the always interrupt mode is selected, this bit is a valid flag that indicates when the ADC1 digital filter has fully settled.	SM110, SM111, SM121
1	ADC1RDY	Voltage conversion result ready bit. 0: cleared to 0 by reading the ADC1DAT and ADC0DAT registers (the registers must be read in this order). Reconfiguring the ADC1 or ADC0 also clears this bit. 1: set to 1 at the end of a conversion if ADC1 is enabled and the voltage channel is selected. This generates an interrupt if the ADC interrupt is enabled and the corresponding bit in the ADCMSKI register is set. If this bit is set, the ADC cannot write further data to the ADC1DAT register. If the always interrupt mode is selected, this bit is a valid flag that indicates when the ADC1 digital filter has fully settled.	SM90, SM91, SM96, SM98
0	ADC0RDY	Current conversion result ready bit. 0: cleared to 0 by reading the ADC0DAT register. Reconfiguring ADC0 also clears this bit. 1: set to 1 at the end of a conversion if ADC0 is enabled. This generates an interrupt if the ADC interrupt is enabled and the corresponding bit in the ADCMSKI register is set. Reading the ADC0DAT register clears this bit. Reconfiguring the ADC0 also clears this bit. If this bit is set, the ADC cannot write further data to the ADC0DAT register. If the ADC result counter is active, RDY is only asserted after the required number of conversions has elapsed. If the always interrupt mode is selected, this bit is a valid flag that indicates when the ADC digital filter has fully settled.	SM64, SM100, SM101, SM102, SM106

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**ADC Interrupt Mask Register**

Address: 0x40030004, Reset: 0x00, Name: ADCMSKI

This MMR allows the ADC interrupt sources in the ADCSTA register to be individually masked. The bit positions are the same as the lower five bits of ADCSTA. If a bit is set to 1, the interrupt is enabled. The default value is 0x00, that is, all ADC interrupts are inactive.

The ADCMSKI register enables the lower bits of the ADCSTA register to generate an interrupt.

**ADC****Table 83. ADCMSKI Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
7	Reserved	Reserved. This bit must be set to 0.	
6	ADCINT	Mask Register ADCSTA, Bit 6. 0: disable the interrupt (default). 1: enable an interrupt when the ADCINT bit in the ADCSTA register is set.	
5	ADC0ATHEX	Mask Register ADCSTA, Bit 5. 0: disable the interrupt (default). 1: enable an interrupt when the ADC current accumulator comparator threshold is exceeded (the ADC0ATHEX bit in the ADCSTA register is set).	SM106
4	ADC0THEX	Mask Register ADCSTA, Bit 4. 0: disable the interrupt (default). 1: enable an interrupt when the ADC current comparator threshold is exceeded (the ADC0THEX bit in the ADCSTA register is set).	SM106
3	ADC0OVR	Mask Register ADCSTA, Bit 3. 0: disable the interrupt (default). 1: enable an interrupt when the ADC0OVR bit in the ADCSTA register is set.	SM106
2	ADC2RDY	Mask Register ADCSTA, Bit 2. 0: disable the interrupt (default). 1: enable an interrupt when the ADC2RDY bit in the ADCSTA register is set. This bit must be enabled for functional safety relevant applications.	
1	ADC1RDY	Mask Register ADCSTA, Bit 1. 0: disable the interrupt (default). 1: enable an interrupt when the ADC1RDY bit in the ADCSTA register is set. This bit must be enabled for functional safety relevant applications.	
0	ADC0RDY	Mask Register ADCSTA, Bit 0. 0: disable the interrupt (default). 1: enable an interrupt when the ADC0RDY bit in the ADCSTA register is set. This bit must be enabled for functional safety relevant applications.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**ADC Mode Register**

Address: 0x40030008, Reset: 0x0003, Name: ADCMDE

A write to the ADCMDE register immediately resets each active ADC, including the ADCxRDY bits and other ADCSTA flags. The full digital filter settling time must elapse before the first result with the new MMR programmed configuration is available. The one exception to this condition is that an interrupt can be provided before the filter is settled if the always interrupt mode bit is set.

**Table 84. ADCMDE Register Bit Description**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:6]	Reserved	Reserved. These bits must be set to 0.	
5	AINT	Always interrupt. 0: disable this function. 1: enables the ADC to always produce an interrupt $1/f_{ADC}$ after starting a new conversion, even if the digital filter is not settled. The ADCxRDY flags must be read to determine the validity of the ADC data registers. Bit 6 of the ADCSTA and ADCMSKI registers must be used in conjunction with this bit.	
4	Reserved	Reserved. This bit must be set to 0.	
3	ADCLP	ADC power mode. 0: enable ADC normal power mode ( $f_{MOD} = 512$ kHz). 1: enable ADC low power mode ( $f_{MOD} = 128$ kHz).	

**ADC****Table 84. ADCMDE Register Bit Description (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[2:0]	ADCMD	<p>ADC mode bits.</p> <p>000: ADC power-down mode. The ADC circuitry is powered off. This powers down the ADC and PGA.</p> <p>001: continuous convert mode. The enabled ADC(s) continuously produce conversions at <math>f_{ADC}</math>. The ADCxRDY bits must be cleared to enable new data to be written into the ADCxDAT registers.</p> <p>010: single convert mode. This performs a single conversion on the enabled ADC(s). The ADC enters idle mode after the RDY bit is set.</p> <p>011: idle mode. The ADC is powered up, but held in reset. The ADC enters idle mode after calibration.</p> <p>100: self offset calibration. Refer to the <a href="#">Self Offset Calibration: ADCMDE = 0x4</a> section for details.</p> <p>101: self gain calibration. Refer to the <a href="#">Self Gain Calibration: ADCMDE = 0x5</a> section for details.</p> <p>110: system zero-scale calibration (offset). Refer to the <a href="#">System Zero-Scale Calibration: ADCMDE = 0x6</a> section for details.</p> <p>111: system full-scale calibration (system). Refer to the <a href="#">System Full-Scale Calibration: ADCMDE = 0x7</a> section for details.</p>	SM64, SM90, SM91, SM96, SM98, SM100, SM101, SM102, SM106, SM110

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**ADC0 Control Register**

Address: 0x4003000C, Reset: 0x00000000, Name: ADC0CON

A write to the ADC0CON register resets the ADC0 and other enabled ADCs. The full digital filter settling time elapses before a result is available.

If the two ADCs are being reconfigured at the same time, ADC0CON must be written last to ensure that the voltage and temperature channel restarts converting at the same time as the current channel. However, if the voltage and temperature ADCs are powered down, there is a power-up delay before the voltage and temperature channel can start converting. This delay may mean that the ADC0 has started converting, and the voltage and temperature channel cannot start its conversion until ADC0 has provided an output.

**Table 85. ADC0CON Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
19	ADC0EN	Enable ADC0. 0: power down ADC0, RDY bit is cleared. 1: enable ADC0.	
18	Reserved	Reserved. This bit must be set to 0.	
[17:16]	ADC0BUFBP	ADC0 buffer bypass (positive, negative). 00: no buffer is bypassed. 01: negative buffer is bypassed. 10: positive buffer is bypassed. 11: both buffers are bypassed. This option must be used for hibernate mode only.	SM100, SM101, SM102
[15:14]	ADC0DIAG2	Diagnostic current bits. 00: current source off. 01: enable 50 $\mu$ A on IIN- _AUX. 10: enable 50 $\mu$ A on IIN+ _AUX. 11: enable 50 $\mu$ A on IIN+ _AUX and IIN- _AUX.	SM102
[13:12]	ADC0DIAG1	Diagnostic current bits. 00: current source off. 01: enable 50 $\mu$ A on IIN-. 10: enable 50 $\mu$ A on IIN+. 11: enable 50 $\mu$ A on IIN+ and IIN-.	SM102

**ADC****Table 85. ADC0CON Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[11:10]	PGASCALE	PGA scaling bits. If enabled, PGA scaling scales the PGA output by the selected scale factor. To obtain the correct ADC result, user software compensates for the scaling factor selected. For example, if 14/16 PGA scale is selected, user software must compensate by multiplying the ADC0DAT result by 16/14. See the ADC formulas in the <a href="#">Understanding the Offset and Gain Calibration</a> section for further details. 00: PGA gain is scaled by ((14/16) × (13/16)). 01: PGA gain is scaled by 14/16. 10: PGA gain is scaled by 13/16. 11: PGA scaling is disabled. No scaling.	SM100, SM101
9	ADC0CODE	Current ADC output coding. 0: twos complement (bipolar). 1: unipolar. In this configuration, any negative input signals have a conversion result of zero.	SM100, SM101
[8:6]	ADC0CH	Current ADC input channel select. 000: IIN+, IIN-. 001: IIN-, IIN-. Internal short configuration. 010: AVDD18 ÷ 136. Voltage input for ADC0 diagnostic. 011: IIN+_AUX, IIN-_AUX. Auxiliary channel. 100: VTEMP, GND_SW. External temperature channel input. Level shifter bypassed. 101: V <sub>REF+</sub> , V <sub>REF-</sub> . Positive full scale. Level shifter bypassed. 110: V <sub>BE</sub> , V <sub>BE</sub> . Internal short configuration. Level shifter bypassed. 111: reserved. This option must not be used.	SM100, SM101
5	Reserved	Reserved. This bit must be set to 0.	
4	ADC0REF	Current ADC reference selection. 0: internal reference (1.2 V) or external reference (see <a href="#">Figure 16</a> ). 1: AVDD18, AGND.	All ADC0 related safety measures
[3:0]	ADC0PGA	Current ADC gain select: 0000: gain = 1 (only use for a self gain calibration). 0010: gain = 4. 0011: gain = 8. 0100: gain = 16. 0101: gain = 32. 0110: gain = 64. 1001: gain = 512. Others: other selections must not be used.	SM100, SM101

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**ADC1 Control Register**

Address: 0x40030010, Reset: 0x00000000, Name: ADC1CON

A write to the ADC1CON register resets the ADC1. The ADC1 restarts at an appropriate time so that its outputs are synchronous with ADC0, that is, ADC0 is not reset by a change in the ADC1 configuration. The full ADC1 digital filter settling time must elapse before a voltage or temperature result is available.

**Table 86. ADC1CON Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
19	ADC1EN	Enable ADC1. 0: power down ADC1. ADC1RDY and ADC2RDY bits are cleared.	

**ADC****Table 86. ADC1CON Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		1: enable ADC1.	
18	Reserved	Reserved. This bit must be set to 0.	
[17:16]	ADC1BUFBP	ADC1 buffer bypass (positive, negative). 00: no buffer is bypassed. 01: negative buffer is bypassed. 10: positive buffer is bypassed. 11: both buffers are bypassed. This option must be used for hibernate mode only.	SM90, SM91
[15:14]	Reserved	Reserved. These bits must be set to 0.	
[13:12]	ADC1DIAG	Diagnostic current bits. 00: current source off. 01: enable 50 $\mu$ A to negative input. 10: enable 50 $\mu$ A to positive input. 11: enable 50 $\mu$ A to two differential inputs.	
[11:10]	Reserved	Reserved. These bits must be set to 0.	
9	ADC1CODE	Voltage and temperature ADC output coding. 0: twos complement (bipolar). 1: unipolar. In this configuration, any negative input signals have a conversion result of zero.	SM90, SM91
[8:6]	ADC1CH	Voltage and temperature ADC input channel select. 000: VBAT, AGND. VBAT attenuator. 001: VTEMP, GND_SW. External temperature sensor. 010: internal temperature sensor. 011: V <sub>BE</sub> , V <sub>BE</sub> . Internal short configuration. 100: VINP_AUX, VINM_AUX. Auxiliary voltage input. 101: GND, GND. Internal short configuration. 110: V <sub>BE</sub> , GND. Nonzero input (VIN) for ADC diagnostic. 111: V <sub>REF+</sub> , V <sub>REF-</sub> . Positive full-scale.	SM90, SM91, SM110, SM111
5	Reserved	Reserved. This bit must be set to 0.	
4	ADC1REF	Voltage and temperature ADC reference selection. 0: internal reference (1.2 V). 1: AVDD18, GND_SW pin.	
[3:0]	Reserved	Reserved. These bits must be set to 0.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**ADC Filter Configuration Register**

Address: 0x40030018, Reset: 0x00000007, Name: ADCFLT

The ADCFLT register controls the output speed of the ADC, which influences the noise of the ADC. A write to ADCFLT resets the ADCs.

More information on settling time and ADC output rate calculations is available in the ADuCM330WFS/ADuCM331WFS digital filter frequency response calculator available at [www.analog.com/ADuCM330WFS](http://www.analog.com/ADuCM330WFS) or [www.analog.com/ADuCM331WFS](http://www.analog.com/ADuCM331WFS).

**Table 87. ADCFLT Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
16	SINC4_EN	Sinc4 filter enable. 0: sinc filter is in sinc3 mode.	All ADC related safety measures

**ADC****Table 87. ADCFLT Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement
		1: sinc filter is in sinc4 mode. In this mode, the user must ensure that the AF bits in Register ADCFLT, Bits[13:8] are set to 0. When the output rate is <2 kHz, this bit must not be set. For an output rate $\geq 2$ kHz, setting this bit makes the filter a sinc4 filter. This bit is recommended when the output rate is greater than 2 kHz because the sinc4 filter is superior to the sinc3 in filtering out the quantization noise.	
15	Chop	Enables system chopping of the ADCs. 0: disable system chopping. 1: enable system chopping. Enable chopping to provide very low offset errors and drift. The settling time to a change in configuration equals one conversion period. The bit operates on all ADCs.	All ADC related safety measures
14	RAVG2	Enables a running average by 2. 0: disable running average function. 1: enable running average function. RAVG2 implements a simple running average by 2 function to reduce the ADC noise. It is automatically active when chopping is enabled and is an optional feature when chopping is inactive. RAVG2 does not reduce the output rate with the chop bit = 0, but does increase the settling time by one conversion.	All ADC related safety measures
[13:8]	AF	Averaging factor. Number of averages = AF + 1. AF implements a programmable, first-order, sinc postfilter. This additional averaging factor further reduces the ADC output rate. There are restrictions on the maximum allowable values of SF and AF. Refer to <a href="#">Table 74</a> for details.	All ADC related safety measures
7	NOTCH2	Inserts a notch at $f_{NOTCH2} = 1.2 \times f_{NOTCH}$ . NOTCH2 modifies the frequency response of the sinc3/sinc4 filter to improve the stop band rejection. The worst case rejection at $f > f_{ADC}$ improves to -45 dB, compared to -40 dB with the default sinc3 filter, where $f$ is the sampling frequency. There is a slight increase in ADC noise if this is active. The second notch is generally at $(4 \div 3) \times$ the main sinc notch to generate notches at both 50 Hz and 60 Hz.	All ADC related safety measures
[6:0]	SF	Sinc3 filter decimation factor. Default value: 0x7. SF controls the oversampling rate and decimation factor of the sinc3 filter and sinc4 filter. The output rate from the sinc3 filter and sinc4 filter can be calculated with the equations given in <a href="#">Table 74</a> .	All ADC related safety measures

**ADC Configuration Register**

Address: 0x4003001C, Reset: 0x00, Name: ADCCFG

A write to the ADCCFG register does not reset the ADC.

If the overrange or comparator interrupts are set, the interrupt can be disabled by one of the following methods:

- ▶ Clearing the interrupt mask in ADCSTA
- ▶ Disabling comparator
- ▶ Reconfiguring the ADC

The comparator must be disabled for at least one full conversion period to ensure that the comparator interrupt is reset. Also, the interrupt mask in ADC0THEX (Register ADCMSKI, Bit 4) must be cleared to prevent unwanted interrupts during this period.

The result counter does not produce an interrupt of its own, but only gates the ADCxRDY interrupts.

If the result counter and the always interrupt mode are both active, the ADC operation is undefined.

**Table 88. ADCCFG Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
7	SWEN	Switch enable. 0: switch from GND_SW pin to AGND is open circuit. 1: switch from GND_SW pin to AGND is closed. This switch is not open circuit automatically when the ADC is placed in power-down mode.	
6	Reserved	Reserved. This bit must be set to 0.	

**ADC****Table 88. ADCCFG Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
5	ADC0ACCEN	ADC0 accumulator enable. 0: accumulator not active, resets accumulator to 0. 1: accumulator active. A negative reading decrements the accumulator. The accumulator can overflow if allowed to run for more than 65,535 conversions.	
[4:3]	ADC0CMPEN	ADC0 comparator enable. 00: comparator not active. 01: comparator active. Interrupt if $ I  > \text{ADC0TH}$ . The comparator samples at $f_{\text{ADC}}$ , that is, at the ADC output speed. 10: comparator + counter. Interrupt if $ I  > \text{ADC0TH}$ for number of conversions stored in ADC0THC. A value of $ I  < \text{threshold current } (I_{\text{TH}})$ resets the ADC0THCNT counter to 0, if the interrupt is low. 11: comparator + counter. Interrupt if $ I  > \text{ADC0TH}$ for number of conversions stored in ADC0THC. A value of $ I  < I_{\text{TH}}$ decrements the counter with a floor of 0, if the interrupt is low.	SM106
2	ADC0OREN	ADC overrange enable 0: disable this function. 1: enables a coarse overrange comparator on the current channel. If the current reading is significantly above positive full scale or below negative full scale for the active PGA setting, the overrange flag (ADC0OVR) in Register ADCSTA, Bit 3 is set. The signal must be outside the full-scale range for 125 $\mu\text{s}$ for this to occur. The ADC conversion is not interrupted if an overrange occurs.	SM106
1	Fasten	Fast conversion on internal temperature sensor. 0: disable fast conversion mode on the internal temperature sensor. 1: enable fast conversion mode on the internal temperature sensor. The ADC1 does not switch immediately to the temperature channel. Therefore, there is one more conversion on the channel programmed in ADC1CON, then the ADC switches at the optimum time to the internal temperature sensor to minimize latency. Only a single fast conversion is performed, that is, the ADC only reacts to a 0 to 1 transition on this bit, and, when the transition completes, the ADC reverts to the ADC1CON channel. This bit must be cleared when the fast conversion result is read in preparation for the next fast request. The fast conversion occurs at a fixed conversion speed (1 ms), and must only be used with certain combinations of SF and AF so that the fast result occurs simultaneous with the current channel result. This bit cannot be set before the ADC conversions start. This bit must be set after at least one ADC interrupt (this can be an unsettled interrupt if this mode is used).	SM110
0	ADCRcen	ADC result counter enable. 0: counter off and reset. ADC interrupts every $1 \div f_{\text{ADC}}$ . 1: counter on. ADC interrupts if ADC0RCV = ADC0RCL. Intermediate ADC conversions are lost if the result counter is active unless the accumulator is active.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**ADC0 Result Register**

Address: 0x40030020, Reset: 0x00000001, Name: ADC0DAT

Figure 18 shows the formatting of the 32-bit ADC0DAT register according to the gain setting selected.

Only the relevant data bits in the ADC0DAT register are set depending on the gain setting. This means that no software adjustment to the ADC0DAT result is required for different gain settings.

The data format of ADC0DAT is two's complement or unipolar, based on the ADC0CODE bits in the ADC0CON register.

The ADC0DAT register output equals a usable signal range from Bit 18 to Bit 3 at a gain of 512 and noise from Bit 2 to Bit 1.

Register ADC0DAT, Bit 0 indicates if valid data is available. If Register ADC0DAT, Bit 0 = 1, the data is invalid. If Register ADC0DAT, Bit 0 = 0, the data is valid.

## ADC

The ADC cannot write new data into the ADC0DAT register if the ADC0RDY bit is set. This condition does not apply if the core is off. When the core is off, the ADC0DAT register contains the most recent ADC data.

The data registers are written simultaneously if all ADCs are active, and the ADC0RDY bit is set when the ADC0DAT MMR is written.

Changing the configuration of ADC1 in the middle of a conversion resets ADC1 and does not affect ADC0. ADC0 continues to convert and the data is written into the ADC0DAT register.

If the ADC0RDY bit is low, there is no guarantee that the ADC0DAT MMRs are stable if read.

If the ADC0 result counter is active, the data register (ADC0DAT) is not updated until the ADC0RDY bit is set, that is, when the ADC0RCV counter reaches the programmed limit (ADC0RCL). This condition does not apply if the core is off. If the core is off, the ADC0DAT MMR contains the most recent ADC result(s) when the core wakes up.

GAIN = 1	SIGN	27	DATA	9	0	V
GAIN = 2	SIGN	26	DATA	8	0	V
GAIN = 4	SIGN	25	DATA	7	0	V
GAIN = 8	SIGN	24	DATA	6	0	V
GAIN = 16	SIGN	23	DATA	5	0	V
GAIN = 32	SIGN	22	DATA	4	0	V
GAIN = 64	SIGN	21	DATA	3	0	V
GAIN = 128	SIGN	20	DATA	2	0	V
GAIN = 256	SIGN	19	DATA	1	0	V
GAIN = 512	SIGN	18	DATA	1	0	V

018

Figure 18. ADC Output (Gain = 1 to Gain = 512)

Table 89. ADC0DAT Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[31:1]	Result	ADC0 conversion result.	
0	Valid	0: data is valid. 1: data is not valid.  This bit must be deasserted (= 0) in functional safety relevant applications.	SM106

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## ADC1 Result Register

Address: 0x40030024, Reset: 0x00000001, Name: ADC1DAT

The ADC1DAT register has a fixed data width because there is no gain control on the voltage channel or temperature channel.

The data format of ADC1DAT is twos complement or unipolar, based on the ADC1CODE bits in the ADC1CON registers.

Register ADC1DAT, Bit 0 indicates if valid data is available. If Register ADC1DAT, Bit 0 = 1, the data is invalid. If Register ADC1DAT, Bit 0 = 0, the data is valid.

The ADC cannot write new data into the ADC1DAT register if the relevant ADC1RDY bits are set. This condition does not apply if the core is off. When the core is off, the ADC1DAT register contains the most recent ADC data.

The data registers are written simultaneously if all ADCs are active and the ADCxRDY bits are set when the ADCxDAT MMRs are written.

Changing the configuration of ADC1 in the middle of a conversion resets ADC1. The ADC1DAT register does not update until fully settled output data is available.

If the ADC1RDY bit is low, there is no guarantee that the ADC1DAT MMR is stable if read.

Table 90. ADC1DAT Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[31:1]	Result	ADC1 conversion result.	

**ADC****Table 90. ADC1DAT Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
0	Valid	0: data is valid. 1: data is not valid.  This bit must be deasserted (= 0) in functional safety relevant applications.	SM98

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**ADC0 Offset Calibration Register**

Address: 0x40030030, Reset: calibration value, Name: ADC0OF

If performing a manual offset calibration with an external shorted input, the Register ADC0DAT, Bits[31:0] result can be transferred to the ADC0OF register using the following formula:

$$ADC0OF = (ADC0DAT \div 2^5) \times PGAGN \times (0x4000 \div ADC0GN) \quad (12)$$

**Table 91. ADC0OF Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[23:0]	ADC0OF	ADC0 24-bit offset calibration coefficient for all ADC0 input channels. Bit 23 is a sign bit. In offset calibration mode, the result of the calibration is stored in Register ADC0DAT, Bits[23:0]. The user must transfer the result to Register ADC0OF, Bits[23:0]. The Analog Devices calibrated value of this field must be used when executing safety measures.	SM100, SM101, SM102, SM106, SM107

**ADC1 Offset Calibration Register**

Address: 0x40030034, Reset: calibration value, Name: ADC1OF

If performing a manual offset calibration, the Register ADC1DAT, Bits[31:0] result can be transferred to the ADC1OF register using the following formula:

$$ADC1OF = (ADC1DAT \div 2^5) \times (0x4000 \div ADC1GN)$$

**Table 92. ADC1OF Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[23:0]	ADC1OF	ADC1 24-bit offset calibration coefficient for the VBAT/AGND and VINP_AUX/VINM_AUX channels. Bit 23 is a sign bit. In offset calibration mode, the result of the calibration is stored in Register ADC1DAT, Bits[23:0]. The user must transfer the result to Register ADC1OF, Bits[23:0]. The Analog Devices calibrated value of this field must be used when executing safety measures.	SM90, SM91, SM92, SM96, SM98

**ADC2 Offset Calibration Register**

Address: 0x40030038, Reset: calibration value, Name: ADC2OF

If performing a manual offset calibration, the Register ADC1DAT, Bits[31:0] result can be transferred to the ADC2OF register using the following formula:

$$ADC2OF = (ADC1DAT \div 2^5) \times (0x4000 \div ADC2GN) \quad (13)$$

**Table 93. ADC2OF Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[23:0]	ADC2OF	ADC2 24-bit offset calibration coefficient for the VTEMP/GND_SW pin channel, V <sub>BE</sub> 1/V <sub>BE</sub> 2 channel, and V <sub>BE</sub> /GND channel. Bit 23 is a sign bit. In offset calibration mode, the result of the calibration is stored in Register ADC1DAT, Bits[23:0]. The user must transfer the result to Register ADC2OF, Bits[23:0]. The Analog Devices calibrated value of this field must be used when executing safety measures.	SM110, SM111

**ADC****ADC0 Gain Calibration Register**

Address: 0x4003003C, Reset: calibration value, Name: ADC0GN

**Table 94. ADC0GN Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	ADC0GN	ADC0 16-bit gain calibration coefficient for all ADC0 input channels. In gain calibration mode, the result of the calibration is stored in Register ADC0DAT, Bits[15:0]. The user must transfer the result to Register ADC0GN, Bits[15:0]. The Analog Devices calibrated value of this field must be used when executing safety measures.	SM100, SM101, SM102, SM106, SM107

**ADC1 Gain Calibration Register**

Address: 0x40030040, Reset: calibration value, Name: ADC1GN

**Table 95. ADC1GN Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	ADC1GN	ADC1 16-bit gain calibration coefficient for the VBAT/AGND channel and VINP_AUX/VINM_AUX channel. In gain calibration mode, the result of the calibration is stored in Register ADC1DAT, Bits[15:0]. The user must transfer the result to Register ADC1GN, Bits[15:0]. The Analog Devices calibrated value of this field must be used when executing safety measures.	SM90, SM91, SM92, SM96, SM98

**ADC2 Gain Calibration Register**

Address: 0x40030044, Reset: calibration value, Name: ADC2GN

**Table 96. ADC2GN Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	ADC2GN	ADC2 16-bit gain calibration coefficient for the VTEMP/GND_SW pin channel, V <sub>BE</sub> 1/V <sub>BE</sub> 2 channel, and V <sub>BE</sub> /GND channel. In gain calibration mode, the result of the calibration is stored in Register ADC1DAT, Bits[15:0]. The user must transfer the result to Register ADC2GN, Bits[15:0]. The Analog Devices calibrated value of this field must be used when executing safety measures.	SM110, SM111

**SM91 Gain Calibration Coefficient Register**

Address: 0x000207E2, Reset: calibration value, Name: SM91GN

Location of the gain calibration coefficient value required for SM91.

**Table 97. SM91GN Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	SM91GN	Calibration coefficient value for SM91.	SM91

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**ADC0 Result Counter Limit Register**

Address: 0x40030048, Reset: 0x0001, Name: ADC0RCL

**Table 98. ADC0RCL Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	ADC0RCL	ADC result counter limit register. This register sets the number of conversions required before an ADC interrupt is generated. This feature must be enabled via the ADCCFG MMR (Register ADCCFG, Bit 0). The current channel comparator and the current channel accumulator are always active at f <sub>ADC</sub> .	SM64

**ADC****ADC0 Result Counter Value Register**

Address: 0x4003004C, Reset: 0x0000, Name: ADC0RCV

**Table 99.** ADC0RCV Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	ADCRCV	ADC result counter value register. This register holds the current number of completed conversions. This value can be used in conjunction with the accumulator to calculate the average current measured.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**ADC0 Comparator Threshold Register**

Address: 0x40030050, Reset: 0x00000000, Name: ADC0TH

**Table 100.** ADC0TH Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement
[31:0]	ADC0TH	ADC 32-bit ADC0 comparator threshold register. The absolute value is used by the comparator.	SM106

**ADC0 Threshold Counter Limit Register**

0x40030054, Reset: 0x01, Name: ADC0THC

**Table 101.** ADC0THC Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement
[7:0]	ADC0THC	ADC threshold counter limit. This register determines how many ADC readings above ADC0TH must occur before the ADC0THEX bit is set (Register ADCSTA, Bit 4), causing an interrupt.	SM106

**ADC0 Threshold Counter Value Register**

Address: 0x40030058, Reset: 0x00, Name: ADC0THV

**Table 102.** ADC0THV Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement
[7:0]	ADC0THV	ADC threshold counter. This register contains the current value of the number of times the threshold (ADC0TH) is exceeded.	SM106

**ADC0 Accumulator Register**

Address: 0x4003005C, Reset: 0x00000000, Name: ADC0ACC

The ADC0ACC register is read only and returns the value of the accumulator. The ADC0ACC register updates not more than two ADC clocks earlier than the ADC0DAT register.

There is no warning if the accumulator overflows. The ADC0RCL register can be used to reset the ADC0ACC register after a suitable number of samples. The number of samples is dependent on the gain range selected. For example, at gain = 32, 256 samples can be accumulated.

The accumulator is a signed twos complement or unipolar register, depending on the setting of the ADC0CODE bit.

The accumulator is reset by disabling the accumulator in Register ADCCFG, Bit 5, or by reconfiguring the ADC. If the user is using the ADCCFG register, the enable must be low for at least one full conversion period to ensure that the accumulator is reset. The interrupt mask in Register ADCMSKI, Bit 5 must also be cleared to prevent unwanted interrupts.

## ADC

Table 103. ADC0ACC Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement
[31:0]	ADC0ACC	ADC accumulator. This register holds the accumulated conversion result in the same format as ADC0DAT.	SM106

### ADC0 Accumulator Threshold Register

Address: 0x40030060, Reset: 0x00000000, Name: ADC0ATH

Table 104. ADC0ATH Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement
[31:0]	ADC0ATH	ADC0 accumulator threshold. The result is in the same format as ADC0DAT.	SM106

## TIMERS

The ADuCM330WFS/ADuCM331WFS have three timers, as follows:

- ▶ Timer 0, general-purpose timer
- ▶ Timer 2, wake-up timer
- ▶ Timer 3, watchdog timer


Timer 0 is a general-purpose, 32-bit, up or down counter with a programmable prescaler. Timer 0 is clocked directly by the PCLK.

Timer 2 is a 32-bit, up or down counter with a programmable prescaler. Timer 2 is clocked directly by the internal 32.768 kHz low frequency oscillator, UCLK, PCLK, or an external clock on P0.4 (ECLKIN).

Timer 3 is a 16-bit, down counter with a programmable prescaler. Timer 3 is clocked by the internal 32.768 kHz low frequency oscillator. The watchdog timer (Timer 3) is used to recover from an illegal software state.


## TIMER SYNCHRONIZATION

The synchronization block diagram (seen in [Figure 19](#)) shows the interface between user timer MMRs and the core timer blocks. User code can access all timer MMRs directly, including TxVAL, TxCON, and TxCLRI. Data must then transfer from these MMRs to the core timers (Timer 0, Timer 2, and Timer 3) within the timer subsystem. These core timers are buffered from the user MMR interface by the synchronization (SYNC) block. The principle of the synchronization block is to provide a method that ensures data and other required control signals can cross asynchronous clock domains correctly. An example of asynchronous clock domains is the ARM Cortex-M3 processor running on a 16.384 MHz clock, and the wake-up timer (Timer 2) running on the low frequency oscillator of 32.768 kHz.

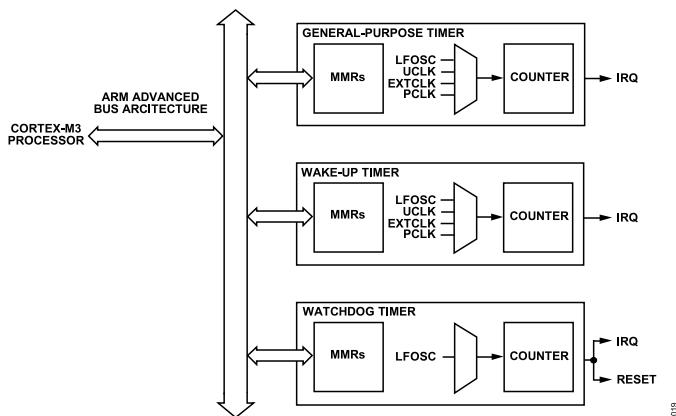

*Figure 19. Timer Synchronization Block Diagram*

As shown in [Figure 19](#), the MMR logic and core timer logic reside in separate and asynchronous clock domains. Any data coming from the MMR core clock domain and being passed to the internal timer domain must be synchronized to the internal timer clock domain to ensure that it is latched correctly into the core timer clock domain. This synchronization is achieved by using two flip flops, as shown in [Figure 20](#), to not only synchronize, but also to double buffer the data and therefore ensure data integrity in the timer clock domain.

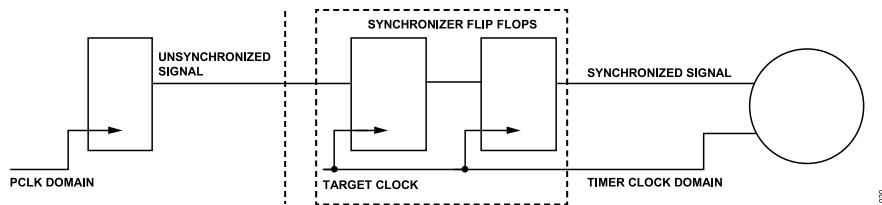

*Figure 20. Synchronizer for Signals Crossing Clock Domains*


Because of the synchronization block, although timer control data is latched almost immediately (with the fast core clock) in the MMR clock domain, this data in turn cannot reach the core timer logic for at least two periods of the selected internal timer domain clock. It is recommended to wait for three periods of the timer domain clock for critical operations, such as putting the core to sleep.

## TIMERS

### GENERAL-PURPOSE TIMER

#### General-Purpose Timer (Timer 0) Features

The ADuCM330WFS/ADuCM331WFS feature one general-purpose timer (Timer 0), a 32-bit, count up or count down timer with a programmable prescaler and three timeout fields (A, B, and C), as shown in [Figure 21](#).

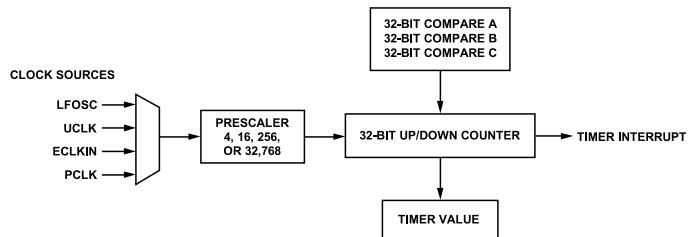

*Figure 21. General-Purpose Timers Block Diagram*

#### General-Purpose Timer Overview

The general-purpose timer operates in either a free running or periodic mode. In free running mode, the counter decrements or increments from the maximum or minimum value until the counter reaches zero scale or full scale and starts again at the maximum or minimum value. In periodic mode, the counter decrements or increments until the counter matches the programmed timeout time in the Timeout Field C. This value is stored in the T0TOFC0 register and the T0TOFC1 register. After this value is reached, the timer restarts and counts to the value defined in Field C. Two additional timeout fields are available (Field A and Field B). These fields can be used to set additional timeout cases within the timeout period defined by Field C. A general-purpose timer interrupt (see [Table 4](#)) can be enabled for the timeout of any or all of the timeout fields. The value of a counter can be read at any time by accessing the value registers of the counter (T0VALx).

The general-purpose timer (Timer 0) is a 32-bit, up or down counter with a maximum value of 0xFFFFFFFF and a programmable prescaler. The prescaler source is selectable, allowing the clock to be divided by a factor of 4, 16, 256, or 32,768. Timer 0 can be clocked directly by the internal 32.768 kHz low frequency oscillator, UCLK, PCLK, or ECLKIN.

#### General-Purpose Timer Operation

The general-purpose timer is started by writing 1 to the timer enable bit (Register T0EN, Bit 0), and can be stopped at any time by writing a zero to the same bit. The timer is 32 bits and can be read at any time. In incrementing mode, the timer increments from zero until the counter reaches full scale or the counter matches the programmed timeout value set in Timeout Field C. When the timer reaches the timeout value, a general-purpose timer interrupt (see [Table 4](#)) is generated and the timer is reset to zero if interrupts are enabled. In decrement mode, the counter starts at full scale and counts down to the value set in Timeout Field C, and if configured, generates an interrupt on timeout.

Timer 0 has 32 bits but resides on a 16-bit bus. Therefore, two bus reads are required to obtain the full 32 bits. There are separate addresses for the upper (T0VAL1) 16 bits and lower (T0VAL0) 16 bits of Timer 0. When the freeze control bit (Register T0CON, Bit 3) is enabled, the upper 16 bits are latched and held in a separate register after the lower 16 bits are read. Holding the upper 16 bits in a separate register after the lower 16 bits are read ensures that the counter value can be read in full at a specific time. Both T0VALx registers (upper and lower) remain frozen until the upper 16 bits are read.

Any timer interrupt can be cleared by writing a 1 to the correct clear bit in the T0CLRI register. In the free running mode only, if the counter rolls over, a general-purpose timer interrupt is generated, if enabled.

#### General-Purpose Timer Configuration

Take care when configuring the general-purpose timer registers to ensure correct operation. The registers can be configured only when the timer is disabled.

On initial startup, all configuration registers must be configured before enabling the timer.

To reconfigure the timer, use the following steps:

1. Set T0EN = 0x0.
2. Wait until Register T0ISTA, Bit 8 = 0. Wait until the enable register is synchronized to the timer clock domain.

**TIMERS**

3. Write to the register(s) that is or are being reconfigured.

4. Set T0EN = 0x1.

**General-Purpose Timer 0 Memory Mapped Registers****Table 105. General-Purpose Timer 0 Memory Mapped Registers (Base Address 0x40000000)**

Offset	Name	Description	Access	Reset
0x0000	T0VAL0	General-purpose timer current count value (LSB) register	Read	0x0000
0x0004	T0VAL1	General-purpose timer current count value (MSB) register	Read	0x0000
0x0008	T0CON	General-purpose timer control register	Read/write	0x0040
0x000C	T0EN	General-purpose timer enable register	Read/write	0x0000
0x0010	T0TOFA0	General-purpose timer Timeout Field A (LSB) register	Read/write	0x1FFF
0x0014	T0TOFA1	General-purpose timer Timeout Field A (MSB) register	Read/write	0x0000
0x0018	T0TOFB0	General-purpose timer Timeout Field B (LSB) register	Read/write	0x2FFF
0x001C	T0TOFB1	General-purpose timer Timeout Field B (MSB) register	Read/write	0x0000
0x0020	T0TOFC0	General-purpose timer Timeout Field C (LSB) register	Read/write	0x3FFF
0x0024	T0TOFC1	General-purpose timer Timeout Field C (MSB) register	Read/write	0x0000
0x0028	T0IEN	General-purpose timer interrupt enable register	Read/write	0x0000
0x002C	T0ISTA	General-purpose timer interrupt status register	Read	0x0000
0x0030	T0CLRI	General-purpose timer clear interrupts register	Write	0x0000

**General-Purpose Timer Current Count Value (LSB and MSB) Registers**

Address: 0x40000000, Reset: 0x0000, Name: T0VAL0

Address: 0x40000004, Reset: 0x0000, Name: T0VAL1

**Table 106. T0VAL0 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	Value	Current Timer 0 count value, Bit 15 to Bit 0 (LSB)	SM60

**Table 107. T0VAL1 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	Value	Current Timer 0 count value, Bit 31 to Bit 16 (MSB)	SM60

**General-Purpose Timer Control Register**

Address: 0x40000008, Reset: 0x0040, Name: T0CON

**Table 108. T0CON Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:7]	Reserved	Reserved. These bits must be set to 0.	
[6:5]	CLKSEL	Clock select. 00: PCLK. 01: 32.768 kHz low frequency oscillator. 10: UCLK. 11: ECLKIN (external clock P0.4).	SM60
4	FREE_RUN	Timer free run enable. 0: periodic mode. In increment mode, the timer counts up to T0TOFC0 and T0TOFC1 and returns to 0 and starts again. In decrement mode, the timer counts from 0xFFFFFFFF to T0TOFC0 and T0TOFC1 and starts again at 0xFFFFFFFF. 1: free running mode. In increment mode, the timer counts from 0 to 0xFFFFFFFF and starts again at 0. In decrement mode, the timer counts from 0xFFFFFFFF to 0 and starts again at 0xFFFFFFFF.	SM60
3	Freeze	Freeze enable bit. 0: disable this feature (default).	

**TIMERS****Table 108. T0CON Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		1: enable the freezing of the upper 16 bits (T0VAL1) of the counter after the lower 16 bits are read from T0VAL0. This process of enabling the freezing of the upper 16 bits ensures that the software reads an atomic shot of the timer. T0VAL1 unfreezes after T0VAL1 is read.	
2	INC_DEC	Increment or decrement mode. 0: timer starts at zero and starts incrementing. 1: timer starts at full scale and starts decrementing.	SM60
[1:0]	PRE	Prescaler. 00: source clock ÷ 4 (default). 01: source clock ÷ 16. 10: source clock ÷ 256. 11: source clock ÷ 32,768.	SM60

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**General-Purpose Timer Enable Register**

Address: 0x4000000C, Reset: 0x0000, Name: T0EN

**Table 109. T0EN Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:1] 0	Reserved T0EN	Reserved. These bits must be set to 0.  Timer enable bit. 0: disable the timer. Timer is in a reset state. 1: enable the timer.  This bit must be low when configuring the control register or the TOTOF0 register or TOTOF1 register in periodic mode. Bit 8 of the status register must also be 0 before programming the control register (or TOTOF0 or TOTOF1 in periodic mode).	SM60

**General-Purpose Timer Timeout Field A (LSB and MSB) Registers**

Address: 0x40000010, Reset: 0x1FFF, Name: T0TOFA0

Address: 0x40000014, Reset: 0x0000, Name: T0TOFA1

These registers can be written to at any time. However, the corresponding interrupt enable, Bit 0 of the T0IEN register, must be disabled. After these registers are updated, the interrupt can be re-enabled.

**Table 110. T0TOFA0 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	Value	Lower 16 bits of Timeout Field A.	SM60

**Table 111. T0TOFA1 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	Value	Upper 16 bits of Timeout Field A.	SM60

**General-Purpose Timer Timeout Field B (LSB and MSB) Registers**

Address: 0x40000018, Reset: 0x2FFF, Name: T0TOFB0

Address: 0x4000001C, Reset: 0x0000, Name: T0TOFB1

These registers can be written to at any time. However, the corresponding interrupt enable, Bit 1 of the T0IEN register, must be disabled. After the register is updated, the interrupt can be re-enabled.

## TIMERS

**Table 112. T0TOFB0 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	Value	Lower 16 bits of Timeout Field B.	SM60

**Table 113. T0TOFB1 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	Value	Upper 16 bits of Timeout Field B.	SM60

### General-Purpose Timer Timeout Field C (LSB and MSB) Registers

Address: 0x40000020, Reset: 0x3FFF, Name: T0TOFC0

Address: 0x40000024, Reset: 0x0000, Name: T0TOFC1

If the T0VAL register is not free running, it resets after reaching the value of these registers.

For periodic mode, these registers can only be written to when the timer is disabled. In free running mode, these registers can be written to while the timer is running. Before writing to this register, the corresponding interrupt enable, Bit 2 of the T0IEN register, must be disabled. After these registers are updated, the interrupt can be re-enabled.

**Table 114. T0TOFC0 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[1:0]	Value	Lower 16 bits of Timeout Field C.	SM60

**Table 115. T0TOFC1 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	Value	Upper 16 bits of Timeout Field C.	SM60

### General-Purpose Timer Interrupt Enable Register

Address: 0x40000028, Reset: 0x0000, Name: T0IEN

The interrupt enable also acts as an enable for the Timeout Match A, Timeout Match B, and Timeout Match C. If the enable bit is not set, the corresponding status bit is also not set. The corresponding comparison does not occur if the enable bit is not enabled.

**Table 116. T0IEN Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:4]	Reserved	Reserved. These bits must be set to 0.	
3	Roll	Rollover interrupt enable. Used only in free running mode. 0: disable the rollover interrupt (default). 1: generate an interrupt when the general-purpose timer rolls over.	
2	TOFC	T0TOFC interrupt enable. 0: disable T0TOFC interrupt (default). 1: generate an interrupt when T0VAL reaches T0TOFC.	
1	TOFB	T0TOFB interrupt enable. 0: disable T0TOFB interrupt (default). 1: generate an interrupt when T0VAL reaches T0TOFB.	
0	TOFA	T0TOFA interrupt enable. 0: disable T0TOFA interrupt (default). 1: generate an interrupt when T0VAL reaches T0TOFA.	

<sup>1</sup> The blank rows in this column mean that the configuration of the vector table position(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the vector table position(s) and develop additional fault detection and control mechanisms as necessary.

### General-Purpose Timer Interrupt Status Register

Address: 0x4000002C, Reset: 0x0000, Name: T0ISTA

**TIMERS****Table 117. T0ISTA Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:9]	Reserved	Reserved.	
8	EN_SYNC	Indicates when a change in the enable bit is synchronized to the 32.768 kHz clock domain. 0: cleared automatically when the change in the enable bit has been synchronized to the 32.768 kHz clock domain. 1: set automatically when the enable bit in the T0EN register is set or cleared.	
7	Freeze	Timer value freeze. Register T0CON, Bit 3 enables the freeze functionality. 0: cleared automatically when T0VAL1 is not frozen. 1: set automatically to indicate that the value in T0VAL1 is frozen.	
[6:4]	Reserved	Reserved.	
3	Roll	Rollover interrupt flag. Used only in free running mode. 0: cleared automatically after a write to T0CLRI. 1: set automatically to indicate a rollover interrupt has occurred (the T0VAL counter register is all 1s for increment mode and all 0s for decrement mode) and Register T0IEN, Bit 3 is enabled.	
2	TOFC	T0TOFC interrupt flag. 0: cleared automatically after a write to T0CLRI. 1: set automatically to indicate a comparator interrupt has occurred and Register T0IEN, Bit 2 is enabled.	
1	TOFB	T0TOFB interrupt flag. 0: cleared automatically after a write to T0CLRI. 1: set automatically to indicate a comparator interrupt has occurred and Register T0IEN, Bit 1 is enabled.	
0	TOFA	T0TOFA interrupt flag. 0: cleared automatically after a write to T0CLRI. 1: set automatically to indicate a comparator interrupt has occurred and Register T0IEN, Bit 0 is enabled.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**General-Purpose Timer Clear Interrupt Register**

Address: 0x40000030, Reset: 0x0000, Name: T0CLRI

Ensure that the register write has fully completed before returning from the interrupt handler. Use the data synchronization barrier (DSB) instruction if necessary.

**Table 118. T0CLRI Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:4]	Reserved	Reserved. These bits must be set to 0.	
3	Roll	Rollover interrupt clear bit. Used only in free running mode. 0: cleared automatically after synchronization. 1: clear a rollover interrupt flag.	
2	TOFC	T0TOFC interrupt flag. 0: cleared automatically after synchronization. 1: clear a T0TOFC interrupt flag.	
1	TOFB	T0TOFB interrupt flag. 0: cleared automatically after synchronization. 1: clear a T0TOFB interrupt flag.	
0	TOFA	T0TOFA interrupt flag. 0: cleared automatically after synchronization.	

## TIMERS

**Table 118. T0CLRI Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		1: clear a T0TOFA interrupt flag.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## WAKE-UP TIMER

### Wake-Up Timer (Timer 2) Features

The wake-up timer (Timer 2) is a 32-bit, up or down counter with a maximum value of 0xFFFFFFFF and a programmable prescaler. The prescaler source is selectable, allowing the clock to be divided by a factor of 1 (or 4, clock source dependent), 16, 256, or 32,768. Timer 2 can be clocked directly by the internal 32.768 kHz low frequency oscillator, UCLK, PCLK, or an ECLKIN.

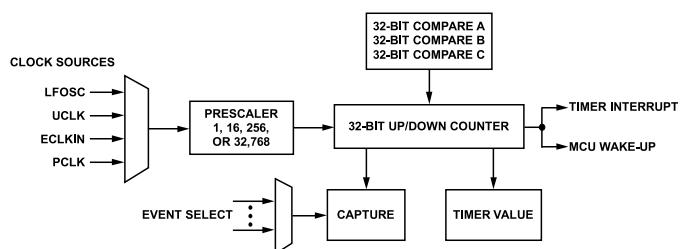


Figure 22. Wake-Up Timer Block Diagram

### Wake-Up Timer Overview

Timer 2 can be either free running or periodic. In free running mode, the counter decrements or increments from the maximum or minimum value until the counter is zero scale or full scale and then starts again at the maximum or minimum value. In periodic mode, the counter decrements or increments from the value in the wake-up field registers (T2WUFCx MMRs) until the counter is zero scale or full scale and starts again at the value stored in the load register. There are three time field values that can be compared with the counter (Field A, Field B, and Field C). The value of a counter can be read at any time by accessing the value register of the counter (T2VALx).

### Wake-Up Timer Operation

The wake-up timer (Timer 2) is initiated by setting Bit 0 of the timer enable register to 1 (Register T2EN, Bit 0).

In free running increment mode, the timer increments from zero until the counter reaches full scale. In periodic mode, the counter counts up to the programmed wake-up time in Field C. In decrement mode, the timer starts at full scale and counts down to zero or to the value in Field C. If interrupts are enabled, the counter generates a wake-up timer interrupt (see [Table 4](#)) when the counter reaches the target value or the counter rolls over (0xFFFFFFFF to 0x00000000 or vice versa).

Because Timer 2 is 32 bits but resides on a 16-bit bus, two bus reads are required to obtain the 32 bits. There are separate addresses for the upper (T2VAL1) and lower (T2VAL0) 16 bits of Timer 2. When the lower 16 bits are addressed and read, the upper 16 bits are latched and held in a separate register to be read later. Both T2VALx registers (upper and lower) remain frozen until the upper 16 bits are read. The freeze bit (Register T2CON, Bit 3) must be set to freeze the T2VALx registers between lower and upper reads.

Any timer interrupt can be cleared by writing a 1 to the correct clear bit in the T2CLRI register. In the free running mode only, if the counter rolls over, a wake-up timer interrupt is generated, if enabled.

### Timer 2 Configuration

Take care when configuring the wake-up timer registers to ensure correct operation of the timer. The registers can only be configured when the timer is disabled.

On initial startup, all configuration registers must be configured before enabling the timer.

To reconfigure the timer, use the following steps:

## TIMERS

1. Set T2EN = 0x0.
2. Wait until Register T2ISTA, Bit 8 = 0. Wait until the enable register is synchronized to the timer clock domain.
3. Write to the register(s) that is or are being reconfigured.
4. Set T2EN = 0x1.

### Wake-Up Feature

The wake-up feature is enabled from register programming that selects up to three specific time fields to compare with the corresponding wake-up timer counter. The user is responsible for writing the code to wake up the device. The timer is responsible only for the generation of the wake-up interrupt.

### T2WUFA to T2WUFC

After one of these three time fields (T2WUFAx to T2WUFCx) matches the Timer 2 counter, a wake-up event or interrupt can be generated. The top time field (T2WUFC0 and T2WUFC1) value has priority. If the FREE\_RUN control bit is cleared, Timer 2 is reset to zero after reaching this wake-up time (or set to full scale if in decrementing mode). The timer continues to increment or decrement, and the wake-up is periodic without software programming. If the FREE\_RUN bit is set, wake-up events can be generated, but reprogramming the wake-up time field is required after one or all three time fields are reached (unless full timer length wake-up is desired) because of the timer not being reset after each wake-up event. The interrupt enable bits for these three time values also act as wake-up pulse enable bits. If the time value of a register needs to be changed, after a wake-up occurs, the interrupt enable bit for it must first be disabled because the match logic is in the 32.768 kHz time domain. The disabling of the interrupt bit ensures that another match cannot occur. After the new value is loaded into the time field register, the interrupt can be enabled again.

### Wake-Up Timer Memory Mapped Registers

*Table 119. Wake-Up Timer Memory Mapped Registers (Base Address 0x40002500)*

Offset	Name	Description	Access	Reset
0x0000	T2VAL0	Wake-up timer current count value (LSB) register	Read	0x0000
0x0004	T2VAL1	Wake-up timer current count value (MSB) register	Read	0x0000
0x0008	T2CON	Wake-up timer control register	Read/write	0x0010
0x000C	T2EN	Wake-up timer enable register	Read/write	0x0000
0x0010	T2WUFA0	Wake-up timer Wake-Up Field A (LSB) register	Read/write	0x1FFF
0x0014	T2WUFA1	Wake-up timer Wake-Up Field A (MSB) register	Read/write	0x0000
0x0018	T2WUFB0	Wake-up timer Wake-Up Field B (LSB) register	Read/write	0x2FFF
0x001C	T2WUFB1	Wake-up timer Wake-Up Field B (MSB) register	Read/write	0x0000
0x0020	T2WUFC0	Wake-up timer Wake-Up Field C (LSB) register	Read/write	0x3FFF
0x0024	T2WUFC1	Wake-up timer Wake-Up Field C (MSB) register	Read/write	0x0000
0x0028	T2IEN	Wake-up timer interrupt enable register	Read/write	0x0000
0x002C	T2ISTA	Wake-up timer interrupt status register	Read	0x0000
0x0030	T2CLRI	Wake-up timer clear interrupts register	Write	0x0000
0x003C	T2CAP0	Wake-up timer capture event count (LSB) register	Read	0x0000
0x0040	T2CAP1	Wake-up timer capture event count (MSB) register	Read	0x0000

### Wake-Up Timer Current Count (LSB and MSB) Value Registers

Address: 0x40002500, Reset: 0x0000, Name: T2VAL0

Address: 0x40002504, Reset: 0x0000, Name: T2VAL1

*Table 120. T2VAL0 Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement
[15:0]	Value	Current Timer 2 count value, Bit 15 to Bit 0 (LSB)	SM60, SM64

**TIMERS****Table 121. T2VAL1 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	Value	Current Timer 2 count value, Bit 31 to Bit 16 (MSB)	SM60, SM64

**Wake-Up Timer Control Register**

Address: 0x40002508, Reset: 0x0010, Name: T2CON

**Table 122. T2CON Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:12]	Reserved	Reserved. These bits must be set to 0.	
[11:8]	EVENT_SEL	Event select. Select one of the events for event capture. 0000: External Interrupt 0 (P0.3). 0001: External Interrupt 1 (P0.4). 0010: watchdog timer interrupt. 0011: general-purpose timer interrupt. 0100: ADC interrupt. 0101: flash interrupt. 0110: SPI interrupt. 0111: LIN0 interrupt. 1000: LIN1 interrupt. 1001: LIN2 interrupt. 1010: high voltage interrupt. 1011: low frequency oscillator calibration interrupt. 1100: SRAM ECC interrupt. 1101: not used. 1110: not used. 1111: not used.	SM60, SM64
7	EVENT_ENABLE	Event capture enable. 0: disable the event capture logic. 1: enable the event capture logic.	SM60, SM64
[6:5]	CLKSEL	Clock select. 00: PCLK. 01: 32.768 kHz low frequency oscillator. 10: UCLK. 11: ECLKIN.	SM60, SM64
4	FREE_RUN	Timer free running enable. 0: periodic mode. In increment mode, the timer counts to T2WUFC0/T2WUFC1 and returns to 0 and starts again. In decrement mode, the timer counts from 0xFFFFFFFF to T2WUFC0/T2WUFC1 and starts again at 0xFFFFFFFF. 1: free running mode. In increment mode, the timer counts from 0 to 0xFFFFFFFF and starts again at 0. In decrement mode, the timer counts from 0xFFFFFFFF to 0 and starts again at 0xFFFFFFFF.	SM60, SM64
3	Freeze	Freeze enable bit. 0: cleared by user to disable this feature (default). 1: enable the freezing of the upper 16 bits (T2VAL1) of the counter after the lower bits are read from the T2VAL0 register. This process of enabling the freezing of the upper 16 bits ensures that the software reads an atomic shot of the timer. The T2VAL1 register unfreezes after the T2VAL1 register is read.	
2	INC_DEC	Increment or decrement mode. 0: timer starts at zero and starts incrementing. 1: timer starts at full scale and starts decrementing.	SM60, SM64
[1:0]	PRE	Prescaler.	SM60, SM64

**TIMERS****Table 122. T2CON Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		00: source clock $\div$ 1. If the selected clock source is UCLK or PCLK, this setting results in a prescaler of 4. 01: source clock $\div$ 16. 10: source clock $\div$ 256. 11: source clock $\div$ 32,768.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**Wake-Up Timer Enable Register**

Address: 0x4000250C, Reset: 0x0000, Name: T2EN

**Table 123. T2EN Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:1]	Reserved	Reserved. These bits must be set to 0.	
0	T2EN	Timer enable bit. 0: disable the timer. Timer is in a reset state. 1: enable the timer.  This bit must be low when configuring the control register or the T2WUFC0/T2WUFC1 register in periodic mode. Bit 8 of the status register must also be 0 before programming the control register (or T2WUFC0/T2WUFC1 in periodic mode).	SM60, SM64

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**Wake-Up Timer Wake-Up Field A (LSB and MSB) Registers**

Address: 0x40002510, Reset: 0xFFFF, Name: T2WUFA0

Address: 0x40002514, Reset: 0x0000, Name: T2WUFA1

The T2WUFAx registers can be written to at any time. However, the corresponding interrupt enable, Bit 0 of the T2IEN register, must be disabled. After these registers are updated, the interrupt can be re-enabled.

**Table 124. T2WUFA0 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	T2WUFA0	Lower 16 bits of Wake-Up Field A.	SM60, SM64

**Table 125. T2WUFA1 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	T2WUFA1	Upper 16 bits of Wake-Up Field A.	SM60, SM64

**Wake-Up Timer Wake-Up Field B (LSB and MSB) Registers**

Address: 0x40002518, Reset: 0xFFFF, Name: T2WUFB0

Address: 0x4000251C, Reset: 0x0000, Name: T2WUFB1

The T2WUFBx registers can be written to at any time, but the corresponding interrupt enable, Bit 1 of T2IEN register, must be disabled. After these registers are updated, the interrupt can be re-enabled.

**Table 126. T2WUFB0 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	T2WUFB0	Lower 16 bits of Wake-Up Field B.	SM60, SM64

## TIMERS

**Table 127. T2WUFB1 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	T2WUFB1	Upper 16 bits of Wake-Up Field B.	SM60, SM64

### Wake-Up Timer Wake-Up Field C (LSB and MSB) Registers

Address: 0x40002520, Reset: 0x3FFF, Name: T2WUFC0

Address: 0x40002524, Reset: 0x0000, Name: T2WUFC1

If the T2VAL register is not free running, the T2VAL register resets after reaching the value of the T2WUFCx registers.

For periodic mode, these registers can only be written to when the timer is disabled. In free running mode, these registers can be written to while the timer is running. Before writing to these registers, the corresponding interrupt enable, Bit 2 of the T2IEN register, must be disabled. After these registers are updated, the interrupt can be re-enabled.

**Table 128. T2WUFC0 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	T2WUFC0	Lower 16 bits of Wake-Up Field C.	SM60, SM64

**Table 129. T2WUFC1 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	T2WUFC1	Upper 16 bits of Wake-Up Field C.	SM60, SM64

### Wake-Up Timer Interrupt Enable Register

Address: 0x40002528, Reset: 0x0000, Name: T2IEN

The interrupt enable also acts as an enable for the Wake-Up Match A, Wake-Up Match B, and Wake-Up Match C. If the enable bit is not set, the corresponding status bit cannot be set. The corresponding comparison does not occur if the enable bit is not enabled.

**Table 130. T2IEN Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:4]	Reserved	Reserved. These bits must be set to 0.	
3	Roll	Rollover interrupt enable. Used only in free running mode. 0: disable the roll over interrupt (default). 1: generate an interrupt when the wake-up timer rolls over.	SM60, SM64
2	WUFC	T2WUFCx interrupt enable. 0: disable T2WUFCx interrupt (default). 1: generate an interrupt when T2VALx reaches T2WUFCx.	SM60, SM64
1	WUFB	T2WUFbx interrupt enable. 0: disable T2WUFbx interrupt (default). 1: generate an interrupt when T2VALx reaches T2WUFbx.	SM60, SM64
0	WUFA	T2WUFAx interrupt enable. 0: disable T2WUFAx interrupt (default). 1: generate an interrupt when T2VALx reaches T2WUFAx.	SM60, SM64

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### Wake-Up Timer Interrupt Status Register

Address: 0x4000252C, Reset: 0x0000, Name: T2ISTA

**TIMERS****Table 131.** T2ISTA Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:9]	Reserved	Reserved.	
8	EN_SYNC	Indicates when a change in the timer enable bit is synchronized to the 32.768 kHz clock domain. 0: cleared automatically when the change in the enable bit is synchronized to the 32.768 kHz clock domain. 1: set automatically when the enable bit in the T2EN register is set or cleared.	
7	Freeze	Timer value freeze. Register T2CON, Bit 3 enables the freeze functionality. 0: cleared automatically when the T2VAL1 register is not frozen. 1: set automatically to indicate that the value in the T2VAL1 register is frozen.	
6	Wake-up status	Status of the wake-up signal to the power-down control circuit. These signals are outputs from the timer and wake the core up on a wake-up event and are active high. 0: power-down of the timer can occur immediately. 1: power-down is delayed until all signals are cleared.	
5	Reserved	Reserved.	
4	Capture	Capture event flag. Indicates when a capture event is pending. 0: cleared automatically when the T2CAP1 register is read. 1: set automatically when a rising edge is detected on the selected event line.	
3	Roll	Rollover interrupt flag. Used only in free running mode. 0: cleared automatically after a write to T2CLRI. 1: set automatically to indicate a rollover interrupt has occurred, that is, the T2VALx counter registers are all 1s for increment mode and all 0s for decrement mode.	
2	WUFC	T2WUFC interrupt flag. 0: cleared automatically after a write to T2CLRI. 1: set automatically to indicate a comparator interrupt has occurred and Register T2IEN, Bit 2 is enabled.	
1	WUFB	T2WUFB interrupt flag. 0: cleared automatically after a write to T2CLRI. 1: set automatically to indicate a comparator interrupt has occurred and Register T2IEN, Bit 1 is enabled.	
0	WUFA	T2WUFA interrupt flag. 0: cleared automatically after a write to T2CLRI. 1: set automatically to indicate a comparator interrupt has occurred and Register T2IEN, Bit 0 is enabled.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**Wake-Up Timer Clear Interrupts Register**

Address: 0x40002530, Reset: 0x0000, Name: T2CLRI

Ensure that the register write has fully completed before returning from the interrupt handler. Use the data synchronization barrier (DSB) instruction if necessary.

**Table 132.** T2CLRI Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:5]	Reserved	Reserved. These bits must be set to 0.	
4	CAPTURE_CLR	Interrupt clear bit for the capture event interrupt.	
3	Roll	Rollover interrupt clear bit. This bit is used only in free running mode. 0: cleared automatically after synchronization. 1: clear a rollover interrupt flag.	
2	WUFC	T2WUFC interrupt flag. 0: cleared automatically after synchronization. 1: clear a T2WUFC interrupt flag.	

## TIMERS

**Table 132. T2CLR1 Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
1	WUFB	T2WUFB interrupt flag. 0: cleared automatically after synchronization. 1: clear a T2WUFB interrupt flag.	
0	WUFA	T2WUFA interrupt flag. 0: cleared automatically after synchronization. 1: clear a T2WUFA interrupt flag.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## Wake-Up Timer Capture Event Count (LSB and MSB) Registers

Address: 0x4000253C, Reset: 0x0000, Name: T2CAP0

Address: 0x40002540, Reset: 0x0000, Name: T2CAP1

**Table 133. T2CAP0 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	Value	Lower 16 bits of the count at which the selected event occurred	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**Table 134. T2CAP1 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	Value	Upper 16 bits of the count at which the selected event occurred	


<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

The wake-up event capture logic does not work if the device is put into system halt mode or hibernate mode. The device must be kept in active mode while capturing an event.

## WATCHDOG TIMER

### Watchdog Timer (Timer 3) Features

The watchdog timer (Timer 3) is a 16-bit, down counter with programmable prescaler.

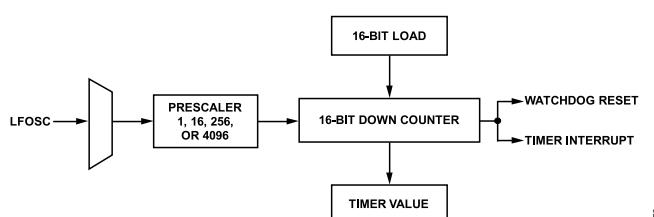

**Figure 23. Watchdog Timer Block Diagram**

## Watchdog Timer Overview

The watchdog timer (Timer 3) is a 16-bit, down counter with a programmable prescaler. The prescaler source is selectable and can be scaled by factors of 1, 16, 256, or 4096.

Timer 3 is used to recover from an illegal software state. After being enabled by the user code, Timer 3 requires periodic servicing to prevent it from forcing a reset or an interrupt of the processor.

Timer 3 is clocked by the internal 32.768 kHz low frequency oscillator. Timer 3 is clocked at all times except during reset.

## TIMERS

Timer 3 is active in kernel download mode.

A Timer 3 timeout generates a reset or an IRQ. Register T3CON, Bit 1 is added to allow selection of an IRQ instead of a reset, which can be used for debug purposes. The IRQ can be cleared by writing 0xCCCC to the T3CLR1 write only register.

### Watchdog Timer Operation

After a POR, the watchdog timer is initialized by the kernel as follows:

$$T3LD = 0x0400$$

This initialization enables the watchdog timer with a timeout of 8 sec. This initial configuration can be modified by the following user code:

$$\text{Timeout} = \text{PRESCALER} \times (T3LD + 1)/32.768 \text{ kHz} \quad (14)$$

However, setting Register T3CON, Bit 5 protects the T3CON register and the T3LD register. After kernel execution, user code can disable the timer once, then reconfigure the timer with Register T3CON, Bit 5 set, only once. After this, only a power cycle can unlock the T3CON and T3LD registers and allow reconfiguration of the timer again. If Register T3CON, Bit 5 is not set by user code, user code can change the T3LD register and the other bits of the T3CON register at any time. If Register T3CON, Bit 5 is cleared, the timer is disabled. The settings can be modified and the timer re-enabled.

If the watchdog timer is set to fixed mode (Register T3CON, Bit 6 = 0), the watchdog timer value decrements from 0x1000 to zero, wraps around to 0x1000, and continues to decrement. To achieve a timeout value greater or less than 0x1000 (typically 32 sec with default prescaler = 256), periodic mode must be used (Register T3CON, Bit 6 = 1), and T3LD and Register T3CON, Bits[3:2] (prescaler) be written with the values corresponding to the desired timeout period. The maximum timeout is ~8192 sec (T3LD = 0xFFFF, prescaler = 4096).

When the watchdog timer decrements to zero, a reset (or IRQ) is generated. This reset can be prevented by writing the T3CLR1 register with 0xCCCC before the expiration period. A write to the T3CLR1 register causes the watchdog timer to reload with T3LD (or 0x1000 if in fixed mode) immediately to begin a new timeout period and start to count again. If any value other than 0xCCCC is written, a reset is generated (or IRQ if selected by Register T3CON, Bit 1).

### Watchdog Timer Power-Down Mode

If Register T3CON, Bit 0 is cleared to 0, the watchdog timer continues to count while the ARM Cortex-M3 processor is halted. If Register T3CON, Bit 0 is set to 1, the watchdog timer is held at its current count while the ARM Cortex-M3 processor is halted and continues from its previous value after the ARM Cortex-M3 processor restarts again. This bit must be configured at the same time as Register T3CON, Bit 5.

### Watchdog Timer Configuration

Take care when configuring the watchdog timer registers to ensure correct operation of the timer.

#### Disabling the Watchdog Timer

If Register T3CON, Bit 5 is reset on the initial T3CON write, the timer is reset and disabled.

#### Re-Enabling the Watchdog Timer

If Register T3CON, Bit 5 is set in a subsequent T3CON write, the watchdog timer is reset and reloaded or restarted. Depending on the state of Register T3CON, Bit 6, the watchdog timer restarts from 0x1000 (Register T3CON, Bit 6, MOD = 0) or restarts from T3LD (Register T3CON, Bit 6, MOD = 1).

#### Writing to the T3LD Register

If the T3LD register is written when MOD = 1, the watchdog timer receives the T3LD value and starts counting from there.

#### Write to T3CLR1 to Restart the Watchdog Timer

The user writes 0xCCCC to T3CLR1 within the timeout period to restart the watchdog timer normally and prevent a reset or an IRQ. The user has to ensure that at least four low power oscillator clock cycles have lapsed between T3CLR1 writes.

**TIMERS****Watchdog Timer Prescaled Decrement**

The enabled watchdog timer decrements when the clock divided by prescaler is reached. If the watchdog timer decrements after reaching the minimum value of 0x0000, the watchdog timer is reloaded with either 0x1000 or the T3LD value, depending on the MOD bit. Reaching the minimum value of 0x0000 is a watchdog timeout event. A reset or IRQ is generated, depending on the IRQ bit (Register T3STA, Bit 0).

**WATCHDOG TIMER MEMORY MAPPED REGISTERS****Table 135.** Watchdog Timer Memory Mapped Registers (Base Address 0x40002580)

Offset	Name	Description	Access	Reset
0x0000	T3LD	Watchdog timer load value register	Read/write	0x0400
0x0004	T3VAL	Watchdog timer current count value register	Read	0x1000
0x0008	T3CON	Watchdog timer control register	Read/write	0x00E9
0x000C	T3CLRI	Watchdog timer clear interrupt register	Write	0x0000
0x0018	T3STA	Watchdog timer status register	Read	0x0020

**Watchdog Timer Load Value Register**

Address: 0x40002580, Reset: 0x0400, Name: T3LD

**Table 136.** T3LD Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement
[15:0]	Value	Load value.	SM41

**Watchdog Timer Current Count Value Register**

Address: 0x40002584, Reset: 0x1000, Name: T3VAL

**Table 137.** T3VAL Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement
[15:0]	Value	Current count value. Read only register.	SM41

**Watchdog Timer Control Register**

Address: 0x40002588, Reset: 0x00E9, Name: T3CON

**Table 138.** T3CON Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:8]	Reserved	Reserved. These bits must be set to 0.	
7	Reserved	Reserved. These bits must be set to 1.	
6	MOD	Timer mode. 0: fixed mode. 1: periodic mode (default). In fixed mode, the timer wraps around at 0x1000.	SM41
5	Enable	Timer enable. 0: disable the timer. The timer enable bit can only be cleared once. 1: enable the timer (default).	SM41
4	Reserved	Reserved. This bit must be set to 0.	
[3:2]	PRE	Prescaler. 00: (32768 ÷ 1) Hz. T3LD must be set greater than 0x2. 01: (32768 ÷ 16) Hz. 10: (32768 ÷ 256) Hz (default). 11: (32768 ÷ 4096) Hz.	SM41
1	IRQ	Timer interrupt.	SM41

## TIMERS

**Table 138. T3CON Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		0: generate a reset on a timeout (default). This bit must be set to 0 in functional safety relevant applications. 1: generate an interrupt on a timeout.	
0	PD	Power-down off. 0: enable Timer 3 to continue counting when the ARM Cortex-M3 processor is halted. 1: halt Timer 3 when the ARM Cortex-M3 processor is powered down using system halt mode or hibernate mode in the PWRMOD MMR.	SM41

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## Watchdog Timer Clear Interrupt Register

Address: 0x4000258C, Reset: 0x0000, Name: T3CLRI

Ensure that the register write has fully completed before returning from the interrupt handler. Use the DSB instruction if necessary.

**Table 139. T3CLRI Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	Value	Clear watchdog. The user writes 0xCCCC to reset, reload, or restart Timer 3, or clear IRQ. A write of any other value causes a watchdog reset or IRQ. This register is write only and reads back 0.	SM41

There must be a minimum of 125 µs between consecutive writes to this register to allow the clear command to be correctly detected in the LFOSC clock domain and to avoid stalling the timer.

## Watchdog Timer Status Register

Address: 0x40002598, Reset: 0x0020, Name: T3STA

The T3STA register is a read only status register. Because of the asynchronous relationship and frequency difference between the core clock and Timer 3 clock, changes to the watchdog timer configuration are synchronized between the two clock domains. Several of the status bits are used to signal to the core that Timer 3 clock synchronization is in progress. The user can use these bits to verify that the previous timer configuration write has taken effect in the Timer 3 clock domain if necessary.

The status bits typically only need to be used if the watchdog timer is disabled on the initial write to the T3CON register, followed by Timer 3 configuration changes, followed by an immediate re-enable of Timer 3. To ensure that all changes are in effect, do not perform the re-enable until all in progress status bits are cleared.

**Table 140. T3STA Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:5]	Reserved	Reserved.	
4	Lock	Lock status bit. 0: cleared by default until user code sets Bit 5 in the T3CON register. 1: set automatically in hardware if register T3CON, Bit 5 has been set by user code.	SM41
3	CON_SYNC	T3CON write synchronization. 0: T3CON register write synchronization match. 1: T3CON register write synchronization in progress.	
2	LD_SYNC	T3LD write synchronization. 0: T3LD register write synchronization match. 1: T3LD register write synchronization in progress.	
1	CLRI_SYNC	T3CLRI write synchronization. 0: T3CLRI write synchronization not complete or inactive.	

**TIMERS****Table 140. T3STA Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		1: T3CLRI write being synchronized to Timer 3 clock domain. Timer 3 is restarted (if 0xFFFF was written) when synchronization is complete.	
0	IRQ	Timer 3 IRQ. 0: Timer 3 interrupt not pending. 1: Timer 3 interrupt pending.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## GENERAL-PURPOSE DIGITAL INPUTS AND OUTPUTS

### GENERAL-PURPOSE DIGITAL INPUTS AND OUTPUTS OVERVIEW

The ADuCM330WFS/ADuCM331WFS feature six bidirectional, GPIO pins. All of the GPIO pins have multiple functions, configurable by user code. These features are described in [Table 141](#).

Each GPIO pin can be configured as an input, output, or open circuit. These pins also have an internal, pull-up, programmable resistor. See the ADuCM330WFS/ADuCM331WFS data sheet for logic input voltages and absolute maximum values. For optimum low power operation, the GPIOs must be configured as inputs (using GP0OEN) and with pull-up resistors enabled (using GP0PUL).


When the ADuCM330WFS/ADuCM331WFS enter a power saving mode, the GPIO pins retain their state.

GPIOs must not be used for functional safety relevant applications.

### GENERAL-PURPOSE DIGITAL INPUTS AND OUTPUTS FEATURES

The general-purpose digital inputs and outputs features include the following:

- ▶ Six, bidirectional, GPIO pins.
- ▶ Internally multiplexed with SPI and LIN blocks.

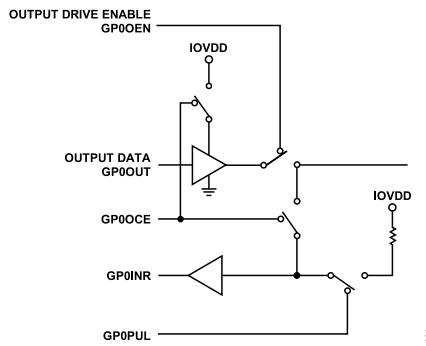

*Figure 24. GPIO Block Diagram*

### GENERAL-PURPOSE DIGITAL PORT MULTIPLEX

This block provides control over the GPIO functionality of specified pins, because some of the pins can work as GPIOs or have other specific functions. The following table details the configuration modes available for each GPIO that can be selected in the GP0CON register.

*Table 141. GPIO Multiplex*

GPIO	Configuration Mode: 00	Configuration Mode: 01	Configuration Mode: 10	Configuration Mode: 11
P0.0	GPIO0	CS	Not applicable	LIN_RX (in)
P0.1	GPIO1	SCLK	Not applicable	LIN_TX (out)
P0.2	GPIO2	MISO	Not applicable	Not applicable
P0.3	GPIO3/IRQ0	MOSI	LC_TX (in)	LIN_TX (out)
P0.4	GPIO4/IRQ1	LC_RX (out)	ECLKIN	LIN_RX (in)
P0.5	GPIO5	LC_TX (out)	Not applicable	LIN_TX (out)

### GENERAL-PURPOSE DIGITAL INPUT AND OUTPUT OPERATION

#### Digital Port Multiplexed Configuration

The pin functions are configured using the GP0CON register. The GP0CON register configures Port 0. External interrupts and input level signals (GP0IN) are available in any of the configuration modes, except when the GPIOs are configured as open circuit or as outputs (GP0OEN = 1 and GP0OCE = 1).

## GENERAL-PURPOSE DIGITAL INPUTS AND OUTPUTS

### GPIO Pull-Up Enable

All GPIO pins have a switchable internal pull-up resistor. Using the GP0PUL register, it is possible to enable or disable pull-up resistors on the pins when they are configured as inputs. The pull-up resistors are automatically disabled when the pin is set as an output or when open circuit is enabled.

### GPIO Data In

When configured as an input (by default), the GPIO input states are available in GP0IN.

### Open Circuit Enable

If a pin is set as an output, setting the pin to open circuit disables the input paths. Open circuit is enabled by setting the corresponding bit on the GP0OCE register to Logic 1. External interrupts are not available when open circuit is enabled.

### GPIO Data Out

When the GPIOs are configured as outputs, the values in GP0OUT are reflected on the GPIOs.

### Bit Set

Bit set is used to set one or more GPIO data outputs without affecting others within a port. Only the GPIO corresponding with the write data bit equal to one is set. The remaining GPIOs are unaffected.

### Bit Clear

Bit clear is used to clear one or more GPIO data outputs without affecting others within a port. Only the GPIO corresponding with the write data bit equal to one is cleared. The remaining GPIOs are unaffected.

### Bit Toggle

Bit toggle is used to toggle one or more GPIO data outputs without affecting others within a port. Only the GPIO corresponding with the write data bit equal to one is toggled. The remaining GPIOs are unaffected.

### GPIO Data Output Enable

The data output path is enabled. The values in GP0OUT are reflected on the GPIOs.

### GPIO MEMORY MAPPED REGISTERS

*Table 142. GPIO Interface Port 0 Memory Mapped Registers (Base Address 0x40006000)*

Offset	Name	Description	Access	Reset
0x0000	GP0CON	GPIO configuration register	Read/write	0x0000
0x0004	GP0EN	GPIO output enable register	Read/write	0x00
0x0008	GP0PUL	GPIO output pull-up enable register	Read/write	0x3F
0x000C	GP0OCE	GPIO open circuit enable register	Read/write	0x00
0x0014	GP0INR	GPIO input data register	Read	0xFF
0x0018	GP0OUT	GPIO data output register	Read/write	0x00
0x001C	GP0SET	GPIO data output set register	Write	0x00
0x0020	GP0CLR	GPIO data output clear register	Write	0x00
0x0024	GP0TGL	GPIO pin toggle register	Write	0x00

### GPIO Configuration Register

Address: 0x40006000, Reset: 0x0000, Name: GP0CON

For more information, see [Table 141](#).

## GENERAL-PURPOSE DIGITAL INPUTS AND OUTPUTS

**Table 143. GP0CON Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:12]	Reserved	Reserved. These bits must be set to 0.	
[11:10]	CON5	Configuration mode bits for P0.5.	SM240
[9:8]	CON4	Configuration mode bits for P0.4.	SM240
[7:6]	CON3	Configuration mode bits for P0.3.	SM240
[5:4]	CON2	Configuration mode bits for P0.2.	SM240
[3:2]	CON1	Configuration mode bits for P0.1.	SM240
[1:0]	CON0	Configuration mode bits for P0.0.	SM240

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### GPIO Output Enable Register

Address: 0x40006004, Reset: 0x00, Name: GP0EN

**Table 144. GP0EN Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:6]	Reserved	Reserved. These bits must be set to 0.	
[5:0]	GP0EN	Input or output enable. 0: enables the corresponding GPIO on Port 0 as an input. 1: enables the corresponding GPIO on Port 0 as an output.	SM240

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### GPIO Output Pull-Up Enable Register

Address: 0x40006008, Reset: 0x3F, Name: GP0PUL

**Table 145. GP0PUL Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:6]	Reserved	Reserved. These bits must be set to 0.	
[5:0]	GP0PUL	Pull-up resistor enable. 0: disables the internal pull-up resistor on the corresponding GPIO on Port 0. 1: enables the internal pull-up resistor on the corresponding GPIO on Port 0.	SM240

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### GPIO Open Circuit Enable Register

Address: 0x4000600C, Reset: 0x00, Name: GP0OCE

**Table 146. GP0OCE Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:6]	Reserved	Reserved. These bits must be set to 0.	
[5:0]	GP0OCE	Open circuit enable. Sets the GPIO pads on Port 0 to open drain mode.	SM240

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### GPIO Input Data Register

Address: 0x40006014, Reset: 0XX, Name: GP0INR

## GENERAL-PURPOSE DIGITAL INPUTS AND OUTPUTS

Contents of the GP0INR register depends on the digital level on the corresponding pins.

*Table 147. GP0INR Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:6]	Reserved	Reserved.	
[5:0]	GP0IN	When read, reflects the level (for example, 0 or 1) on the GPIO pins on Port 0 except when configured in open circuit.	SM240

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## GPIO Data Output Register

Address: 0x40006018, Reset: 0x00, Name: GP0OUT

*Table 148. GP0OUT Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:6]	Reserved	Reserved. These bits must be set to 0.	
[5:0]	GP0OUT	Data output bits. 0: cleared by user to drive the corresponding GPIO low. 1: set by user code to drive the corresponding GPIO high.  Reads back the value on GPIO outputs. For example, writing GP0OUT = 0x12 drives 1 on P0.1 and P0.4, and the remaining GPIO are low, assuming these pins are configured as outputs.	SM240

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## GPIO Data Output Set Register

Address: 0x4000601C, Reset: 0x00, Name: GP0SET

*Table 149. GP0SET Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:6]	Reserved	Reserved. These bits must be set to 0.	
[5:0]	GP0SET	Data output set bits. 0: no action. 1: set by user code to drive the corresponding GPIO high.	SM240

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## GPIO Data Output Clear Register

Address: 0x40006020, Reset: 0x00, Name: GP0CLR

*Table 150. GP0CLR Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:6]	Reserved	Reserved. These bits must be set to 0.	
[5:0]	GP0CLR	Data output clear bits. 0: cleared by user code. Has no effect.	SM240

## GENERAL-PURPOSE DIGITAL INPUTS AND OUTPUTS

**Table 150.** GP0CLR Register Bit Descriptions (Continued)

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		1: set by user code to drive the corresponding GPIO low.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## GPIO Pin Toggle Register

Address: 0x40006024, Reset: 0x00, Name: GP0TGL

**Table 151.** GP0TGL Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:6]	Reserved	Reserved. These bits must be set to 0.	
[5:0]	GP0TGL	Data output toggle bits. 0: cleared by user code. Clearing a bit has no effect on the corresponding state of the GPIO. 1: set by user code to invert the corresponding GPIO. Automatically cleared after input is toggled.	SM240

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## SERIAL PERIPHERAL INTERFACE

### SPI FEATURES

The standard SPI include the following features:

- ▶ Serial clock phase mode (CPHA)
- ▶ Serial clock polarity mode (CPOL)
- ▶ LSB first transfer option
- ▶ Loopback mode
- ▶ Master or slave mode
- ▶ Transfer and interrupt mode
- ▶ Continuous transfer mode
- ▶ Transmit and receive first in, first out (FIFO)
- ▶ Interrupt mode, interrupt after one byte, two bytes, three bytes, or four bytes
- ▶ Receive overflow mode and transmit underrun mode
- ▶ Open circuit data output mode
- ▶ Full duplex communications supported

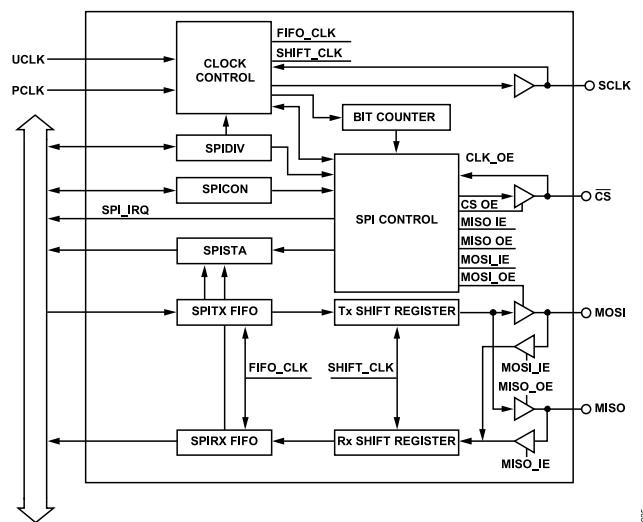


Figure 25. SPI Block Diagram

### SPI OVERVIEW

The ADuCM330WFS/ADuCM331WFS integrate an SPI. The SPI is an industry-standard, synchronous serial interface that allows eight bits of data to be synchronously transmitted and simultaneously received, or full duplex. The SPI implemented on the ADuCM330WFS/ADuCM331WFS can operate at a maximum bit rate of 8 Mbps in both master mode and slave mode.

The SPI is provided as a functional external interface on the ADuCM330WFS/ADuCM331WFS. However, the SPI is not considered an interface for use in functional safety relevant applications and no safety measures are provided or suggested.

### SPI OPERATION

The SPI port can be configured for master or slave operation and consists of four pins: master in, slave out (MISO), master out, slave in (MOSI), serial clock input/output (SCLK), and chip select ( $\overline{CS}$ ). In an SPI system, the master device generates a serial clock and asserts the chip select for the appropriate slave device.  $\overline{CS}$  frames the transfer. Data is simultaneously transmitted from the master to the slave using the MOSI pin and transmitted from the slave to the master using the MISO pin. In normal master operation, the MOSI pin is an output and the MISO pin is an input. In normal slave operation, the MOSI pin is an input and the MISO pin is an output.

The GPIOs used for SPI communication must be configured in SPI mode before enabling the SPI peripheral, and the internal pull-up resistors on the SPI pins must be disabled via the GP0PUL register when using the SPI. To enable the SPI peripheral in slave mode, the  $\overline{CS}$  pin must be monitored to ensure that communication is inactive first.

## SERIAL PERIPHERAL INTERFACE

### MISO Pin

The MISO pin is configured as an input line in master mode and as an output line in slave mode. The MISO line on the master (data in) must be connected to the MISO line in the slave device (data out). The data is transferred as byte wide (8-bit) serial data.

### MOSI Pin

The MOSI pin is configured as an output line in master mode and as an input line in slave mode. The MOSI line on the master (data out) must be connected to the MOSI line in the slave device (data in). The data is transferred as byte wide (8-bit) serial data.

### SCLK Pin

The SCLK pin synchronizes the data being transmitted and received through the MOSI SCLK period. Therefore, a byte is transmitted and received after eight SCLK periods. The SCLK pin is configured as an output in master mode and as an input in slave mode.

In master mode, the SPICON register controls the polarity and phase of the clock, and the bit rate is defined in the SPIDIV register as follows:

$$f_{SERIALCLOCK} = f_{UCLK} \div (2 \times (1 + SPIDIV, Bits[5:0]))$$

The maximum data rate is 8 Mbps when using the hardware FIFO provided in the interface.

In slave mode, the SPICON register must be configured with the phase and polarity of the expected input clock. The slave accepts data from an external master up to 8 Mbps.

In both master and slave mode, data is transmitted on one edge of the SCLK signal and sampled on the other. Therefore, it is important that the polarity and phase be configured the same for the master and slave devices.

### CS Pin

In SPI slave mode, a transfer is initiated by the assertion of  $\overline{CS}$ , which is an active low input signal. The SPI port then transmits and receives 8-bit data until the transfer is concluded by deassertion of  $\overline{CS}$ . In slave mode, CS is always an input.

In SPI master mode,  $\overline{CS}$  is an active low output signal.  $\overline{CS}$  asserts itself automatically at the beginning of a transfer and deasserts itself upon completion.

## SPI TRANSFER INITIATION

In master mode, the SPI transfer and interrupt mode bit in the SPICON register, Bit 6, determines how an SPI serial transfer is initiated. If the mode bits (MOD) are set in the SPICON register, a serial transfer is initiated after a write to the transmit FIFO occurs. If the mode bit is cleared, a serial transfer is initiated after a read of the receive FIFO occurs. The read must be performed while the SPI interface is idle. A read performed during an active transfer cannot initiate another transfer. For any setting of Bit 1 and Bit 6 of the SPICON register, the SPI simultaneously receives and transmits data. Therefore, during data transmission, the SPI also receives data and fills up the receive FIFO. If the data is not read from the receive FIFO, the overflow interrupt occurs when the FIFO starts to overflow. If the user does not want to read the receive data or receive overflow interrupts, Bit 12 of the SPICON register can be set and the receive data cannot be saved to the receive FIFO. Similarly, when the user only wants to receive data and does not want to write data to the transmit FIFO, Bit 13 of the SPICON register can be set to avoid receiving underrun interrupts from the transmit FIFO.

### Transmit Initiated Transfer

For transfers initiated by a write to the transmit FIFO (SPITX), the SPI begins transmitting as soon as the first byte is written to the FIFO, irrespective of the configuration in Register SPICON, Bits[15:14]. The first byte is immediately read from the FIFO and written to the transmit shift register, and the transfer commences.

If the continuous transfer enable bit (Register SPICON, Bit 11) is set, the transfer continues until no valid data is available in the transmit FIFO. There is no stall period between transfers where  $\overline{CS}$  is deasserted.  $\overline{CS}$  is asserted and remains asserted for the duration of the transfer until the transmit FIFO is empty. The time the transfer ends does not depend on Register SPICON, Bits[15:14]. The transfer stops when there is no valid data left in the FIFO. Conversely, the transfer continues while there is valid data in the FIFO.

If the continuous transfer enable bit is cleared, each transfer consists of a single, 8-bit serial transfer. If valid data exists in the transmit FIFO, a new transfer is initiated after a stall period with  $\overline{CS}$  being deasserted.

## SERIAL PERIPHERAL INTERFACE


### Receive Initiated Transfer

Transfers initiated by a read of the receive FIFO (SPIRX) depend on the number of bytes to be received in the FIFO. If Register SPICON, Bits[15:14] are set to 3, and a read to the receive FIFO occurs, the SPI initiates a 4-byte transfer. If continuous mode is set, the four bytes occur continuously with no deassertion of CS between bytes. If continuous mode is not set, the four bytes occur with stall periods between transfers with the CS pin being deasserted.


If Register SPICON, Bits[15:14] are set to 0x2 and a read to the receive FIFO occurs, the SPI initiates a 3-byte transfer. If Register SPICON, Bits[15:14] are set to 0x1 and a read to the receive FIFO occurs, the SPI initiates a 2-byte transfer. If Register SPICON, Bits[15:14] are set to 0x0 and a read to the receive FIFO occurs, the SPI initiates a 1-byte transfer.

A read of the receive FIFO while the SPI is receiving data does not initiate another transfer after the present transfer is complete. In slave mode, a transfer is initiated by the assertion of CS. The device as a slave transmits and receives 8-bit data until the transfer is concluded by the deassertion of CS.

The SPI transfer protocol diagrams (see [Figure 26](#) and [Figure 27](#)) illustrate the data transfer protocol for the SPI and the effects of the CPHA (Register SPICON, Bit 2) bit and CPOL (Register SPICON, Bit 3) bit in the control register on that protocol.

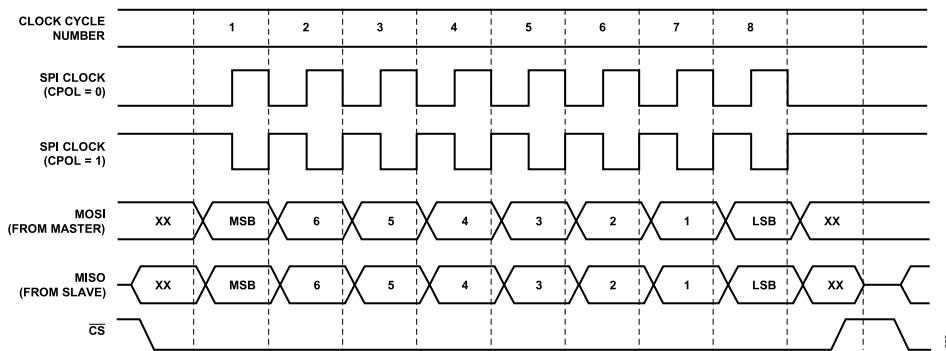

**Figure 26. SPI Transfer Protocol, CPHA = 0**

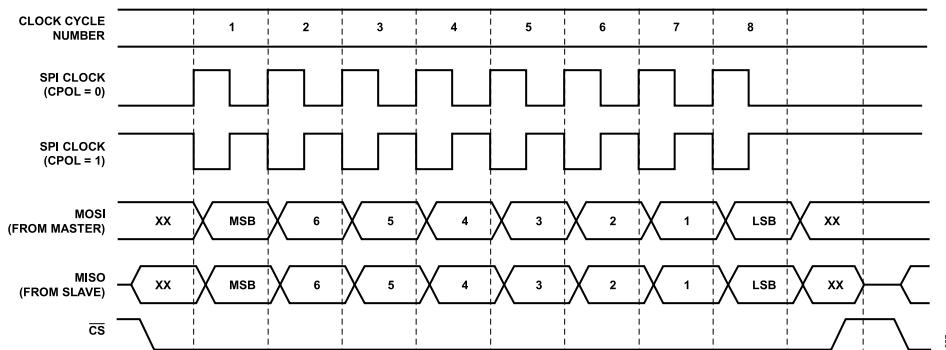

**Figure 27. SPI Transfer Protocol, CPHA = 1**

### SPI Data Underrun and Overflow

If the transmit underrun mode bit, zero transmit enable (ZEN) (Register SPICON, Bit 7), is cleared, the last byte from the previous transmission is shifted out when a transfer is initiated with no valid data in the FIFO. If ZEN is set, 0s are transmitted when a transfer is initiated with no valid data in the FIFO.

If the receive overflow overwrite enable bit, RXOF (Register SPICON, Bit 8), is set, the valid data in the receive FIFO is overwritten by the new serial byte received when there is no space left in the FIFO. If RXOF is cleared, the new serial byte received is discarded when there is no space left in the FIFO.

When valid data is being overwritten in the receive FIFO, the oldest byte is overwritten first, followed by the next oldest byte, and so on.

## SERIAL PERIPHERAL INTERFACE

### SPI INTERRUPTS

There are five sources of interrupts. Register SPISTA, Bit 0 reflects the state of the interrupt line. Register SPISTA, Bits[7:4] and Register SPISTA, Bit 12 reflect the state of the five sources. The SPI generates either a transmit IRQ or a receive IRQ. Both interrupts cannot be enabled at the same time. The appropriate interrupt is enabled using the TIM bit in the SPICON register. If TIM = 1, a transmit IRQ is enabled. If TIM = 0, a receive IRQ is enabled. In addition, the CSERR bit (Register SPISTA, Bit 12) is always generating an interrupt.

In master mode, interrupts are generated after the last SCLK edge for each byte transfer. In slave mode, interrupts are generated by either the first SCLK edge of the next byte transferred or by the deassertion of CS.

#### Transmit Interrupt

If the TIM bit (Register SPICON, Bit 6) is set, the transmit FIFO status causes the interrupt. Register SPICON, Bits[15:14] control when the interrupt occurs, as shown in [Table 152](#).

The interrupts are generated depending on the number of bytes transmitted and not on the number of bytes in the FIFO, unlike the receive interrupt, which depends on the number of bytes in the receive FIFO and not on the number of bytes received.

The transmit interrupt is cleared by a read to the status register. The status of this interrupt can be cleared by reading Register SPISTA, Bit 5. The interrupt is disabled if Register SPICON, Bit 13 is left high.

A write to the control register, SPICON, resets the transmitted byte counter back to zero. For example, when Register SPICON, Bits[15:14] are set to 0x3 and SPICON is written to after three bytes are transmitted, the transmit interrupt does not occur until another four bytes are transmitted.

**Table 152. Register SPICON, Bits[15:14] IRQ Mode Bits**

Bits[15:14]	Interrupt Condition
0x0	An interrupt is generated after each byte that is transmitted. The interrupt occurs when the byte is read from the FIFO and written to the shift register.
0x1	An interrupt is generated after every two bytes that are transmitted.
0x2	An interrupt occurs after every third byte that is transmitted.
0x3	An interrupt occurs after every fourth byte that is transmitted.

#### Receive Interrupt

If the TIM bit is cleared, the receive FIFO status causes the interrupt. Register SPICON, Bits[15:14] control when the interrupt occurs. The interrupt is cleared by a read of SPISTA. The status of this interrupt can be cleared by reading Register SPISTA, Bit 6.

Interrupts are generated only when data is written to the FIFO. For example, if Register SPICON, Bits[15:14] are set to 0x0, an interrupt is generated after the first byte is received. When the status register is read, the interrupt is deactivated. If the byte is not read from the FIFO, the interrupt cannot be regenerated. Another interrupt cannot be generated until another byte is received into the FIFO.

The interrupt depends on the number of valid bytes in the FIFO and not on the number of bytes received. For example, when Register SPICON, Bits[15:14] are set to 0x1, an interrupt is generated after a byte is received when there are two or more bytes in the FIFO. The interrupt is not generated after every two bytes received. The interrupt is disabled if Register SPICON, Bit 12 is left high.

#### Underrun and Overflow Interrupts

Register SPISTA, Bit 7 and Register SPISTA, Bit 4 also generate SPI interrupts. When a transfer starts with no data in the transmit FIFO, Register SPISTA, Bit 4 is set to indicate an underrun condition. This condition causes an interrupt. The interrupt (and status bit) are cleared on a read of the status register. This interrupt occurs irrespective of Register SPICON, Bits[15:14]. This interrupt is disabled if Register SPICON, Bit 13 is set. At the last edge of the SPICLK of the actual byte transferred, the next byte must be available in the transmit FIFO to be transferred into the transmit shift register.

When data is received and the receive FIFO is already full, Bit 8 of the status register goes high to indicate an overflow condition. This causes an interrupt. The interrupt (and status bit) are cleared on a read of the status register. This interrupt occurs irrespective of Register SPICON, Bits[15:14]. This interrupt is disabled if Register SPICON, Bit 12 is set.

All interrupts are cleared by a read of the status register or if Register SPICON, Bit 0 is deasserted. The receive interrupt and transmit interrupt are also cleared if the relevant flush bits are asserted. Otherwise, the interrupts stay active even if the SPI is reconfigured.

## SERIAL PERIPHERAL INTERFACE

### WIRE-OR'ED MODE (WOM)


To prevent contention when the SPI is used in a multimaster or multislave system, the MOSI and MISO data output pins can be configured to behave as open circuit drivers. An external pull-up resistor is required when this feature is selected. The WOM bit in the configuration register controls the pin enable outputs for the data lines. With WOM enabled in master mode, the output drive is enabled when a 0 is being transmitted on the MOSI pin, and the output driver is disabled when a 1 is being transmitted on the MOSI pin. The line is pulled up by the pull-up resistor.

Similarly, in slave mode and with WOM enabled, the output drive is enabled when a 0 is being transmitted on the MISO pin, and the output driver is disabled when a 1 is being transmitted on the MISO pin.

### CSERR CONDITION

The SPI bit counter (internal) (see [Figure 25](#)) is reset after the completion of eight clocks of SCLK. The CSERR bit (Register SPISTA, Bit 12) indicates if an erroneous deassertion of the  $\overline{CS}$  signal has been detected before the completion of all the eight SCLK cycles. This bit generates an interrupt. The bit counter stays at the value where it stopped and then continues from there when  $\overline{CS}$  is asserted afterward. This continuation of the bit counter may cause inconsistent data transfers. To avoid inconsistent data transfers, the CSERR detection circuit is available. The CSERR detection circuit checks for  $\overline{CS}$  deassertion when bit counter is not equal to 7 (reset value). If the condition is met, the circuit asserts a CSERR signal. If an interrupt occurs, generated by the CSERR bit (Register SPISTA, Bit 12), the SPI enable bit (Register SPICON, Bit 0) must be disabled and restarted to enable a clean recovery. This process ensures that subsequent transfers are error free. The BCRST bit (Register SPIDIV, Bit 7) must be set at all times in both slave mode and master mode, except when a midbyte stall in SPI communication is required. In this case, the CSERR flag is set, but can be ignored.

The SPI must only be re-enabled when the  $\overline{CS}$  signal is high.

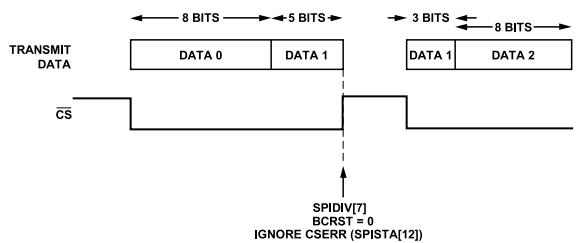

*Figure 28. Serial Peripheral Interface, Erroneous Deassertion of Chip Select Diagram*

### SPI AND POWER-DOWN MODES

In master mode, before entering hibernate mode or system halt mode, it is recommended to disable the SPI block in Register SPICON, Bit 0. In slave mode, the  $\overline{CS}$  line level must be checked via the GPIO registers to ensure that the SPI is not communicating, and the SPI block must be disabled while the  $\overline{CS}$  line is high. At power-up, the SPI block can be re-enabled. In slave mode, the SPI must be re-enabled only if the  $\overline{CS}$  line is high.

### SPI MEMORY MAPPED REGISTERS

*Table 153. SPI Peripheral Memory Address (Base Address 0x40004000)*

Offset	Name	Description	Access	Reset
0x0000	SPISTA	SPI status register	Read	0x0000
0x0004	SPIRX	SPI receive register	Read	0x0000
0x0008	SPITX	SPI transmit register	Write	0x0000
0x000C	SPIDIV	SPI baud rate selection register	Read/write	0x0000
0x0010	SPICON	SPI configuration register	Read/write	0x0000

### SPI Status Register

Address: 0x40004000, Reset: 0x0000, Name: SPISTA

*Table 154. SPISTA Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:13]	Reserved	Reserved.	

**SERIAL PERIPHERAL INTERFACE****Table 154. SPISTA Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
12	CSERR	Detected an abrupt CS deassertion. 0: cleared when the SPISTA register is read. 1: set when the line CS is deasserted abruptly, even before the full byte of data is transmitted completely. This bit causes an interrupt. If the CSERR bit is set, it is recommended to clear the enable bit in the SPICON register to ensure a clean recovery.	
11	RXS	SPI receive FIFO excess bytes present. Indicates when there are more bytes in the receive FIFO than the receive interrupt indicated. This bit depends on Register SPICON, Bit[15:14]. 00: RXS is set if there are two or more bytes in the receive FIFO. 01: RXS is set if there are three or more bytes in the receive FIFO. 10: RXS is set if there are four or more bytes in the receive FIFO. 11: RXS is not set. Cleared to 0 when the number of bytes in the FIFO is equal or less than the number of bytes in Register SPICON, Bits[15:14]. This bit is not cleared when the SPISTA register is read. This bit is not dependent on Register SPICON, Bit 6 and does not cause an interrupt.	
[10:8]	RXFSTA	SPI receive FIFO status bits. 000: FIFO is empty. 001: one valid byte in the FIFO. 010: two valid bytes in the FIFO. 011: three valid bytes in the FIFO. 100: four valid bytes in the FIFO.	
7	RXOF	SPI receive FIFO overflow status bit (interrupt). 0: cleared to 0 when the SPISTA register is read. 1: set to 1 when the receive FIFO is already full when new data is loaded to the FIFO. This bit generates an interrupt, except when the RFLUSH bit is set in the SPICON register.	
6	RX	SPI receive IRQ status bit. 0: cleared to 0 when the SPISTA register is read. 1: set to 1 when a receive interrupt occurs. This bit is set when the TIM bit in the SPICON register is cleared, and the required number of bytes are received.	
5	TX	SPI transmit IRQ status bit. 0: cleared to 0 when the SPISTA register is read. 1: set to 1 when a transmit interrupt occurs. This bit is set when the TIM bit in the SPICON register is set, and the required number of bytes are transmitted.	
4	TXUR	SPI transmit FIFO underrun (interrupt). 0: cleared to 0 when the SPISTA register is read. 1: set to 1 when a transmit is initiated without any valid data in the transmit FIFO. This bit generates an interrupt, except when the TFLUSH bit is set in the SPICON register.	
[3:1]	TXFSTA	Indicates how many valid bytes are in the SPI transmit FIFO. 000: FIFO is empty. 001: one valid byte in the FIFO. 010: two valid bytes in the FIFO. 011: three valid bytes in the FIFO. 100: four valid bytes in the FIFO. In master mode, when a byte is copied from the FIFO to the shift register, the status bits are decremented. In slave mode, the status bits are not decremented until the byte is transmitted out of the shift register. Therefore, in master mode, the status bits reflect the number of valid bytes in the FIFO. However, in slave mode, the status bits reflect the number of valid bytes in the FIFO and in the shift register. This behavior is due to a byte being immediately transmitted in master mode, whereas in slave mode, a valid byte can wait in the shift register for the master SPI to initiate a transfer.	
0	IRQ	SPI interrupt status bit. 0: cleared to 0 after reading the SPISTA register.	SM77

## SERIAL PERIPHERAL INTERFACE

**Table 154. SPISTA Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		1: set to 1 when an SPI-based interrupt occurs.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### SPI Receive Register

Address: 0x40004004, Reset: 0x0000, Name: SPIRX

**Table 155. SPIRX Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:8]	Reserved	Reserved.	
[7:0]	Value	8-bit receive register. A read of the receive FIFO returns the next byte to be read from the FIFO. A read of the FIFO when it is empty returns 0s.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### SPI Transmit Register

0x40004008, Reset: 0x0000, Name: SPITX

**Table 156. SPITX Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:8]	Reserved	Reserved.	
[7:0]	Value	8-bit transmit register. A write to the transmit FIFO address space writes data to the next available location in the transmit FIFO. If the FIFO is full, the oldest byte of data in the FIFO is overwritten. A read from this address location returns 0s.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### SPI Baud Rate Selection Register

Address: 0x4000400C, Reset: 0x0000, Name: SPIDIV

When setting the SPI serial clock, the PCLK frequency must be taken into account. The PCLK frequency can be no less than half the SPI serial clock frequency. For example, if the SPI clock divide register is set to 0x0000 (SCLK frequency =  $\frac{1}{2}$  UCLK frequency), the maximum that the CD bits can be set to is 2 (PCLK frequency =  $\frac{1}{4}$  UCLK frequency).

**Table 157. SPIDIV Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:8]	Reserved	Reserved.	
7	BCRST	Reset mode for CSERR. This bit is used to configure the expected behavior of the SPI interface logic after an abrupt deassertion of CS. 0: SPI interface logic continues from where it stopped. The SPI can receive the remaining bits when CS is asserted and user code must ignore the CSERR interrupt. 1: SPI interface logic is reset after a CSERR condition and user code must clear the SPI enable bit in the SPICON register.	
6	Reserved	This bit is reserved and must be written as 0 by user code.	
[5:0]	DIV	Factor used to divide UCLK to generate the serial clock. $f_{SERIAL\ CLOCK} = f_{UCLK} \div (2 \times (1 + DIV[5:0]))$	

## SERIAL PERIPHERAL INTERFACE

**Table 157. SPIDIV Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		Maximum frequency for the serial clock is $\frac{1}{2}$ the UCLK frequency. These bits are only used for master mode. In slave mode, there is no need to set the serial clock frequency. The slave receives the clock from the master.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## SPI Configuration Register

Address: 0x40004010, Reset: 0x0000, Name: SPICON

When changing the configuration, take care not to change it during a data transfer to avoid corrupting the data. It is recommended to change the configuration when the module is disabled (disable the SPI, enable = 0), then reconfigure and re-enable the SPI (enable = 1). When reconfiguring from slave mode to master mode, or vice versa, both FIFOs must be empty. It is recommended in slave mode to re-enable the SPI only if the CS line is high.

**Table 158. SPICON Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:14]	MOD	SPI IRQ mode bits. When the TIM bit is set, these bits configure when the transmit interrupt or receive interrupt occurs in a transfer. 00: transmit interrupt occurs when one byte has been transferred. Receive interrupt occurs when one or more bytes have been received into the FIFO. 01: transmit interrupt occurs when two bytes have been transferred. Receive interrupt occurs when two or more bytes have been received into the FIFO. 10: transmit interrupt occurs when three bytes have been transferred. Receive interrupt occurs when three or more bytes have been received into the FIFO. 11: transmit interrupt occurs when four bytes have been transferred. Receive interrupt occurs when the receive FIFO is full, or four bytes are present.	
13	TFLUSH	SPI transmit FIFO flush enable bit. 0: disable transmit FIFO flushing. 1: flush the transmit FIFO. This bit does not clear itself and must be toggled if a single flush is required. If this bit is left high, either the last transmitted value or 0x00 is transmitted, depending on the ZEN bit. Any writes to the transmit FIFO are ignored while this bit set.	
12	RFLUSH	SPI receive FIFO flush enable bit. 0: disable receive FIFO flushing. 1: flush the receive FIFO. This bit does not clear itself and must be toggled if a single flush is required. If this bit is set, all incoming data is ignored, and no interrupts are generated. If this bit is set and TIM = 0, a read of the receive FIFO initiates a transfer.	
11	CON	Continuous transfer enable bit. 0: disable continuous transfer. Each transfer consists of a single, 8-bit serial transfer. If valid data exists in the SPITX register, a new transfer is initiated after a stall period of one serial clock cycle. The CS line is deactivated for this one serial clock cycle. 1: enable continuous transfer. In master mode, the transfer continues until no valid data is available in the SPITX register. CS is asserted and remains asserted for the duration of each 8-bit serial transfer until SPITX is empty.	
10	LOOPBACK	Loopback enable bit. 0: normal mode. 1: connect MISO to MOSI. Data transmitted from the SPITX register is looped back to the SPIRX register. The MASEN bit must be set for loopback mode to work.	
9	OEN	Slave MISO output enable bit. 0: disable the output driver on the MISO pin. The MISO pin is open circuit when this bit is clear. 1: MISO operates as normal.	
8	RXOF	SPIRX overflow overwrite enable bit.	

**SERIAL PERIPHERAL INTERFACE****Table 158. SPICON Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		0: the new serial byte received is discarded. 1: the valid data in the SPIRX register is overwritten by the new serial byte received.	
7	ZEN	SPI transmit 0s when the transmit FIFO is empty. 0: transmit the last transmitted value when there is no valid data in the transmit FIFO. 1: transmit 0x00 when there is no valid data in the transmit FIFO.	
6	TIM	SPI transfer and interrupt mode bit. 0: initiate transfer with a read of the SPIRX register. The read must be done while the SPI interface is idle. Interrupt occurs only when the receiver is full. 1: initiate transfer with a write to the SPITX register. Interrupt occurs only when the transmitter is empty.	
5	LSB	LSB first transfer enable bit. 0: MSB is transmitted first. 1: LSB is transmitted first.	
4	WOM	SPI wire-OR'ed mode enable bit. 0: normal output levels. 1: enable open circuit data output.  Master mode: when a 0 is being transmitted on the MOSI pin, the output driver is enabled. When a 1 is being transmitted on the MOSI pin, the output driver is disabled, and an external pull-up resistor is required to pull the pin high. Typical resistor value is 1 kΩ.  Slave mode: when a 0 is being transmitted on the MISO pin, the output driver is enabled. When a 1 is being transmitted on the MISO pin, the output driver is disabled, and an external pull-up resistor is required to pull the pin high. Typical resistor value is 1 kΩ.	
3	CPOL	Serial clock polarity mode bit. 0: serial clock idles low. 1: serial clock idles high.	
2	CPHA	Serial clock phase mode bit. 0: serial clock pulses at the middle of the first data bit transfer. 1: serial clock pulses at the start of the first data bit.	
1	MASEN	Master mode enable bit. 0: enable slave mode. 1: enable master mode.	
0	Enable	SPI enable bit. 0: disable the SPI. Clearing this bit also resets all the FIFO related logic and bit counter to enable a clean start. This bit must be set to 0 in functional safety relevant applications. 1: enable the SPI.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## HIGH VOLTAGE PERIPHERAL CONTROL INTERFACE

### HIGH VOLTAGE PERIPHERAL CONTROL INTERFACE OVERVIEW

A high voltage peripheral is connected to the low voltage die via a serial interface. The low voltage die is the serial interface master. The serial interface is clocked with an inter-die communication clock (DCLK) (UCLK/8).

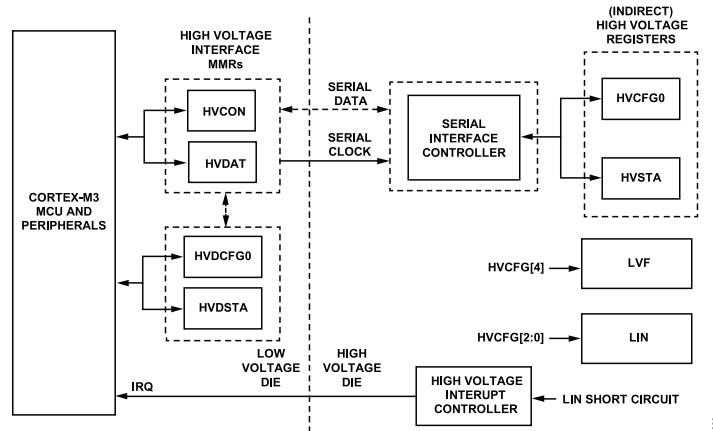


Figure 29. High Voltage Interface, Top Level Block Diagram

### HIGH VOLTAGE PERIPHERAL CONTROL INTERFACE OPERATION

The two following methods are implemented for communicating data to and from the top die of the ADuCM330WFS/ADuCM331WFS:

- ▶ An indirect high voltage register access method also known as the keyhole approach, which must be used for functional safety relevant applications. The indirect access is similar to previous intelligent battery sensor devices from Analog Devices.
- ▶ A direct MMR programming method, which is not used for functional safety relevant applications.

#### Indirect Approach

To read data or write data to the high voltage top die, an indirect high voltage register access method is implemented in the master side of the interface. This means that the user must use the HVDAT register and the HVCON register on the bottom die for accessing the registers on the top die.

A high voltage register access is initiated by writing the appropriate high voltage command into the HVCON register. After writing the appropriate high voltage command into the HVCON register, the HVCON register contains information on the progress and validity of the high voltage register access. After a high voltage register is accessed, the HVDAT register contains the last executed command in Register HVDAT, Bits[11:8].

The content of the HVDAT register after an executed high voltage command is as follows:

- ▶ High voltage read: after the high voltage register read is completed, the user can read the high voltage register data from the low byte of the HVDAT register.
- ▶ High voltage write: the data to be written to the high voltage register has to be programmed to the HVDAT register prior to initiating a high voltage register write.

On a high voltage interrupt event, a high voltage read of the HVSTA register is automatically initiated. If the high voltage interface is busy, the automatic HVSTA read commences when the current command completes. After the HVSTA read completes, an interrupt is issued to the core. Read the HVCON register to check the progress of the high voltage register access and check Register HVDAT, Bits[11:8] to confirm that the HVSTA read has been performed.

#### Direct MMR Programming

This method uses the HVDCFG0 register to write data to the HVCFG0 register on the high voltage top die. Writing a value to the HVDCFG0 register automatically initiates a write to the HVCFG0 register on the high voltage die. The HVDCFG0 register on the low voltage MMR is then automatically updated to the readback value from the top die.

## HIGH VOLTAGE PERIPHERAL CONTROL INTERFACE

The HVDSTA register on the low voltage die is a shadowed register of the HVSTA register on the high voltage die. On a high voltage interrupt, an HVSTA register read is automatically initiated and the shadowed HVDSTA is updated accordingly. An HVDSTA register update only occurs with a high voltage interrupt or when an HVSTA register read via the indirect high voltage register access method is performed.

When a high voltage interrupt occurs and the automatically initiated HVSTA read is not completed, the internal hardware associated with the shadowed MMRs reiterates an HVSTA read command until an HVSTA read has been performed. In case of a fault within a high voltage peripheral control interface, this feature prevents any further high voltage communication.

Therefore, it is recommended to implement a timeout counter functionality within the high voltage communication user code, which indicates a high voltage communication fault.

A delay of 20  $\mu$ s is required when using the direct high voltage register access method to ensure that data has been transferred correctly. To avoid this delay, the user can poll the HVCON register to check if the information has been written correctly.

### HIGH VOLTAGE DIE REGISTERS

The registers residing on the high voltage die can only be accessed using the high voltage peripheral control interface.

**Table 159. High Voltage Die Registers**

Name	Description	Access	Reset
HVCFG0	High voltage configuration register (accessible with indirect high voltage register access method)	Read/write	0x00
HVSTA	High voltage status register (accessible with indirect high voltage register access method)	Read	0x00
HVIREG	High voltage internal register (accessible with indirect high voltage register access method)	Read	0x82

## HIGH VOLTAGE PERIPHERAL CONTROL INTERFACE MEMORY MAPPED REGISTERS

**Table 160. High Voltage Peripheral Control Interface Memory Mapped Registers (Base Address 0x40003000)**

Offset	Name	Description	Access	Reset
0x0000	Reserved	User must not write to this location	Read	0x00
0x0004	HVCON	High voltage peripheral control interface command register (used with indirect high voltage register access method)	Read/write	0x0000
0x0008	Reserved	User must not write to this location	Read	0x00
0x000C	HVDAT	High voltage data register (used with indirect high voltage register access method)	Read/write	0x0800
0x0010	HVDCFG0	Shadowed high voltage configuration register (used with direct high voltage register access method)	Read/write	0x00
0x0018	HVDSTA	Shadowed high voltage status register (used with direct high voltage register access method)	Read	0x00
0x001C	Reserved	User must not write to this location	Read	0x00

### High Voltage Peripheral Control Interface Command Register

Address: 0x40003004, Reset: 0x0000, Name: HVCON

If the user is using the keyhole approach, the HVCON register and HVDAT register are used together.

To write data to the HVCFG0 register on the top die, first data is placed into the HVDAT register, and then 0x08 is written into the HVCON register.

To read data from the top die registers (HVCFG0 or HVSTA), 0x00 or 0x02 is placed in the HVCON register. A data read is then triggered from the top die, and the selected register contents are copied down into the HVDAT register. Care must be taken to observe the relevant busy, P\_BIT, and ACK\_BIT bits of the HVCON register.

The HVCON register accepts the following commands, as shown in Table 161, when written to.

When read, the HVCON register returns a 4-bit value.

**Table 161. HVCON Commands**

Group	Command	Description	Functional Safety Requirement
Read Commands	0x00	Read back high voltage register HVCFG0 into HVDAT	SM200
	0x02	Read back high voltage register HVSTA into HVDAT	SM200
	0x05	Read back high voltage register HVIREG into HVDAT	SM200

## HIGH VOLTAGE PERIPHERAL CONTROL INTERFACE

Table 161. HVCON Commands (Continued)

Group	Command	Description	Functional Safety Requirement
Write Commands	0x08	Write to high voltage register HVCFG0 from HVDAT	SM200
	Other	Reserved	

Table 162. HVCON Register Read Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[31:4]	Reserved	Reserved. These bits must be set to 0.	
3	MMRMODE_BUSY	0: no mirrored MMR write in progress. Previous mirrored MMR writes are completed. 1: mirrored MMR transaction in progress.  Do not write to high voltage die using keyhole method when this bit is set to 1.	SM200
2	ACK_BIT	0: high voltage slave transmit not acknowledge (NACK). 1: high voltage slave transmit acknowledge (ACK).	SM200
1	P_BIT	0: receive parity failed. 1: receive parity achieved.	SM200
0	Busy	1: indicates communication in progress. Further commands must not be issued. 0: indicates communication not in progress.	SM200

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## High Voltage Data Register

Address: 0x4000300C, Reset: 0x0800, Name: HVDAT

Register HVDAT, Bits[7:0] store the data read from or to be written to the top die.

Register HVDAT, Bits[11:8] store the last performed high voltage access command.

Table 163. HVDAT Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[31:12]	Reserved	Reserved.	
[11:8]	COM	Current command. Contains the last write to HVCON.	SM200
[7:0]	Data	Value of shift register in the communications. When transmissions occur, data is stored here.	SM200

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## High Voltage Configuration Register

Address: not applicable, indirectly addressed register, Reset: 0x00, Name: HVCFG0

The HVCFG0 register is located on the high voltage die and can be accessed via the indirect high voltage register access method and direct MMR programming method.

The HVCFG0 register is used to enable the LIN hardware, attenuator diagnostic features, and the low voltage flag.

Table 164. HVCFG0 Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:6]	Reserved	Reserved.	
5	ASEL	Voltage attenuator selection. 0: 1:24 attenuator connected to ADC1 input (default). 1: 1:48 attenuator connected to ADC1 input.	SM96

**HIGH VOLTAGE PERIPHERAL CONTROL INTERFACE****Table 164. HVCFG0 Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
4	LVFE	Low voltage flag enable bit. 0: disable the detection circuitry for the low voltage flag. 1: enable the detection circuitry for the low voltage flag, the status of which is reflected by the LVF bit in the HVSTA register.	
3	VE	Voltage attenuator diagnostic current enable bit. 0: disable the VBAT attenuator diagnostic function. 1: enable the VBAT attenuator diagnostic function.	SM92
2	IOE	LIN driver re-enable. If the current into or through the LIN pin exceeds $I_{LIN\_DOM\_MAX}$ , while in the dominant state, the LIN bus driver is disabled. The user writes to this bit to re-enable the LIN driver after an event like this. 0: automatically cleared by hardware after being set. 1: re-enable the LIN bus driver.	
1	DLSCP	Disable LIN short-circuit protection circuitry. It is recommended to set this bit to 0 in functional safety relevant applications. 0: allow short-circuit detection, and the LIN driver automatically disables. 1: disable the LIN driver auto-disable function. High voltage interrupt still issued in short-circuit detection.	SM35
0	LIN_EN	LIN transmit enable. 0: clear to 0 to disable the top die LIN transmitter. 1: set to 1 to enable the top die LIN transmitter.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**High Voltage Status Register**

Address: not applicable, indirectly addressed register, Reset: 0x00, Name: HVSTA

The HVSTA register is used to identify the high voltage hardware interrupt conditions.

**Table 165. HVSTA Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:4]	Revision ID	Revision ID bits for the high voltage die.	
3	Reserved	Reserved.	
2	LVF	Low voltage flag. 0: cleared to 0 automatically by hardware if the regulated supply drops below the specified limit. See the ADuCM330WFS/ADuCM331WFS data sheet. 1: set to 1 if the supply voltage has not dropped below the specified limit. Valid only if Register HVCFG0, Bit 4 is enabled.	
1	LSCS	LIN short-circuit status. 0: cleared to 0 if short-circuit condition is removed. 1: set to 1 if the current into or through the LIN pin exceeds $I_{LIN\_DOM\_MAX}$ , while in dominant state, indicative of a short circuit to VDD.	SM35
0	LSCI	LIN short-circuit interrupt. 0: cleared to 0 if the HVSTA register is read. 1: set to 1 if the current through the LIN pin exceeds $I_{LIN\_DOM\_MAX}$ , while in dominant state, indicative of a short circuit to VDD.	SM35

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## HIGH VOLTAGE PERIPHERAL CONTROL INTERFACE

### High Voltage Internal Register

Address: Not Applicable, Indirectly Addressed Register, Reset: 0x82, Name: HVIREG

The HVIREG register is used to provide a fixed, none zero read back value for diagnostic purposes.

*Table 166. HVIREG Register Bit Descriptions*

Bits	Name	Descriptions	Functional Safety Requirement
[7:0]	VALUE	Fixed, none zero value	SM200

### Shadowed High Voltage Configuration Register

Address: 0x40003010, Reset: 0x00, Name: HVDCFG0

HVDCFG0 is a shadowed MMR of the HVCFG0 register on the top die. Bit locations are identical.

### Shadowed High Voltage Status Register

Address: 0x40003018, Reset: 0x00, Name: HVDSTA

HVDSTA is a shadowed MMR of the HVSTA register on the top die. Bit locations are identical.

## LIN INTERFACE

### LIN OVERVIEW


The ADuCM330WFS/ADuCM331WFS implement a low overhead LIN interface that is compliant with LIN 1.3 and LIN 2.2/SAE J2602-2 specifications. The device operates as a slave only interface, operating from 1 kbps to 20 kbps. All lower rates are interpreted as 1 kbps.

The interface consists of a two-die solution. As shown in [Figure 30](#), an integrated LIN transceiver is present on the top die that communicates directly to the LIN logic on the bottom die. The logic uses three internal ARM Cortex-M3 processor interrupts, LININT0, LININT1, and LININT2, to signify to the core that a LIN event has occurred.

### LIN FEATURES


The following features are incorporated in the LIN interface:

- ▶ Efficient LIN data handling with storage for up to eight data bytes
- ▶ Built in parity check for protected identifier (PID)
- ▶ Framing error checking
- ▶ Running checksum (classic or enhanced) on received bytes
- ▶ Partial PID decoding to determine diagnostic master request frame
- ▶ Break symbol detection at any time
- ▶ Collision detection
- ▶ UART mode
- ▶ Automatic transceiver delay time compensation

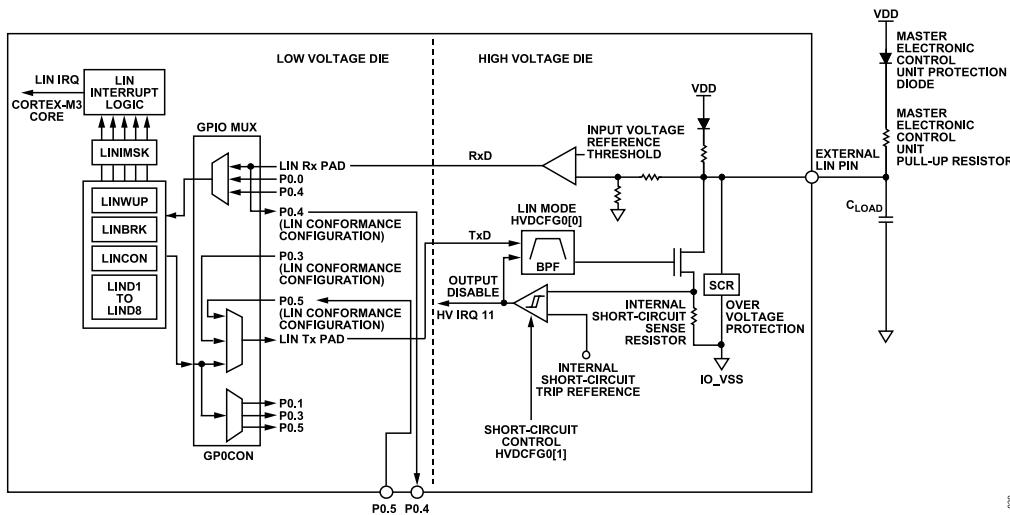

*Figure 30. LIN Block Diagram*

### LIN USER OPERATION

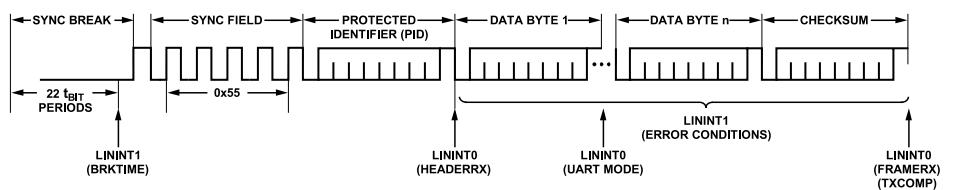

*Figure 31. LIN Interrupts*

### LIN Transmission

A maskable software interrupt (LININT0) occurs on the reception of a PID. After identifying the PID, the user code determines if the device must respond, receive, or ignore the PID. If a transmission is required, the user code must perform the following:

## LIN INTERFACE

- ▶ Set the number of bytes to transmit in the LINCNT register.
- ▶ Place all of the data bytes to transmit into their individual LINDx registers.
- ▶ Set Register LINCON, Bit 1 to 1 to signify begin transmission.

When the number of data bytes transmitted is equal to the value held in LINCNT, the checksum (which is automatically calculated) is then transmitted. After the checksum is transmitted, the frame is considered complete, and the LININT0 interrupt is set again.

## LIN Reception

The LIN interface automatically changes to receive mode on reception of a break symbol.

The LININT0 interrupt indicates that a PID has been received. If the software decides that full message reception is required, the expected number of bytes is placed in the LINCNT register, and the interface begins to receive all the data bytes from the master. When all expected bytes are received, the checksum calculation is started, and if the calculation is correct, LININT0 is triggered again.

If the software determines that the PID does not require a response, the LINCNT register must be set to 0 indicating to the hardware to ignore the rest of the frame.

With back to back LIN transmission, a minimum delay of one  $t_{BIT}$  period between frames is required to ensure no frames are missed. If a break arrives in the middle of a frame, the break is detected. However, if a frame completes, there is a period of time, less than  $1 t_{BIT}$  length, after the frame when a break is not detected and a frame may be missed.

## Sleep and Wake Functionality

The ADuCM330WFS/ADuCM331WFS LIN interface has integrated LIN sleep and wake functionality. The LININT2 interrupt is used to notify the user that a wake or sleep event has occurred. When the LININT2 interrupt is triggered, the user must interrogate the LINSTA register to determine the source of the interrupt.

The two LININT2 interrupt sources are as follows:

- ▶ The LIN interface has measured a period of inactivity on the LIN bus corresponding to the LNSLP register setting. The LNSLP register allows flexible configuring of the bus idle timeout time from 0.5 sec to 16 sec.




Figure 32. Sleep Interrupt

- ▶ The LIN interface has received a LIN wake-up frame during power-down mode. A valid wakeup is a dominant state on the LIN bus for a time set by the LINWUP register, followed by a rising edge. The LIN bus must remain high for at least two 32.768 kHz clock periods for the LININT2 interrupt to be generated.

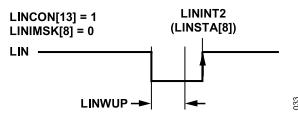


Figure 33. Wake-Up Interrupt

## LIN Diagnostic Frame Support

The ADuCM330WFS/ADuCM331WFS LIN interface has intelligent support for diagnostic command frames (PID 0x3C) from a LIN master. In the event a 0x3C PID is sent from the LIN master and Register LINCON, Bit 14 is cleared to 0, the ADuCM330WFS/ADuCM331WFS cannot generate a LININT0 PID interrupt. The ADuCM330WFS/ADuCM331WFS then generate a LININT0 frame received interrupt only on the following conditions:

- ▶ Byte 0 contains the node address for diagnostic (NAD) of the intelligent battery sensor (IBS) slave.
- ▶ Byte 0 contains 0x00 (sleep frame).
- ▶ Byte 0 contains 0x7F (broadcast frame).

## LIN INTERFACE

All other conditions cause the entire LIN diagnostic frame to be ignored, and no interrupt is generated on the LIN frame. This feature means there is minimum software intervention in servicing LIN diagnostic frames, and ensures that the ADuCM330WFS/ADuCM331WFS interrupts the user only due to frames that are of relevance to the IBS.

This feature can be disabled by setting Register LINCON, Bit 14 to 1. This setting ensures that a header received interrupt occurs on all 0x3C PID headers that occur on the LIN bus.

### Error Handling

The ADuCM330WFS/ADuCM331WFS LIN interface is capable of handling multiple error events. The LINSTA register reflects the source of the error.

The following errors can produce an interrupt:

- ▶ Collision detection: in the event of a collision during transmission, the hardware automatically ceases transmission, and a maskable LININT1 interrupt is generated.
- ▶ Maximum negative edges: if the interface receives more than the maximum negative edges expected in a LIN frame, a maskable LININT1 interrupt occurs.
- ▶ PID parity error flag: a LIN PID has two parity bits. If the received PID does not correctly match the LIN2.2 parity scheme specification, this error is flagged. A new break symbol clears this flag.
- ▶ Framing error flag: in the event of a frame error, this error is flagged. A new break symbol clears this flag.
- ▶ Checksum error: if the received checksum does not match the calculated checksum, this error condition occurs.

### LIN MEMORY MAPPED REGISTERS

*Table 167. LIN Memory Mapped Registers (Base Address 0x40005000)*

Offset	Name	Description	Access	Reset
0x0000	LINCON	LIN control register	Read/write	0x1000
0x0004	LINIMSK	LIN interrupt mask register	Read/write	0x0000
0x0008	LINBR	LIN baud rate count register	Read/write	0x0326
0x000C	LINBRK	LIN break symbol count register	Read/write	0x0454
0x0014	LINSAMP	LIN sampling delay count register	Read/write	0x00
0x0018	LINFORCE	LIN force low register (forces LIN low while its value > 0)	Read/write	0x0000
0x001C	LINWUP	LIN wake-up register (minimum LIN bus low time needed to wake up the device)	Write	0x0007
0x0020	LINCNT	LIN byte count register (for the entire LIN frame)	Read/write	0x18
0x0024	LINTRDLY	LIN transceiver delay compensation register	Read/write	0x00
0x0028	LINSLP	LIN bus idle timeout register	Read/write	0x08
0x002C	LINLCNT	LIN last byte count register (number of bytes in the last response frame)	Read	0x0000
0x0030	LINSTA	LIN status register	Read/write	0x0000
0x0038	LINSTA1	LIN Status 1 register	Read	0x0000
0x003C	LINPID	LIN PID register	Read	0x00
0x0040	LIND1	LIN Data Byte 1 register for receive or transmit	Read/write	0x00
0x0044	LIND2	LIN Data Byte 2 register for receive or transmit	Read/write	0x00
0x0048	LIND3	LIN Data Byte 3 register for receive or transmit	Read/write	0x00
0x004C	LIND4	LIN Data Byte 4 register for receive or transmit	Read/write	0x00
0x0050	LIND5	LIN Data Byte 5 register for receive or transmit	Read/write	0x00
0x0054	LIND6	LIN Data Byte 6 register for receive or transmit	Read/write	0x00
0x0058	LIND7	LIN Data Byte 7 register for receive or transmit	Read/write	0x00
0x005C	LIND8	LIN Data Byte 8 register for receive or transmit	Read/write	0x00
0x0060	LINFCS	LIN frame checksum register	Read	0x00
0x0064	LINCCS	LIN current calculated checksum register	Read	0xFF
0x0068	LINNAD	LIN node ID address register	Read/write	0xFF
0x006C	LININAD	LIN initial node ID register	Read/write	0x00
0x0070	LINFID	LIN initial function ID register	Read/write	0x0000
0x0074	LINVID	LIN variant ID register	Read/write	0x0000

## LIN INTERFACE

**Table 167. LIN Memory Mapped Registers (Base Address 0x40005000) (Continued)**

Offset	Name	Description	Access	Reset
0x0078	LINSUPID	LIN supplier ID register	Read/write	0x00
0x007C	LNSID	LIN service ID register	Read/write	0x00

### LIN Control Register

Address: 0x40005000, Reset: 0x1000, Name: LINCON

**Table 168. LINCON Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
15	TRDLY	Transceiver delay compensation. This bit, in association with the LINTRDLY register, is used to adjust the sampling point during transmit mode. The LINTRDLY register is used to compensate for transceiver transmit to receive delay time. 0: cleared to 0 to enable automatic tracking of transceiver delay time between transmit and receive (default). The LINTRDLY register is automatically updated on the beginning of every byte by measuring the falling edge transition of the start bit. 1: set to 1 to disable automatic delay compensation and enable manual programming of the LINTRDLY register. Software can write an appropriate value to compensate for transceiver delay time.	SM30 to SM38
14	PIDRXINT	PID received interrupt (PID = 0x3C) enable. 0: cleared to 0 to disable header received interrupt for diagnostic frame with PID as 0x3C (default). 1: set to 1 to enable header received interrupt for diagnostic frame with PID as 0x3C.	
13	WUPEN	Wake-up enable. 0: cleared to 0 to enable wake-up detection only when the core is in hibernate mode (default). 1: set to 1 to enable wake-up detection in hibernate mode, active mode, and system halt power mode. If wake-ups are not required to generate an interrupt in active mode or system halt mode (SYSHALT), this bit must be cleared.	
12	TXTIMEOUT	Transmit dominant timeout check. The transmit signal is checked by a running counter. If the transmit signal is held low for more than 100 ms, this counter logic forces the transmit signal high. 0: cleared to 0 to disable dominant timeout check on transmit signal. 1: set to 1 to enable dominant timeout check on transmit signal (default).	
11	SYNC	Synchronization error check. The duration of the bits in the synchronization symbol in the LIN synchronization field are measured with respect to the duration of the start bit of the synchronization symbol. If the duration of successive bits in the synchronization symbol are either more than twice or less than half of the duration of the start bit, frame reception is aborted. 0: cleared to 0 to enable synchronization symbol error check. 1: set to 1 to disable synchronization symbol error check.	SM37
10	NAD	Node address for diagnostic (NAD) match. 0: cleared to 0 to enable NAD match check. Diagnostic frame is only recognized if NAD matches. 1: set to 1 to disable NAD match check. Diagnostic frame is always recognized.	
9	COLL	Collision check. This bit is used to disable collision check using the sampled receive line and transmit data value. Collisions are checked only at the sampling instant in the response field if the direction bit (RXTXMODE), Register LINCON, Bit 1, is set. 0: cleared to 0 to enable collision check. This is the default state. 1: set to 1 to disable collision check.	SM30
8	SLEEPEN	Enable sleep counter. This bit enables the counter that monitors the LIN line for inactivity. The LNSLP register determines the bus idle timeout period. 0: cleared to 0 to disable sleep counter. 1: set to 1 to enable sleep counter.	
7	CSCLR	Checksum clear. 1: this is a write only bit and when set to 1, clears the calculated checksum. This bit reads back a 0.	SM31
6	UARTEN	UART mode enable. This mode is used to transmit or receive data one byte at a time and is not LIN protocol compliant. LIND1 is the only register that participates in this mode. Register LINCON, Bit 1 must be cleared to allow receive of data bytes.	

**LIN INTERFACE****Table 168. LINCON Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		0: cleared to 0 for normal LIN protocol mode of operation. 1: set to 1 to allow transmission without receiving the frame header (UART mode).	
5	BYPASSEN	LIN bypass enable. 0: cleared to 0 for LIN normal mode. 1: set to 1 allows the user to take control of the LIN output of the LIN block (to perform LIN conformance tests).	
4	SYNCTIM	Timing of synchronization symbol Bit 0 (not required in a single slave system). This bit ensures that if a second break is transmitted, the second break is recognized as such and not timed as part of the synchronization symbol. If the start symbol is more than the number of clock cycles dictated by this bit, the device assumes it is now receiving a break and continues to count the low cycle to verify if the break meets the minimum time required for a break, as defined in the LINBRK MMR. 0: cleared by user. The start bit of the synchronization symbol must be less than 8872 PCLK clock counts. 1: set by user. The start bit of the synchronization symbol must be less than 1209 PCLK clock counts.	
3	LEN	Stop bit length. 0: if cleared, one stop bit is sent while transmitting. 1: if set, two stop bits are sent while transmitting.	
2	CSCALC	Checksum calculation. This bit must be modified simultaneously with Register LINCON, Bit 0. 0: cleared to 0 to calculate an enhanced checksum, PID included. 1: set to 1 to calculate automatically a classic checksum, PID excluded.	SM31
1	RXTXMODE	Receive or transmit mode. 0: cleared to 0 when a break symbol is received or when transmit is complete. Also cleared when 0 is written to Register LINCON, Bit 0. 1: set to 1 to transmit data bytes after decoding the PID.	
0	LINENABLE	LIN enable bit. 0: cleared to 0 by user code to disable the LIN interface or to reset the interface. 1: set to 1 by user code to enable the LIN interface. Clearing this bit resets all LIN interface registers to their default values, except for the following: Register LINSTA, Bits[4:0], Register LINSTA, Bits[13:11], Register LINCON, Bits[8:7], Register LINCON, Bits[13:12], and Register LINCON, Bit 15.	SM30 to SM38

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**LIN Interrupt Mask Register**

Address: 0x40005004, Reset: 0x0000, Name: LINIMSK

**Table 169. LINIMSK Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
15	STOPSTART	Start and stop bit error interrupt mask. 0: cleared to 0 by user to enable the start and stop bit error detection. 1: set by user to disable the start and stop bit error detection.	SM33
14	SYNC	Synchronization field error interrupt mask. 0: cleared to 0 by user to enable the interrupt on synchronization field error detection on LININT1. 1: set by user to disable the interrupt synchronization field error detection on LININT1.	SM37
[13:12]	Reserved	Reserved. These bits must be set to 0.	
11	UARTMODE	UART mode interrupt mask. 0: cleared to 0 by user to enable the interrupt in UART mode on LININT0. 1: set to 1 by user to disable the interrupt in UART mode on LININT0.	
10	MAXBRK	Maximum break time interrupt mask.	

**LIN INTERFACE****Table 169. LINIMSK Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		0: cleared to 0 by the user to enable the maximum break time interrupt on LININT1. 1: set to 1 by the user to disable the maximum break time interrupt on LININT1.	
9	MAXNEGEDGE	Maximum negative edges in the frame interrupt mask. An interrupt is generated if more than 57 falling edges are detected in a frame. 0: cleared to 0 by the user to enable the maximum negative edges in the frame interrupt on LININT1. 1: set to 1 by the user to disable the maximum negative edges in the frame interrupt on LININT1.	SM38
8	Wakeup	Wake-up interrupt mask. 0: cleared by the user to enable the wake-up interrupt on LININT2. 1: set to 1 by the user to disable the wake-up interrupt on LININT2.	SM78
7	Sleep	Sleep interrupt mask. 0: cleared by the user to enable the bus idle timeout sleep interrupt on LININT2. 1: set to 1 by the user to disable the bus idle timeout sleep interrupt on LININT2.	
6	FRAMEERR	Frame error interrupt mask. An interrupt is generated if framing error is detected. 0: cleared to 0 by the user to enable the framing error interrupt on LININT1. 1: set to 1 by the user to disable the framing error interrupt on LININT1.	SM33
5	COLLDETECT	Collision detect interrupt mask. 0: cleared to 0 by the user to enable the collision detect interrupt on LININT1. 1: set to 1 by the user to disable the collision detect interrupt on LININT1.	SM30
4	CSERR	Checksum error detected interrupt mask. 0: cleared to 0 by the user to enable the checksum error detected interrupt on LININT1. 1: set to 1 by the user to disable the checksum error detected interrupt on LININT1.	SM31
3	PIDPARITY	PID parity error interrupt mask. 0: cleared to 0 by the user to enable the PID parity error interrupt on LININT1. 1: set to 1 by the user to disable the PID parity error interrupt on LININT1.	SM32
2	TXCOMP	Transmit complete interrupt mask. 0: cleared to 0 by the user to enable the transmit complete interrupt on LININT0. 1: set to 1 by the user to disable the transmit complete interrupt on LININT0.	
1	FRAMERX	Frame received interrupt mask. An interrupt is generated when a complete frame is received. 0: cleared to 0 by the user to enable the frame received interrupt on LININT0. 1: set to 1 by the user to disable the frame received interrupt on LININT0.	
0	HEADERRX	Header received interrupt mask. 0: cleared to 0 by the user to enable the header received interrupt on LININT0. 1: set to 1 by the user to disable the header received interrupt on LININT0. An interrupt is not generated for the master request frame (PID = 0x3C) if Register LINCON, Bit 14 is cleared.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**LIN Baud Rate Count Register**

Address: 0x40005008, Reset: 0x0326, Name: LINBR

**Table 170. LINBR Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[15:0]	BAUDRATE	Current baud rate value. User software must check this register to ensure that the baud rate is within expected limits. Baud rate = PCLK/LINBR.	SM21

## LIN INTERFACE

### LIN Break Symbol Count Register

Address: 0x4000500C, Reset: 0x0454, Name: LINBRK


**Table 171.** LINBRK Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	LINBRK	Contains the value after which the first break is considered valid. The value represents the time taken for 11 bits to be transmitted at 20 kbps (clock at 16 MHz). Break period = $(\text{LINBRK} \times 8 + 7) \times t_{\text{PCLK}}$ .	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Sampling Delay Count Register

Address: 0x40005014, Reset: 0x00, Name: LINSAMP

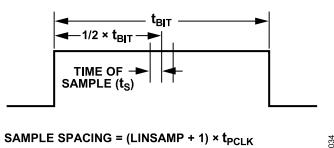

**Figure 34.** LIN Bit Sample Spacing

**Table 172.** LINSAMP Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:0]	LINSAMP	Contains the count of clock cycles after which the LIN input line is sampled. Three such samples are taken, and the majority value of these three samples determines the value of the bit. Sample spacing = $(\text{LINSAMP} + 1) \times t_{\text{PCLK}}$ .	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Force Low Register

Address: 0x40005018, Reset: 0x0000, Name: LINFORCE

**Table 173.** LINFORCE Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	LINFORCE	Low period = $\text{LINFORCE} \times 8 \times t_{\text{PCLK}}$ . If Register LINCON, Bit 12 is set and a transmit timeout has already occurred, a break must be detected to allow the LINFORCE register to force the LIN line low again.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Wake-Up Register

Address: 0x4000501C, Reset: 0x0007, Name: LINWUP

**Table 174.** LINWUP Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	LINWAKEUP	Wake-up period > $\text{LINWUP} \times \text{clock period } (t_{\text{FOSC}})$ . This is the minimum low period on the LIN line to guarantee a wake-up.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## LIN INTERFACE

### LIN Byte Count Register

Address: 0x40005020, Reset: 0x18, Name: LINCNT

*Table 175. LINCNT Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:4]	Count	This field gives status information about the number of complete bytes sent and received. This number is updated at the end of the stop symbol of each byte.	
[3:0]	NUMBYTES	Indicates the number of data bytes in the frame. Reset to 8 after the break is detected.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Transceiver Delay Compensation Register

Address: 0x40005024, Reset: 0x00, Name: LINTRDLY

*Table 176. LINTRDLY Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement
[7:0]	TRDLY	This field can be manually configured by software or is filled automatically by hardware, depending on Register LINCON, Bit 15. If Register LINCON, Bit 15 is cleared, this register is automatically programmed by hardware to compensate for the transceiver delay time between transmit and receive (default). If Register LINCON, Bit 15 is set, manual programming of this register is required to compensate for the transmit to receive delay time. Software must write an appropriate value to compensate for the transceiver delay time. Delay adjustment = (LINTRDLY + 1) × t <sub>PCLK</sub> . If the user is setting this value manually, the user needs to measure from transmit to receive and set the appropriate value as per the equation to reflect the delay.	SM30

### LIN Bus Idle Timeout Register

Address: 0x40005028, Reset: 0x08, Name: LNSLP

*Table 177. LNSLP Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[4:0]	SLPVAL	This register defines the bus idle timeout period. When Register LINCON, Bit 8 is set, the hardware counts down from the timeout set by this register and generates a maskable interrupt, LININT2. The default value reflects a bus idle timeout of 4.096 sec. Bus idle period = LNSLP × 214 × 31.25 µs.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Last Byte Count Register

Address: 0x4000502C, Reset: 0x0000, Name: LINLCNT

*Table 178. LINLCNT Register Bit Descriptions*

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[3:0]	NUMBYTES	This register indicates the number of data bytes in the previous LIN frame for both receive mode and transmit mode. Increment occurs for data bytes and CSUM byte. This register has a maximum value of 9, and the next counter iteration results in a value of 1. This register is not reset by hardware. Software in the LININT0 PID interrupt is expected to write any value to clear this register.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**LIN INTERFACE****LIN Status Register**

Address: 0x40005030, Reset: 0x0000, Name: LINSTA

Data written to the LINSTA register requires two low frequency oscillator clock periods before it is guaranteed to be latched.

**Table 179. LINSTA Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
15	STOPSTART	Start and stop bit error. 0: cleared to 0 by a break detect or by writing 1 to this bit location. This bit is also cleared when 0 is written to Register LINCON, Bit 0. 1: set to 1 if the received signal start bit is sampled high or the stop bit is sampled low. This check is performed both while receiving or transmitting.	SM33
14	SYNCERR	Synchronization field error status. Generates a maskable interrupt (LININT1). 0: cleared to 0 by a break detect or by writing 1 to this bit location. This bit is also cleared when 0 is written to Register LINCON, Bit 0. 1: set to 1 when error is detected in the synchronization field. The synchronization bits in the synchronization field are timed by the duration of the synchronization field start bit. If the duration of successive bits are less than half or more than twice the duration of the start bit, the frame is aborted and this bit is set. This bit is also set if the overall duration of the synchronization field exceeds a maximum value.	SM37
13	COLL	Collisions bit value. This bit has meaning only if Register LINSTA, Bit 5 is set and indicates the status of the transmit bit when collision occurs. This bit is cleared by writing 1 to this bit location.	SM30
12	UARTDATA	UART data byte received status. Generates a maskable interrupt (LININT0). 0: cleared to 0 by reading the LIND1 register or by writing 1 to this bit location. 1: set to 1 when a byte is received into the LIND1 register in UART receive mode.	
11	UARTTX	UART transmit complete status. Generates a maskable interrupt (LININT0). 0: cleared to 0 on a write to the LIND1 register or by writing 1 to this bit location. This bit is cleared when 0 is written to Register LINCON, Bit 0. 1: set to 1 when the content of the LIND1 register is transmitted onto the LIN bus in UART transmit mode, and new data can be written to the LIND1 register.	
10	BRKTIME	Break time maximum status. Generates a maskable interrupt (LININT1). 0: this bit is only cleared when the LIN interface is disabled, which is when Register LINCON, Bit 0 = 0. 1: set to 1 if a break symbol is longer than 22 bits. This maximum break time is based on the contents of the LINBRK register and can change if the contents of the LINBRK register change. Frame reception continues if this bit is set.	
9	MAXNEGEDGE	Negative edge maximum error status. Generates a maskable interrupt (LININT1). 0: cleared to 0 if the number of negative edges allowed in a frame is not surpassed. This bit is also cleared when 0 is written to Register LINCON, Bit 0. 1: set to 1 if the number of negative edges is 57 or more. This bit is not required to be written by software and is cleared when a break is detected.	SM38
8	WAKESTA	Wake-up status. Generates a maskable interrupt (LININT2). 0: this bit is cleared when 0 is written to Register LINCON, Bit 0 or by writing 1 to this bit location. This bit must be cleared by software. 1: set to 1 when in sleep (power-down) mode if the LIN line is detected to be low for a longer time than programmed by LINWUP, followed by a rising edge.	
7	SLEEPSTA	Sleep status. Generates a maskable interrupt (LININT2). 0: this bit is cleared when 0 is written to Register LINCON, Bit 0 or by writing 1 to this bit location. This bit must be cleared by software. 1: set to 1 if LIN bus remains at the same state for more than the value indicated by the LINSLP register.	
6	FRMERR	Framing error status in receive mode. Generates a maskable interrupt (LININT1). 0: cleared to 0 when 0 is written to Register LINCON, Bit 0. This bit is cleared by writing 1 to this bit location. 1: set to 1 if a valid start or stop is not detected in receive mode, or if after receiving a sync, it is determined that the break was less than $11 t_{BIT}$ long.	SM33
5	COLLDETECT	LIN collision detect status. Generates a maskable interrupt (LININT1).	SM30

## LIN INTERFACE

**Table 179. LINSTA Register Bit Descriptions (Continued)**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
		0: cleared to 0 by a break detect or when 0 is written to Register LINCON, Bit 0. 1: set to 1 automatically by the hardware if the device has stopped transmission due to a collision on the bus. Write 1 via the software to clear this bit. This bit is set only on a collision of data bits.	
4	CSMATCH	Checksum match status. An error condition generates a maskable interrupt (LININT1) 0: cleared to 0 by a break detect or by writing 1 to this bit location. 1: set to 1 when the checksum does not match. This is an error condition at the end of the frame, which generates an interrupt.	SM31
3	PIDPARITY	PID parity error status. Generates a maskable interrupt (LININT1). 0: cleared to 0 by a break detect or by writing 1 to this bit location. 1: set to 1 by hardware if the received PID byte does not correctly match the parity scheme for a PID, as described in the LIN2.2 specifications.	SM32
2	TXCOMP	Transmit complete. Generates a maskable interrupt (LININT0). 0: this bit is cleared by a break detect or by writing 1 to this bit location. 1: this bit is set when the last bit of the checksum byte is transmitted after transmitting all data bytes.	
1	FRAMERX	Frame received status. Generates a maskable interrupt (LININT0). 0: cleared to 0 by a break detect or by writing 1 to this bit location. 1: set to 1 if the full frame is received. If PID = 0x3C, NAD matches (or broadcast address). For all frames, checksum must match.	
0	HEADERRX	Header received status. Generates a maskable interrupt (LININT0). 0: cleared to 0 by a break detection or by writing 1 to this bit location. 1: set to 1 when a header is received. For PID = 0x3C, this status bit setting also depends on Register LINCON, Bit 14. PID parity check must also pass.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## LIN Status 1 Register

Address: 0x40005038, Reset: 0x0000, Name: LINSTA1

**Table 180. LINSTA1 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:1]	Reserved	Reserved. These bits return 0 when read.	
0	FRMINCOMP	Incomplete frame received. 0: cleared to 0 by writing 1 to this bit location. 1: set to 1 when a break is detected and the expected number of bytes in the previous frame (Register LINCNT, Bits[3:0] + 1) is not the same as the actual number of bytes received (Register LINCNT, Bits[7:4]). This bit is not set if Register LINCNT, Bits[3:0] are equal to zero. The plus one is to account for the checksum byte. This status refers to the previous frame and is set for the first frame after enabling LIN. This register is superseded by the LINLCNT register. It is recommended to use the LINLCNT register to determine the completion status of the previous frame.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## LIN PID Register

Address: 0x4000503C, Reset: 0x00, Name: LINPID

## LIN INTERFACE

**Table 181.** LINPID Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	PIDRX	LIN PID received. Updated when the stop bit of the PID is received. Parity bits are not saved, but are checked in hardware.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## LIN Data Byte Registers

### LIN Data Byte 1 for Receive or Transmit

Address: 0x40005040, Reset: 0x00, Name: LIND1

**Table 182.** LIND1 Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:0]	DATABYTE1	Data Byte 1 for receive or transmit. Also used in UART mode. See Register LINCON, Bit 6 in <a href="#">Table 168</a> .	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Data Byte 2 for Receive or Transmit

Address: 0x40005044, Reset: 0x00, Name: LIND2

**Table 183.** LIND2 Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:0]	DATABYTE2	Data Byte 2 for receive or transmit.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Data Byte 3 for Receive or Transmit

Address: 0x40005048, Reset: 0x00, Name: LIND3

**Table 184.** LIND3 Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:0]	DATABYTE3	Data Byte 3 for receive or transmit.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Data Byte 4 for Receive or Transmit

Address: 0x4000504C, Reset: 0x00, Name: LIND4

**Table 185.** LIND4 Register Bit Descriptions

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:0]	DATABYTE4	Data Byte 4 for receive or transmit.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Data Byte 5 for Receive or Transmit

Address: 0x40005050, Reset: 0x00, Name: LIND5

## LIN INTERFACE

**Table 186. LIND5 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:0]	DATABYTE5	Data Byte 5 for receive or transmit.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Data Byte 6 for Receive or Transmit

Address: 0x40005054, Reset: 0x00, Name: LIND6

**Table 187. LIND6 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:0]	DATABYTE6	Data Byte 6 for receive or transmit.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Data Byte 7 for Receive or Transmit

Address: 0x40005058, Reset: 0x00, Name: LIND7

**Table 188. LIND7 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:0]	DATABYTE7	Data Byte 7 for receive or transmit.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Data Byte 8 for Receive or Transmit

Address: 0x4000505C, Reset: 0x00, Name: LIND8

**Table 189. LIND8 Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:0]	DATABYTE8	Data Byte 8 for receive or transmit.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Frame Checksum Register

Address: 0x40005060, Reset: 0x00, Name: LINFCS

**Table 190. LINFCS Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[7:0]	LINFCS	While receiving a frame, a received checksum byte is saved into this register.	SM31

### LIN Current Calculated Checksum Register

Address: 0x40005064, Reset: 0xFF, Name: LINCCS

## LIN INTERFACE

**Table 191. LINCCS Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement
[7:0]	LINCCS	Current calculated checksum value.	SM31

### LIN Node ID Address Register

Address: 0x40005068, Reset: 0xFF, Name: LINNAD

**Table 192. LINNAD Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:0]	NODEID	LIN node address register. For further information, refer to the LIN 2.2A specification.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Initial Node ID Register

Address: 0x4000506C, Reset: 0x00, Name: LININAD

**Table 193. LININAD Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:0]	INITNODEID	LIN initial node address register. For further information, refer to the LIN 2.2A specification.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Initial Function ID Register

Address: 0x40005070, Reset: 0x0000, Name: LINFID

**Table 194. LINFID Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	FUNCID	LIN function ID register. For further information, refer to LIN 2.2A specification.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Variant ID Register

Address: 0x40005074, Reset: 0x0000, Name: LINVID

**Table 195. LINVID Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	VARID	LIN variant ID register. For further information, refer to the LIN 2.2A specification.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

### LIN Supplier ID Register

Address: 0x40005078, Reset: 0x00, Name: LINSUPID

## LIN INTERFACE

**Table 196. LINSUPID Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:0]	SUPID	LIN supplier ID register. For further information, refer to the LIN 2.2A specification.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## LIN Service ID Register

Address: 0x4000507C, Reset: 0x00, Name: LNSID

**Table 197. LNSID Register Bit Descriptions**

Bits	Name	Description	Functional Safety Requirement <sup>1</sup>
[7:0]	SERVID	LIN service ID register. For further information, refer to the LIN 2.2A specification.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## DEVICE IDENTIFICATION

For traceability, device identification is available at power-up. This traceability information is contained across five registers: R4, FEEDATL, chip ID, System Serial ID 0, and System Serial ID 1.

### R4

After kernel execution, this 32-bit register, R4, holds the assembly lot ID. This information must be saved to a known SRAM location before user code is executed.

### FEEDATL REGISTER

Address: 0x40018010, Reset: 0xF330030E (ADuCM330WFS) or 0xF331030E (ADuCM331WFS), Name: FEEDATL

After kernel execution, the FEEDATL MMR contains information that can be used to identify the ADuCM330WFS/ADuCM331WFS. This information must be saved to a known SRAM location before user code is executed.

*Table 198. FEEDATL Register Bit Descriptions*

Bits	Description	Functional Safety Requirement
[31:16]	Identity of the ADuCM330WFS/ADuCM331WFS. Confirm the device identification for functional safety relevant applications. ADuCM330WFS: 0xF330, ADuCM331WFS: 0xF331.	SM300
[15:0]	Silicon mask revision ID, kernel revision ID, and kernel minor revision number. Same as Register SYSSER1, Bits[31:16], 0x030E.	SM300

### CHIP ID REGISTER

Address: 0x40002024, Reset: 0x59, Name: CHIPID

The chip identification register is a 16-bit field that identifies the implemented ARM Cortex-M3 processor low power platform and the silicon revision.

*Table 199. Chip ID Register*

Offset	Name	Description	Access	Reset
0x0000	CHIPID	Chip identification register	Read	0x0059

*Table 200. Chip ID Register Bit Descriptions*

Bits	Description	Functional Safety Requirement
[15:4]	Low voltage die hardware identification, 0x5 = ADuCM330WFS/ADuCM331WFS ARM Cortex-M3 processor device.	SM300
[3:0]	Low voltage die hardware revision. 0x3 = ADuCM330/ADuCM331. 0x9 = ADuCM330WFS/ADuCM331WFS.	SM300

### SYSTEM SERIAL ID 0

Address: 0x000207F0, Reset: 0xFFFFFFFF, Name: SYSSER0

A 32-bit location that holds the value of the original manufacturing lot number from which this specific ADuCM330WFS/ADuCM331WFS device was manufactured (bottom die only). Used in conjunction with SYSSER1, this lot number allows the full manufacturing history of this device to be traced (bottom die only).

*Table 201. System Serial ID 0 Register*

Offset	Name	Description	Access	Reset
0x0000	SYSSER0	Holds the value of the original manufacturing lot number.	Read	0xFFFFFFFF

*Table 202. SYSSER0 Register Bit Descriptions*

Bits	Description	Functional Safety Requirement <sup>1</sup>
[31:27]	Wafer number. The five bits read from this location give the wafer number (1 to 24) from the wafer fabrication lot ID (from which this device originated).	
[26:22]	Wafer lot fabrication plant. The five bits read from this location reflect the manufacturing plant associated with this wafer lot.	
[21:16]	Wafer lot fabrication ID. The six bits read from this location form part of the wafer lot fabrication.	

## DEVICE IDENTIFICATION

**Table 202. SYSSER0 Register Bit Descriptions (Continued)**

Bits	Description	Functional Safety Requirement <sup>1</sup>
[15:0]	Wafer lot fabrication ID. These 16 LSBs hold a 16-bit number to be interpreted as the wafer fabrication lot ID number.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

## SYSTEM SERIAL ID 1

Address: 0x00207F4, Reset: 0xXXXXXXXX, Name: SYSSER1

A 32-bit location that holds the values of the device ID number, silicon mask revision number, and kernel revision number of the bottom die only, as detailed in [Table 204](#).

**Table 203. System Serial ID1 Register**

Offset	Name	Description	Access	Reset
0x0000	SYSSER1	Holds the values of the device ID number, silicon mask revision number, and kernel revision number.	Read	0xXXXXXXXX

**Table 204. SYSSER1 Register Bit Descriptions**

Bits	Description	Functional Safety Requirement <sup>1</sup>
[31:28]	Silicon mask revision ID. The four bits read from this nibble reflect the silicon mask ID number. The value range for the ADuCM330/ADuCM331 is interpreted as 0x41 to 0x4F, reflecting the ASCII A to O characters. The value range for the ADuCM330WFS/ADuCM331WFS is interpreted as 0x50 to 0x5A, reflecting the ASCII P to Z characters.	SM300
[27:20]	Kernel revision ID. This byte contains the hexadecimal number, which is interpreted as an ASCII character indicating the revision of the kernel firmware embedded in the on-chip Flash/EE memory. For example, reading 0x31 from this byte is interpreted as 1, indicating a Revision 1 kernel is on chip.	SM300
[19:16]	These bits refer to the kernel minor revision number of the device.	SM300
[15:0]	Device ID. These 16 LSBs hold a 16-bit number that is interpreted as the device ID number. When used in conjunction with the value in SYSSER0 (the manufacturing lot ID), this number is a unique identifier for the device.	

<sup>1</sup> The blank rows in this column mean that the configuration of bit(s) may have a functional safety relevance in the end user application. The end user should consider in their case whether there is any potential functional safety impact related to the bit(s) and develop additional fault detection and control mechanisms as necessary.

**COMPLETE MMR LISTING****Table 205. ADuCM330WFS/ADuCM331WFS Memory Map Summary**

Base Address	Peripheral
0x000207E2	SM91 gain calibration coefficient
0x000207F0	System serial ID
0x40000000	General-Purpose Timer 0
0x40002000	SRAM, clock control, and hardware identification
0x40002400	Interrupt detection, power mode, and reset
0x40002500	Wake-up timer
0x40002580	Watchdog timer
0x40003000	High voltage peripheral interface
0x40004000	SPI
0x40005000	LIN
0x40005C00	High frequency oscillator calibration
0x40006000	GPIO
0x40008824	Reference control
0x40009C00	Low frequency oscillator calibration
0x40018000	Flash controller
0x40030000	ADC
0xE000E004	ARM Cortex-M3 processor and NVIC

**Table 206. SM91 Gain Calibration Coefficient Register (Base Address 0x000207E2)**

Offset	Name	Description	Access	Reset
0x0000	SM91GN	Calibration coefficient value for SM91.	Read	0xFFFF

**Table 207. System Serial ID Memory Mapped Registers (Base Address 0x000207F0)**

Offset	Name	Description	Access	Reset
0x0000	SYSSERO	System Serial ID 0 register	Read	0xFFFFFFFF
0x0004	SYSSER1	System Serial ID 1 register	Read	0xFFFFFFFF

**Table 208. General-Purpose Timer 0 Memory Mapped Registers (Base Address 0x40000000)**

Offset	Name	Description	Access	Reset
0x0000	T0VAL0	General-purpose timer current count value (LSB) register	Read	0x0000
0x0004	T0VAL1	General-purpose timer current count value (MSB) register	Read	0x0000
0x0008	T0CON	General-purpose timer control register	Read/write	0x0040
0x000C	T0EN	General-purpose timer enable register	Read/write	0x0000
0x0010	T0TOFA0	General-purpose timer Timeout Field A (LSB) register	Read/write	0x1FFF
0x0014	T0TOFA1	General-purpose timer Timeout Field A (MSB) register	Read/write	0x0000
0x0018	T0TOFB0	General-purpose timer Timeout Field B (LSB) register	Read/write	0x2FFF
0x001C	T0TOFB1	General-purpose timer Timeout Field B (MSB) register	Read/write	0x0000
0x0020	T0TOFC0	General-purpose timer Timeout Field C (LSB) register	Read/write	0x3FFF
0x0024	T0TOFC1	General-purpose timer Timeout Field C (MSB) register	Read/write	0x0000
0x0028	T0IEN	General-purpose timer interrupt enable register	Read/write	0x0000
0x002C	T0ISTA	General-purpose timer interrupt status register	Read	0x0000
0x0030	T0CLRI	General-purpose timer clear interrupts register	Write	0x0000

**Table 209. Clock Control Memory Mapped Register (Base Address 0x40002000)**

Offset	Name	Description	Access	Reset
0x0000	CLKCON	System clocks control register	Read/write	0x00E0

**Table 210. Hardware Identification Memory Mapped Registers (Base Address 0x40002000)**

Offset	Name	Description	Access	Reset
0x0024	CHIPID	Chip identification register	Read	0x0059

**COMPLETE MMR LISTING****Table 211. SRAM Memory Mapped Registers (Base Address 0x40002000)**

Offset	Name	Description	Access	Reset
0x002C	SRAMCTRL	SRAM control register	Read/write	0x0001
0x0030	SRAMERR	SRAM error location register	Read	0x0000

**Table 212. Power Mode Memory Mapped Registers (Base Address 0x40002400)**

Offset	Name	Description	Access	Reset
0x0000	PWRMOD	Power mode control register	Read/write	0x00
0x0004	PWRKEY	Power mode key register	Read/write	Not applicable

**Table 213. Interrupt Detection Unit Memory Mapped Registers (Base Address 0x40002400)**

Offset	Name	Description	Access	Reset
0x0020	EI0CFG	External interrupt configuration register	Read/write	0x0000
0x0030	EICLR	External interrupt clear register	Read/write	0x0000

**Table 214. Reset Memory Mapped Register (Base Address 0x40002400)**

Offset	Name	Description	Access	Reset
0x0040	RSTSTA	Reset status register	Read	Depends on type of reset
0x0040	RSTCLR	Reset clear register	Write	Not applicable

**Table 215. Wake-Up Timer Memory Mapped Registers (Base Address 0x40002500)**

Offset	Name	Description	Access	Reset
0x0000	T2VAL0	Wake-up timer current count value (LSB) register	Read	0x0000
0x0004	T2VAL1	Wake-up timer current count value (MSB) register	Read	0x0000
0x0008	T2CON	Wake-up timer control register	Read/write	0x0010
0x000C	T2EN	Wake-up timer enable register	Read/write	0x0000
0x0010	T2WUFA0	Wake-up timer Wake-Up Field A (LSB) register	Read/write	0x1FFF
0x0014	T2WUFA1	Wake-up timer Wake-Up Field A (MSB) register	Read/write	0x0000
0x0018	T2WUFB0	Wake-up timer Wake-Up Field B (LSB) register	Read/write	0x2FFF
0x001C	T2WUFB1	Wake-up timer Wake-Up Field B (MSB) register	Read/write	0x0000
0x0020	T2WUFC0	Wake-up timer Wake-Up Field C (LSB) register	Read/write	0x3FFF
0x0024	T2WUFC1	Wake-up timer Wake-Up Field C (MSB) register	Read/write	0x0000
0x0028	T2IEN	Wake-up timer interrupt enable register	Read/write	0x0000
0x002C	T2ISTA	Wake-up timer interrupt status register	Read	0x0000
0x0030	T2CLRI	Wake-up timer clear interrupts register	Write	0x0000
0x003C	T2CAP0	Wake-up timer capture event count (LSB) register	Read	0x0000
0x0040	T2CAP1	Wake-up timer capture event count (MSB) register	Read	0x0000

**Table 216. Watchdog Timer Memory Mapped Registers (Base Address 0x40002580)**

Offset	Name	Description	Access	Reset
0x0000	T3LD	Watchdog timer load value register	Read/write	0x0400
0x0004	T3VAL	Watchdog timer current count value register	Read	0x1000
0x0008	T3CON	Watchdog timer control register	Read/write	0x00E9
0x000C	T3CLRI	Watchdog timer clear interrupt register	Write	0x0000
0x0018	T3STA	Watchdog timer status register	Read	0x0020

**Table 217. High Voltage Peripheral Interface Memory Mapped Registers (Base Address 0x40003000)**

Offset	Name	Description	Access	Reset
0x0000	Reserved	User must not write to this location	Read	0x00
0x0004	HVCON	High voltage peripheral control interface command register (used with indirect high voltage register access method)	Read/write	0x0000
0x0008	Reserved	User must not write to this location	Read	0x00
0x000C	HVDAT	High voltage data register (used with indirect high voltage register access method)	Read/write	0x0800

**COMPLETE MMR LISTING****Table 217. High Voltage Peripheral Interface Memory Mapped Registers (Base Address 0x40003000) (Continued)**

Offset	Name	Description	Access	Reset
0x0010	HVDCFG0	Shadowed high voltage configuration register (used with direct high voltage register access method)	Read/write	0x00
0x0018	HVDSTA	Shadowed high voltage status register (used with direct high voltage register access method)	Read	0x00
0x001C	Reserved	User must not write to this location	Read	0x00

**Table 218. SPI Peripheral Memory Address (Base Address 0x40004000)**

Offset	Name	Description	Access	Reset
0x0000	SPISTA	SPI status register	Read	0x0000
0x0004	SPIRX	SPI receive register	Read	0x0000
0x0008	SPITX	SPI transmit register	Write	0x0000
0x000C	SPIDIV	SPI baud rate selection register	Read/write	0x0000
0x0010	SPICON	SPI configuration register	Read/write	0x0000

**Table 219. LIN Memory Mapped Registers (Base Address 0x40005000)**

Offset	Name	Description	Access	Reset
0x0000	LINCON	LIN control register	Read/write	0x1000
0x0004	LINIMSK	LIN interrupt mask register	Read/write	0x0000
0x0008	LINBR	LIN baud rate count register	Read/write	0x0326
0x000C	LINBRK	LIN break symbol count register	Read/write	0x0454
0x0014	LINSAMP	LIN sampling delay count register	Read/write	0x00
0x0018	LINFORCE	LIN force low register (forces LIN low while its value > 0)	Read/write	0x0000
0x001C	LINWUP	LIN wake-up register (minimum LIN bus low time needed to wake up the device)	Write	0x0007
0x0020	LINCNT	LIN byte count register (for the entire LIN frame)	Read/write	0x18
0x0024	LINTRDLY	LIN transceiver delay compensation register	Read/write	0x00
0x0028	LINSLP	LIN bus idle timeout register	Read/write	0x08
0x002C	LINLCNT	LIN last byte count register (number of bytes in the last response frame)	Read	0x0000
0x0030	LINSTA	LIN status register	Read/write	0x0000
0x0038	LINSTA1	LIN Status 1 register	Read	0x0000
0x003C	LINPID	LIN PID register	Read	0x00
0x0040	LIND1	LIN Data Byte 1 register for receive or transmit	Read/write	0x00
0x0044	LIND2	LIN Data Byte 2 register for receive or transmit	Read/write	0x00
0x0048	LIND3	LIN Data Byte 3 register for receive or transmit	Read/write	0x00
0x004C	LIND4	LIN Data Byte 4 register for receive or transmit	Read/write	0x00
0x0050	LIND5	LIN Data Byte 5 register for receive or transmit	Read/write	0x00
0x0054	LIND6	LIN Data Byte 6 register for receive or transmit	Read/write	0x00
0x0058	LIND7	LIN Data Byte 7 register for receive or transmit	Read/write	0x00
0x005C	LIND8	LIN Data Byte 8 register for receive or transmit	Read/write	0x00
0x0060	LINFCS	LIN frame checksum register	Read	0x00
0x0064	LINCCS	LIN current calculated checksum register	Read	0xFF
0x0068	LINNAD	LIN node ID address register	Read/write	0xFF
0x006C	LININAD	LIN initial node ID register	Read/write	0x00
0x0070	LINFID	LIN initial function ID register	Read/write	0x0000
0x0074	LINVID	LIN variant ID register	Read/write	0x0000
0x0078	LINSUPID	LIN supplier ID register	Read/write	0x00
0x007C	LINSID	LIN service ID register	Read/write	0x00

**Table 220. High Frequency Oscillator Calibration Memory Mapped Registers (Base Address 0x40005C00)**

Offset	Name	Description	Access	Reset
0x0000	LINCALCON	LIN calibration control register	Read/write	0x0000
0x001C	LINCALSTA	System calibration status register	Read	0x0000
0x0004	LINCALVAL0	User calibration value register (low precision mode)	Read/write	0x0000

**COMPLETE MMR LISTING****Table 220. High Frequency Oscillator Calibration Memory Mapped Registers (Base Address 0x40005C00) (Continued)**

Offset	Name	Description	Access	Reset
0x0008	LINCALVAL1	User calibration value register (high precision mode)	Read/write	0x0000
0x0020	LINCALVAL2	System calibration value register (low precision mode)	Read	0xFFFF
0x0024	LINCALVAL3	System calibration value register (high precision mode)	Read	0xFFFF
0x0014	LINCALMINL	Minimum control window register, Bits[15:0]	Read/write	0x0000
0x0018	LINCALMINH	Minimum control window register, Bits[18:16]	Read/write	0x0000
0x000C	LINCALMAXL	Maximum control window register, Bits[15:0]	Read/write	0x0000
0x0010	LINCALMAXH	Maximum control window register, Bits[18:16]	Read/write	0x0000
0x0028	LINCALLOCK	Calibration lock register	Read/write	0x0000

**Table 221. GPIO Port 0 Interface Memory Address (Base Address 0x40006000)**

Offset	Name	Description	Access	Reset
0x0000	GP0CON	GPIO configuration register	Read/write	0x0000
0x0004	GP0OEN	GPIO output enable register	Read/write	0x00
0x0008	GP0PUL	GPIO output pull-up enable register	Read/write	0x3F
0x000C	GP0OCE	GPIO open circuit enable register	Read/write	0x00
0x0014	GP0INR	GPIO input data register	Read	0xXX
0x0018	GP0OUT	GPIO data out register	Read/write	0x00
0x001C	GP0SET	GPIO data out set register	Write	0x00
0x0020	GP0CLR	GPIO data out clear register	Write	0x00
0x0024	GP0TGL	GPIO pin toggle register	Write	0x00

**Table 222. Reference Control Memory Address (Base Address 0x40008800)**

Offset	Name	Description	Access	Reset
0x0008	HRFCTRL	Internal 1.2 V reference control register	Read/write	0x0002
0x0024	IRFPD	Internal reference buffer power-down register	Read/write	0x0001

**Table 223. Low Frequency Oscillator Trim Memory Mapped Registers (Base Address 0x40009C00)**

Offset	Name	Description	Access	Reset
0x0000	TRMSTA	Low frequency oscillator calibration status register	Read	0x00
0x0004	TRMCON	Low frequency oscillator calibration control register	Read/write	0x00
0x0008	TRMMXC	Maximum calibration value register	Read	0x3F
0x000C	TRMMNC	Minimum calibration value register	Read/write	0x00
0x0010	TRMVAL	Oscillator trim value register	Read/write	0XX
0x0014	TRM32TGT	Low frequency oscillator target count register	Read/write	0x00
0x0018	TRM32CNT	Low frequency oscillator current count register	Read	0x00
0x001C	TRMUCTGT	UCLK target count register	Read/write	0x0000
0x0020	TRMUCTCNT	UCLK current count register	Read	0x0000

**Table 224. Flash Controller Memory Mapped Registers (Base Address 0x40018000)**

Offset	Name	Description	Access	Reset
0x0000	FEESTA	Flash memory status register	Read	0x00000000
0x0004	FEECON0	Flash memory command control register	Read/write	0x0010
0x0008	FEECMD	Flash memory command register	Read/write	0x0000
0x000C	FEEADR	Flash address keyhole register	Read/write	0x00000000
0x0010	FEEDATL	Flash data register (lower)	Read/write	0x00000000
0x0014	FEEDATH	Flash data register (upper)	Read/write	0x00000000
0x0018	FEEADR1L	Flash controller lower page address register	Read/write	0x00000000
0x001C	FEEADR1H	Flash controller upper page address register	Read/write	0x00000000
0x0020	FEEKEY	Flash controller key register	Write	0x0000
0x0028	FEEPROM	Program flash write protection register	Read/write	0xFFFFFFFF

**COMPLETE MMR LISTING****Table 224. Flash Controller Memory Mapped Registers (Base Address 0x40018000) (Continued)**

Offset	Name	Description	Access	Reset
0x002C	FEEPROD	Data flash write protection register	Read/write	0xFF
0x0030	FEEECC	Data flash ECC disable register	Read/write	0x00000000
0x0034	FEESIGN	Flash controller signature register	Read	0x00000000
0x0038	FEECON1	Serial wire control register	Read/write	0x0001
0x0040	FEEABORT	Flash controller write abort address register	Read	0x00000000
0x0048	FEEAENO	Flash controller abort enable register	Read/write	0x0000
0x0068	USERFAKEY0	USERFAKEY low register, Bits[31:0]	Read/write	0x00000000
0x006C	USERFAKEY1	USERFAKEY high register, Bits[63:32]	Read/write	0x00000000
0x0074	FEEPECC	Program flash address register for ECC error	Read	0x00000000
0x0078	FEEDECC	Data flash address register for ECC error	Read	0x00000000

**Table 225. ADC Memory Mapped Registers (Base Address 0x40030000)**

Offset	Name	Description	Access	Reset
0x0000	ADCSTA	ADC status register	Read	0x0000
0x0004	ADCMSKI	ADC interrupt mask register	Read/write	0x00
0x0008	ADCMDE	ADC mode register	Read/write	0x0003
0x000C	ADC0CON	ADC0 control register	Read/write	0x00000000
0x0010	ADC1CON	ADC1 control register	Read/write	0x00000000
0x0018	ADCFLT	ADC filter configuration register	Read/write	0x00000007
0x001C	ADCCFG	ADC configuration register	Read/write	0x00
0x0020	ADC0DAT	ADC0 result register	Read	0x00000001
0x0024	ADC1DAT	ADC1 result register	Read	0x00000001
0x0030	ADC0OF	ADC0 offset calibration register	Read/write	Calibration value
0x0034	ADC1OF	ADC1 offset calibration register	Read/write	Calibration value
0x0038	ADC2OF	ADC2 offset calibration register	Read/write	Calibration value
0x003C	ADC0GN	ADC0 gain calibration register	Read/write	Calibration value
0x0040	ADC1GN	ADC1 gain calibration register	Read/write	Calibration value
0x0044	ADC2GN	ADC2 gain calibration register	Read/write	Calibration value
0x0048	ADC0RCL	ADC0 result counter limit register	Read/write	0x0001
0x004C	ADC0RCV	ADC0 result counter value register	Read	0x0000
0x0050	ADCOTH	ADC0 comparator threshold register	Read/write	0x00000000
0x0054	ADCOTHC	ADC0 threshold counter limit register	Read/write	0x01
0x0058	ADCOTHV	ADC0 threshold counter value register	Read	0x00
0x005C	ADC0ACC	ADC0 accumulator register	Read	0x00000000
0x0060	ADC0ATH	ADC0 accumulator threshold register	Read/write	0x00000000

**Table 226. ARM Cortex-M3 Processor Registers and NVIC Registers**

Address	Analog Devices Header File Name	Description	Access
0xE000E004	ICTR	Shows the number of interrupt lines that the NVIC supports	Read
0xE000E010	STCSR	SYSTICK control and status register	Read/write
0xE000E014	STRVR	SYSTICK reload value register	Read/write
0xE000E018	STCVR	SYSTICK current value register	Read/write
0xE000E01C	STCR	SYSTICK calibration value register	Read
0xE000E100	ISER0	Set IRQ0 to IRQ13 enable	Read/write
0xE000E180	ICER0	Clear IRQ0 to IRQ13 enable	Read/write
0xE000E200	ISPR0	Set IRQ0 to IRQ13 pending	Read/write
0xE000E280	ICPR0	Clear IRQ0 to IRQ13 pending	Read/write
0xE000E300	IABR0	IRQ0 to IRQ13 active bits	Read/write
0xE000E400	IPR0	IRQ0 to IRQ3 priority	Read/write

**COMPLETE MMR LISTING****Table 226. ARM Cortex-M3 Processor Registers and NVIC Registers (Continued)**

Address	Analog Devices Header File Name	Description	Access
0xE000E404	IPR1	IRQ4 to IRQ7 priority	Read/write
0xE000E408	IPR2	IRQ8 to IRQ11 priority	Read/write
0xE000E40C	IPR3	IRQ12 to IRQ13 priority	Read/write
0xE000ED00	CPUID	CPUID base register	Read
0xE000ED04	ICSR	Interrupt control and status register	Read/write
0xE000ED08	VTOR	Vector table offset register	Read/write
0xE000ED0C	AIRCR	Application interrupt and reset control register	Read/write
0xE000ED10	SCR	System control register	Read/write
0xE000ED14	CCR	Configuration control register	Read/write
0xE000ED18	SHPR1	System Handlers Register 1	Read/write
0xE000ED1C	SHPR2	System Handlers Register 2	Read/write
0xE000ED20	SHPR3	System Handlers Register 3	Read/write
0xE000ED24	SHCSR	System handler control and state	Read/write
0xE000ED28	CFSR	Configurable fault status	Read/write
0xE000ED2C	HFSR	Hard fault status	Read/write
0xE000ED34	MMAR	Memory manage address	Read/write
0xE000ED38	BFAR	Bus fault address	Read/write
0xE000EF00	STIR	Software trigger interrupt register	Write

**ESD Caution**

**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

**Legal Terms and Conditions**

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners. Information contained within this document is subject to change without notice. Software or hardware provided by Analog Devices may not be disassembled, decompiled or reverse engineered. Analog Devices' standard terms and conditions for products purchased from Analog Devices can be found at: [http://www.analog.com/en/content/analog\\_devices\\_terms\\_and\\_conditions/fca.html](http://www.analog.com/en/content/analog_devices_terms_and_conditions/fca.html)