

DOCUMENT TYPE: TOP

DOCUMENT ID #: 04-4051

REVISION: AO-000

DOCUMENT TITLE: STANDARD QUANTITY ON REEL AND ORIENTATIO

EFFECTIVE DATE: 07/16/2024

EXPIRATION DATE:

CHANGE NUMBER: 1212716

ORIGINATOR: Arthit Suree

REASON FOR CHANGE:

Revise orientation quadrant of Package Code F142A3 to match with EIA standard

CHANGE DETAILS

FROM										TO																																																					
REV AN										REV AO Revise package code F142A3 at 7.4.14. For FC/FC2 QFN Packages																																																					
<table border="1" style="width: 100%; border-collapse: collapse; font-size: 8px;"> <thead> <tr style="background-color: #00a651; color: white;"> <th rowspan="2">Package</th> <th rowspan="2">Package Code</th> <th rowspan="2">Pin Count</th> <th colspan="2">Carrier Tape</th> <th colspan="2">Quantity per Reel</th> <th rowspan="2">Pin 1 Orientation</th> <th rowspan="2">EIA481-F Standard</th> </tr> <tr style="background-color: #00a651; color: white;"> <th>Width</th> <th>Pitch</th> <th>7"</th> <th>13"</th> </tr> </thead> <tbody> <tr> <td>FC2QFN 2.5x3</td> <td>F142A3</td> <td>14</td> <td>12mm</td> <td>8mm</td> <td>N/A</td> <td>2500</td> <td>Quad 1 (Figure 6)</td> <td>Quad 1</td> </tr> </tbody> </table>										Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard	Width	Pitch	7"	13"	FC2QFN 2.5x3	F142A3	14	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1	<table border="1" style="width: 100%; border-collapse: collapse; font-size: 8px;"> <thead> <tr style="background-color: #00a651; color: white;"> <th rowspan="2">Package</th> <th rowspan="2">Package Code</th> <th rowspan="2">Pin Count</th> <th colspan="2">Carrier Tape</th> <th colspan="2">Quantity per Reel</th> <th rowspan="2">Pin 1 Orientation</th> <th rowspan="2">EIA481-F Standard</th> </tr> <tr style="background-color: #00a651; color: white;"> <th>Width</th> <th>Pitch</th> <th>7"</th> <th>13"</th> </tr> </thead> <tbody> <tr> <td>FC2QFN 2.5x3</td> <td>F142A3</td> <td>14</td> <td>12mm</td> <td>8mm</td> <td>N/A</td> <td>2500</td> <td>Quad 2 (Figure 6)</td> <td>Quad 2</td> </tr> </tbody> </table>										Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard	Width	Pitch	7"	13"	FC2QFN 2.5x3	F142A3	14	12mm	8mm	N/A	2500	Quad 2 (Figure 6)	Quad 2
Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard																																																							
			Width	Pitch	7"	13"																																																									
FC2QFN 2.5x3	F142A3	14	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1																																																							
Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard																																																							
			Width	Pitch	7"	13"																																																									
FC2QFN 2.5x3	F142A3	14	12mm	8mm	N/A	2500	Quad 2 (Figure 6)	Quad 2																																																							

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL

DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
1



TABLE OF CONTENTS

PURPOSE	3
SCOPE	3
TERMS AND DEFINITIONS	3
APPLICABLE DOCUMENTS	3
EQUIPMENT AND MATERIALS	3
GENERAL REQUIREMENTS.....	3
SAFETY.....	3
HUMIDITY	3
PACKAGING REQUIREMENTS	3
STANDARD QUANTITY PER PACKAGE	4
TAPE AND REEL ORIENTATION.....	34
ACCEPTANCE	40
DISPOSITION OF MATERIAL	40
DATA RECORDING	40
MAINTENANCE	40
APPENDICES.....	40
APPENDIX 12.1 List of TQFN 3x3 Using 12mm Carrier Tape Width	41
REVISION HISTORY	44

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL		
DOCUMENT I.D. 04-4051	REVISION AO	PAGE 2



7.4. STANDARD QUANTITY PER PACKAGE:

7.4.1. For SOIC (0.150") Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
SOIC (0.150")	S14	14	16mm	8mm	N/A	2500	Quad 1 (Figure 2)	Quad 1
SOIC (0.150")	S16	16	16mm	8mm	N/A	2500	Quad 1 (Figure 2)	Quad 1
SOIC (0.150")	S8	8	12mm	8mm	N/A	2500	Quad 1 (Figure 2)	Quad 1

7.4.2. For SOIC (0.300") Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
SOIC (0.300")	W16	16	16mm	12mm	N/A	1000	Quad 1 (Figure 2)	Quad 1
SOIC (0.300")	W18	18	24mm	16mm	N/A	1000	Quad 1 (Figure 2)	Quad 1
SOIC (0.300")	W20	20	24mm	12mm	N/A	1000	Quad 1 (Figure 2)	Quad 1
SOIC (0.300")	W24	24	24mm	12mm	N/A	1000	Quad 1 (Figure 2)	Quad 1
SOIC (0.300")	W28	28	24mm	12mm	N/A	1000	Quad 1 (Figure 2)	Quad 1
SOIC (0.300")	W8MS+5,6,7	8	24mm	16mm	N/A	1000	Quad 1 (Figure 2)	Quad 1

7.4.3. For other SOIC Packages (0.208" and 0.330")

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
SOIC (0.330")	F28	28	24mm	20mm	N/A	1000	Quad 1 (Figure 2)	Quad 1
SOIC (0.208")	W8/W8MK/W8MS+1	8	16mm	12mm	N/A	2000	Quad 1 (Figure 2)	Quad 1

7.4.4. For QSOP (0.150") Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
QSOP (0.150")	E16	16	12mm	8mm	N/A	2500	Quad 1 (Figure 2)	Quad 1
QSOP (0.150")	E20	20	16mm	8mm	N/A	2500	Quad 1 (Figure 2)	Quad 1
QSOP (0.150")	E24	24	16mm	8mm	N/A	2500	Quad 1 (Figure 2)	Quad 1
QSOP (0.150")	E28	28	16mm	8mm	N/A	2500	Quad 1 (Figure 2)	Quad 1

7.4.5. For SSOP Packages (0.209" and 0.300")

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
SSOP (0.209")	A14	14	16mm	12mm	N/A	2000	Quad 1 (Figure 2)	Quad 1
SSOP (0.209")	A16	16	16mm	12mm	N/A	2000	Quad 1 (Figure 2)	Quad 1
SSOP (0.209")	A20	20	16mm	12mm	N/A	2000	Quad 1 (Figure 2)	Quad 1
SSOP (0.209")	A24	24	16mm	12mm	N/A	2000	Quad 1 (Figure 2)	Quad 1
SSOP (0.209")	A28	28	16mm	12mm	N/A	2000	Quad 1 (Figure 2)	Quad 1
SSOP (0.300")	A36	36	24mm	12mm	N/A	1000	Quad 1 (Figure 2)	Quad 1
SSOP (0.300")	A44	44	24mm	12mm	N/A	1000	Quad 1 (Figure 2)	Quad 1
SSOP (0.300")	A48	48	24mm	12mm	N/A	1000	Quad 1 (Figure 2)	Quad 1

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
4

7.4.6. For TSSOP Packages (0.173" and 0.240")

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
TSSOP (0.173")	H8	8	12mm	8mm	N/A	2500	Quad 1 (Figure 2)	Quad 1
TSSOP (0.173")	U14	14	16mm	8mm	N/A	2500	Quad 1 (Figure 2)	Quad 1
TSSOP (0.173")	U16	16	16mm	8mm	N/A	2500	Quad 1 (Figure 2)	Quad 1
TSSOP (0.173")	U20	20	16mm	8mm	N/A	2500	Quad 1 (Figure 2)	Quad 1
TSSOP (0.173")	U24	24	16mm	8mm	N/A	2500	Quad 1 (Figure 2)	Quad 1
TSSOP (0.173")	U28	28	16mm	8mm	N/A	2500	Quad 1 (Figure 2)	Quad 1
TSSOP (0.173")	U38	38	16mm	8mm	N/A	2500	Quad 1 (Figure 2)	Quad 1
TSSOP (0.240")	U48	48	24mm/ 16mm	12mm/ 8mm	N/A	2500	Quad 1 (Figure 2)	Quad 1
TSSOP (0.240")	U56	56	24mm	12mm	N/A	2500	Quad 1 (Figure 2)	Quad 1

7.4.7. For TSOP Packages (8 x 13.4)

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
TSOP (8x13.4)	Z28	28	24mm	12mm	N/A	2500	Quad 1 (Figure 2)	Quad 1

7.4.8. For TSOC Packages (0.150")

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
TSOC (0.150")	D6	6	12mm	8mm	N/A	4000	Quad 1 (Figure 2)	Quad 1

7.4.9. For MSOP Packages (0.118")

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
MSOP (0.118")	U8	8	12mm	8mm	N/A	2500/3000	Quad 1 (Figure 2)	Quad 1
MSOP (0.118")	U10	10	12mm	8mm	N/A	2500/3000	Quad 1 (Figure 2)	Quad 1

7.4.10. For QFN Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
QFN 3x3	G833	8	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 3x3	G1233	12	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 3x3	G1633	16	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 4x4	G1244	12	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 4x4	G1644	16	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 4x4	G2044	20	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 4x4	G2444	24	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 5x5	G1655	16	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 5x5	G2055	20	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 5x5	G2855	28	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 5x5	G3255	32	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 5x5	G3655	36	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL

DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
5



Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
QFN 5x6	G2356	23	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
QFN 6x6	G3666	36	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 6x6	G4066	40	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 6x6	G4866	48	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 7x7	G3277	32	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 7x7	G4477	44	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 7x7	G4877	48	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 7x7	G5677	56	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 8x8	G4288	42	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 8x8	G5288	52	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 8x8	G5688	56	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 8x8	G6888	68	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 9x9	G6499	64	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 10x10	G6800	68	24mm	16mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
QFN 4x4	Q2044	20	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2

7.4.11. For Extreme and Ultra TQFN Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
Extreme TQFN 3x3	E1633	16	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
Ultra TQFN 1.4x1.8	V101A1	10	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 1/2
Ultra TQFN 2.1x1.6	V101A2	10	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 1/2
Ultra TQFN 2.5x2.5	V162A2	10	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
Ultra TQFN 3.5x4.5	V283A4	28	12mm	8mm	N/A	5000	Quad 1 (Figure 6)	Quad 1/2
Ultra TQFN 6x6	V4866	48	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
CPQFN 4x4	CP2844	28	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2

7.4.12. For Thin QFN Packages

Package/2	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
Thin QFN 3x3	T1233	12	8mm/12mm*	4mm/8mm*	2500	2500*	Quad 1 (Figure 6)	Quad 2
Thin QFN 3x3	T1633	16	8mm/12mm*	4mm/8mm*	2500	2500*	Quad 1 (Figure 6)	Quad 2
Thin QFN 3x3	TQ833	8	8mm/12mm*	4mm/8mm*	2500	2500*	Quad 1 (Figure 6)	Quad 2
Thin QFN 3x3	T2433	24	8mm/12mm*	4mm/8mm*	2500	2500*	Quad 1 (Figure 6)	Quad 2
* For thin 3x3 TQFN devices requiring 12mm tape width, 8mm pitch, and 13" reel diameter, please refer to appendix 12.1								
Thin QFN 3.5x3.5	T243A3	24	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 3.5x3.5	T203A3	20	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
6

Package/2	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
Thin QFN 3.5x5.5	T283555	28	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
Thin QFN 3.5x5.5	T283A5	28	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1
Thin QFN 3.5x9	T423590	42	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
Thin QFN 4x4	T1244	12	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 4x4	T1644	16	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 4x4	T2044	20	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 4x4	T2444	24	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 4x4	T2844	28	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 4x4	T3244	32	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 4x5	T2045	20	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
Thin QFN 4x5	T2445	24	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
Thin QFN 4x5	T3645	36	12mm	8mm	N/A	2500	Quad 2 (Figure 6)	Quad 1/2
Thin QFN 5x5	T1655	16	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 5x5	T2055	20	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 5x5	T2855	28	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 5x5	T3255	32	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 5x5	T4055	40	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 5x6	T3256	32	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
Thin QFN 5x7	T3857	38	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
Thin QFN 5x11	T56511	56	24mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
Thin QFN 6x6	T3666	36	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 6x6	T4066	40	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 6x6	T4866	48	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 6x8	T4868	48	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
Thin QFN 7x7	T3277	32	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 7x7	T4477	44	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 7x7	T4877	48	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 7x7	T5677	56	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 8x6	T4886	48	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
Thin QFN 8x8	T5688	56	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 8x8	T6888	68	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 9x9	T6499	64	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 10x10	T6800	68	24mm	16mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Thin QFN 11x11	T8011	80	24mm	16mm	N/A	2500	Quad 1 (Figure 6)	Quad 2

7.4.13. For Sawn QFN Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
Sawn QFN 3x3	K2033	20	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Sawn QFN 4x4	K2844	28	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Sawn QFN 4x4	K3244	32	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Sawn QFN 5x5	K2855	28	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Sawn QFN 5x5	K3255	32	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Sawn QFN 5x6	K3656	36	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
7

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
Sawn QFN 6x6	K3666	36	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Sawn QFN 6x6	K4066	40	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Sawn QFN 6x6	K4866	48	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Sawn QFN 7x7	K3777	37	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Sawn QFN 7x7	K4877	48	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Sawn QFN 8x8	K4788	47	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Sawn QFN 8x8	K5688	56	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Sawn QFN 9x9	K6499	64	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
Sawn QFN 10.5x6.5	K7610A6	76	24mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
Sawn QFN 11x11	K8011	80	24mm	16mm	N/A	2500	Quad 1 (Figure 6)	Quad 2

7.4.14. For FC/FC2 QFN Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
FCQFN 2.7x4.2	P122A4	12	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 2.7x6.2	P162A6	16	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 3.1x2.85	P133B2	13	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 3.25x2.5	P133A2	13	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 3.25x3.5	P153A3	15	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 3.25x3.75	P173A3	17	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 3.25x4.5	P173A4	17	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 3.25x6.5	P213A6	21	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 3.25x8.5	P223A8	22	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 3.25x8.75	P223B8	22	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 3.5x8.1	P203A8	20	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 3.75x3.5	P153B3	15	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 3.75x4	P123A4	12	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 3.75x4	P163B4	16	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 3.75x5	P143A5	14	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 3.75x5	P183A5	18	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 3.75x6	P163A6	16	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 3.75x6	P203A6	20	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 4x4.5	P94A4	9	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 4x4.5	P174A4	17	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 4x4.5	P184A4	18	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 4X5	P1845	18	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 4x5.5	P194A5	19	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 4x6.5	P214A6	21	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 4x6.5	P224A6	22	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 4.15x6	P104A6	10	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 4.15x6	P154A6	15	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 4.15x6	P174A6	17	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 4.15x8	P154A8	15	24mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
8

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
FCQFN 4.15x8.75	P164A8	16	24mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 4.15x9	P154A9	15	24mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 4.15x9	P234A9	23	24mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 4.5x4.5	P194A4	19	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 4.5x5.5	P214A5	21	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 4.5x6.5	P234A6	23	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 5x6.5	P105A6	10	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 5.8x3	P105A3	10	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FCQFN 7.5x5.25	P197A5	19	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 1.25x1.25	F41A1	4	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
FC2QFN 1.25x1.75	F61A1	6	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 2x2	F102A2	10	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
FC2QFN 2.5x2	F112A2	11	8mm	4mm	2500	N/A	Quad 2 (Figure 6)	Quad 1/2
FC2QFN 2.5x2.5	F122A2	12	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
FC2QFN 2.5x2.5	F122B2	12	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
FC2QFN 2.5x2.5	F142A2	14	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
FC2QFN 2.5x3	F142A3	14	12mm	8mm	N/A	2500	Quad 2 (Figure 6)	Quad 2
FC2QFN 2.5x3.5	F182B3	18	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 3x2.5	F182A3	18	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 3x3	F103A3	10	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
FC2QFN 3x3	F153B3	15	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
FC2QFN 3x3	F163A3	16	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
FC2QFN 3x3	F223A3	22	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
FC2QFN 3x3	F243A3	24	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
FC2QFN 3x3.5	F173C3	17	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 3x3.5	F183A3	18	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 3x4	F173B4	17	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 3x4	F2434	24	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 3.05x7.25	F123A7	12	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 3.5x3.5	F143A3	14	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
FC2QFN 3.5x3.5	F163A3	16	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
FC2QFN 3.5x3.75	F153A3	15	12mm	8mm	N/A	2500	Quad 2 (Figure 6)	Quad 1/2
FC2QFN 3.5x3.75	F173A3	17	12mm	8mm	N/A	2500	Quad 2 (Figure 6)	Quad 1/2
FC2QFN 3.5x3.75	F173B3	17	12mm	8mm	N/A	2500	Quad 2 (Figure 6)	Quad 1/2
FC2QFN 3.5x4	F173A4	17	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 3.5x4.6	F213A4	21	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 3.5x5	F173A5	17	12mm	8mm	N/A	2500	Quad 2 (Figure 6)	Quad 1/2
FC2QFN 3.5x5	F193A5	19	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 3.5x5	F203A5	20	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 3.5x5	F213A5	21	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 3.5x5	F223A5	22	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 3.5x6	F213A6	21	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 3.5x6	F273A6	27	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 3.25x9.25	F183A9	18	24mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 4x4	F164A4	16	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
FC2QFN 4x4	F234A4	23	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
9

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
FC2QFN 4x4	F304A4	30	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
FC2QFN 4x4	F304B4	30	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
FC2QFN 4x5	F174A5	17	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 4x6	F3446	34	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 4x8	F3448	34	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 4x10.5	F354A10	35	24mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 4x10.75	F174A10	17	24mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 4x10.75	F314A10	31	24mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 4.25x4.25	F224A4	22	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
FC2QFN 4.5x5.75	F234A5	23	16mm	12mm	N/A	2500	Quad 2 (Figure 6)	Quad 1/2
FC2QFN 5x5	F1855	15	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
FC2QFN 5x5	F295A5	29	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
FC2QFN 5x6	F415A6	41	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 6x6	F276A6	27	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
FC2QFN 6x6	F306A6	30	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
FC2QFN 6x6	F486A6	48	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
FC2QFN 6.5x3.5	F286A3	28	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 6.55x4.3	F164A6	16	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 7.4x3.25	F123A7	12	24mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 7.75x3.5	F183A7	18	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 7.75x3.5	F183B7	18	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 7.75x3.5	F283A7	28	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 7.75x3.5	F327A3	32	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 8.5x5	F168A5	16	16mm	12mm	N/A	1000	Quad 1 (Figure 6)	Quad 1/2
FC2QFN 10x4.25	F364A10	36	24mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2

7.4.15. Routable QFN Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-E Standard
			Width	Pitch	7"	13"		
RQFN 10x6	R70610	70	16mm	12mm	N/A	2500	Quad 2 (Figure 6)	Quad 1/2

7.4.16. WL – QFN Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
WL-QFN 5x3.2	A253A5	25	12mm	8mm	N/A	2500	Quad 2 (Figure 6)	Quad 1/2
WL-QFN 3.56x2.1	A282A3	28	12mm	8mm	N/A	2500	Quad 2 (Figure 6)	Quad 1/2
WL-QFN 5.39x3.87	A253A5	25	12mm	8mm	N/A	2500	Quad 2 (Figure 6)	Quad 1/2
WL-QFN 3.85x3.85	A313A3	31	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL

DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
10



7.4.17. For Multi Row QFN (MRQ) Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
MRQ 7x7	GM7677	76	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
MRQ 8x8	GM8688	86	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
MRQ 9x9	GM9299	92	16mm	12mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
MRQ 10x10	GM4600	46	24mm	16mm	N/A	2500	Quad 1 (Figure 6)	Quad 2
MRQ 11x11	G14011	140	24mm	16mm	N/A	2000	Quad 1 (Figure 6)	Quad 2

7.4.18. For uDFN Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
uDFN 2x2	V82A2	8	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
uDFN 1.4x1.8	V101A1CN	10	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 1/2
uDFN 2.5x2.5	V162A2	16	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
uDFN 1.5x1	L611	6	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 1/2
uDFN 2x2	L1022	10	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
uDFN 2x2	L822	8	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
uDFN 2x2	L622	6	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
uDFN 3x3	L633	6	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2

7.4.19. For Thin DFN (TDFN) Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
TDFN 2x2	T622	6	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
TDFN 2x2	T822	8	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
TDFN 2x3	T823	8	8mm	4mm	2500	N/A	Quad 2 (Figure 6)	Quad 1/2
TDFN 2x3	T1623	16	8mm	4mm	2500	N/A	Quad 2 (Figure 6)	Quad 1/2
TDFN 2.5x2	T102A2	10	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 1/2
TDFN 3x2	T1032	10	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 1/2
TDFN 3x3	T633	6	8mm/12mm*	4mm/8mm*	2500	2500*	Quad 1 (Figure 6)	Quad 2
TDFN 3x3	T833	8	8mm/12mm*	4mm/8mm*	2500	2500*	Quad 1 (Figure 6)	Quad 2
TDFN 3x3	T1033	10	8mm/12mm*	4mm/8mm*	2500	2500*	Quad 1 (Figure 6)	Quad 2
TDFN 3x3	TD1233	12	8mm/12mm*	4mm/8mm*	2500	2500*	Quad 1 (Figure 6)	Quad 2
TDFN 3x3	T1433	14	8mm/12mm*	4mm/8mm*	2500	2500*	Quad 1 (Figure 6)	Quad 2
* For 3x3 Thin DFN devices requiring 12mm tape width, 8mm pitch, and 13" reel diameter, please refer to appendix 12.1								
TDFN 3x3.5	T143A3	14	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
TDFN 3x5	T1435	14	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
TDFN 4x3	T834	8	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
TDFN 4x3	T1034	10	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
TDFN 4x3	T1434	14	12mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2
TDFN 8x4	T2848	28	16mm	8mm	N/A	2500	Quad 1 (Figure 6)	Quad 1/2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL

DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
11



7.4.20. For other DFN (DFN, Opto TDFN, Ultra TDFN) Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
DFN 3x3	G833	8	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
OTDFN 2x2	D622	6	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
OTDFN 3x3	D1433	14	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2
Ultra TDFN 3x3	V1233	12	8mm	4mm	2500	N/A	Quad 1 (Figure 6)	Quad 2

7.4.21. For LGA Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
LGA 2.5x2.5	L142A2	14	12mm	8mm	N/A	2500	Quad 1 (Figure 7)	Quad 1
LGA 3x3	L1633	16	12mm	8mm	N/A	2500	Quad 1 (Figure 7)	Quad 1
LGA 3x3	L2433	24	12mm	8mm	N/A	2500	Quad 1 (Figure 7)	Quad 1
LGA 4x13	L6043FM	60	24mm	8mm	N/A	2500	Quad 1 (Figure 7)	Quad 1/2
LGA 5x5	L1055	10	16mm	8mm	N/A	2500	Quad 1 (Figure 7)	Quad 1
LGA 5x6	L3656	36	16mm	8mm	N/A	2500	Quad 1 (Figure 7)	Quad 1/2
LGA 6.5x5.5	L186A5	18	16mm	8mm	N/A	2500	Quad 1 (Figure 7)	Quad 1/2
LGA 6.5x5.5	L226A5	22	16mm	8mm	N/A	2500	Quad 1 (Figure 7)	Quad 1/2
LGA 7x7	L4877	48	16mm	12mm	N/A	2500	Quad 1 (Figure 7)	Quad 1
LGA 6.5x10	L286510	28	24mm	12mm	N/A	1500	Quad 2 (Figure 7)	Quad 1/2
LGA 9x9	L6499	64	16mm	12mm	N/A	2500	Quad 1 (Figure 7)	Quad 1
LGA 9x15	L32915	32	24mm	16mm	N/A	1500	Quad 2 (Figure 7)	Quad 1/2
LGA 9x15	L29915	29	24mm	16mm	N/A	1500	Quad 2 (Figure 7)	Quad 1/2
LGA 9x15	L33915	33	24mm	16mm	N/A	1500	Quad 2 (Figure 7)	Quad 1/2
LGA 9x9.5	L649A9	64	16mm	12mm	N/A	1500	Quad 2 (Figure 7)	Quad 1/2
LGA 9.35x11.5	L44119	44	24mm	16mm	N/A	1500	Quad 1 (Figure 7)	Quad 1/2
LGA 10x10	L8800	88	24mm	16mm	N/A	1500	Quad 2 (Figure 7)	Quad 1
LGA 11.5x8.6	L44811	44	24mm	16mm	N/A	1500	Quad 2 (Figure 7)	Quad 1/2
LGA 12x18	L421218	42	32mm	16m	N/A	500	Quad 2 (Figure 7)	Quad 1/2

7.4.22. For Optical LGA Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
oLGA 2.5x2	F102B2	10	8mm	4mm	2500	N/A	Quad 1 (Figure 7)	Quad 1/2
oLGA 2.8x5.6	F142A5	14	12mm	4mm	N/A	7500	Quad 1 (Figure 7)	Quad 1/2
oLGA 2.8x5.6	F142B5	14	12mm	4mm	N/A	7500	Quad 1 (Figure 7)	Quad 1/2
oLGA 3.3x5.6	F143A5	14	12mm	8mm	N/A	5000	Quad 1 (Figure 7)	Quad 1/2
oLGA 2.8x4.3	F182A4	18	12mm	8mm	N/A	3500	Quad 1 (Figure 7)	Quad 1/2
oLGA 3.3x5.6	F143B5	14	12mm	8mm	N/A	5000	Quad 1 (Figure 7)	Quad 1/2
oLGA 3.3x5.6	F143C5	14	12mm	8mm	N/A	5000	Quad 1 (Figure 7)	Quad 1/2
oLGA 3.3x5.6	F143D5	14	12mm	8mm	N/A	5000	Quad 1 (Figure 7)	Quad 1/2
oLGA 3.3x5.6	F143E5	14	12mm	8mm	N/A	5000	Quad 1 (Figure 7)	Quad 1/2
oLGA 3.3x5.6	F203B5	20	12mm	8mm	N/A	5000	Quad 1 (Figure 7)	Quad 1/2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
oLGA 3.3x5.6	F223A5	22	12mm	8mm	N/A	5000	Quad 1 (Figure 7)	Quad 1/2
oLGA 3.3x5.6	F223B5	22	12mm	8mm	N/A	5000	Quad 1 (Figure 7)	Quad 1/2
oLGA 3.3x5.6	F223C5	22	12mm	8mm	N/A	5000	Quad 1 (Figure 7)	Quad 1/2
oLGA 3.3x5.6	F223D5	22	12mm	8mm	N/A	5000	Quad 1 (Figure 7)	Quad 1/2
oLGA 3.3x5.6	F143A5	14	12mm	8mm	N/A	5000	Quad 1 (Figure 7)	Quad 1/2
oLGA 4x4.5	F204A4	20	12mm	8mm	N/A	5000	Quad 1 (Figure 7)	Quad 1/2
oLGA 4.1x4.5	F384A4	38	12mm	8mm	N/A	5000	Quad 1 (Figure 7)	Quad 1/2
oLGA 4.3x2.9	F142A4	14	12mm	8mm	N/A	5000	Quad 1 (Figure 7)	Quad 1/2
oLGA 4.55x3.8	F83A4	8	12mm	8mm	N/A	5000	Quad 1 (Figure 7)	Quad 1/2
oLGA 5.6x2	F142B5	14	12mm	4mm	N/A	7500	Quad 1 (Figure 7)	Quad 1/2
oLGA 5.6x2.8	F122A5	12	12mm	4mm	N/A	7500	Quad 1 (Figure 7)	Quad 1/2
oLGA 5.6x2.8	F142D5	14	12mm	4mm	N/A	7500	Quad 1 (Figure 7)	Quad 1/2
oLGA 7.4x3.9	F143A7	14	16mm	8mm	N/A	2500	Quad 1 (Figure 7)	Quad 1/2
oLGA 7.4x3.9	F143B7	14	16mm	8mm	N/A	2000	Quad 1 (Figure 7)	Quad 1/2
oLGA 7.4x3.9	F143C7	14	16mm	8mm	N/A	2500	Quad 1 (Figure 7)	Quad 1/2
oLGA 7.4x3.9	F143D7	14	16mm	8mm	N/A	2000	Quad 1 (Figure 7)	Quad 1/2
oLGA 7.4x3.9	F143E7	14	16mm	8mm	N/A	2500	Quad 1 (Figure 7)	Quad 1/2
oLGA 7.4x3.9	F143G7	14	16mm	8mm	N/A	2000	Quad 1 (Figure 7)	Quad 1/2
oLGA 7x3.5	F143H7	14	16mm	8mm	N/A	3500	Quad 1 (Figure 7)	Quad 1/2

7.4.23. For Thin and Ultra Thin LGA and FCLGA Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
FCLGA / Thin LGA 2x2	L1022	10	8mm	4mm	2500	N/A	Quad 1 (Figure 7)	Quad 1
FCLGA 3x4	L2434	24	12mm	8mm	N/A	2500	Quad 1 (Figure 7)	Quad 1/2
FCLGA 4x5	L3045	30	12mm	8mm	N/A	2500	Quad 1 (Figure 7)	Quad 1/2
FCLGA 4x6	L3446	34	16mm	12mm	N/A	2500	Quad 1 (Figure 7)	Quad 1/2
FCLGA 4.25x10	L364A10	36	24mm	16mm	N/A	2500	Quad 1 (Figure 7)	Quad 1/2
FCLGA 5x6	L3756	37	16mm	8mm	N/A	2500	Quad 1 (Figure 7)	Quad 1/2
FCLGA 6x6	L4866	48	16mm	12mm	N/A	2500	Quad 1 (Figure 7)	Quad 1
Thin LGA 4x6.5	L344A6	34	16mm	8mm	N/A	2500	Quad 1 (Figure 7)	Quad 1/2
Thin LGA 5x5	L6455	64	12mm	8mm	N/A	2500	Quad 1 (Figure 7)	Quad 1
Thin LGA 6x6	L1266	12	16mm	12mm	N/A	2500	Quad 1 (Figure 7)	Quad 1
Thin LGA 6x6	L8466	84	16mm	12mm	N/A	2500	Quad 1 (Figure 7)	Quad 1
Thin LGA 7x7	L4877	48	16mm	12mm	N/A	2500	Quad 1 (Figure 7)	Quad 1
Thin LGA 7.5x7	L487A7	48	16mm	12mm	N/A	2500	Quad 1 (Figure 7)	Quad 1/2
LGA 8x8	L7288	72	16mm	12mm	N/A	2500	Quad 1 (Figure 7)	Quad 1
Thin LGA 10x10	L321010	32	24mm	16mm	N/A	2500	Quad 1 (Figure 7)	Quad 1
Ultra Thin LGA 1.5x1	Y61A1	6	8mm	4mm	2500	N/A	Quad 1 (Figure 7)	Quad 1/2
Ultra Thin LGA 2x2	Y102A2	10	8mm	4mm	2500	N/A	Quad 1 (Figure 7)	Quad 1

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
13

7.4.24. For LQFP / TQFP Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
L/TQFP 14x14	C100	100	24mm	20mm	N/A	250	Quad 1 (Figure 4)	Quad 2
LQFP 14x14	C120	120	24mm	20mm	N/A	250	Quad 1 (Figure 4)	Quad 2
L/TQFP 14x14	C128	128	24mm	20mm	N/A	250	Quad 1 (Figure 4)	Quad 2
L/TQFP 7x7	C32	32	16mm	12mm	N/A	2000	Quad 1 (Figure 4)	Quad 2
L/TQFP 7x7	C48	48	16mm	12mm	N/A	2000	Quad 1 (Figure 4)	Quad 2
TQFP 10x10	C44	44	24mm	16mm	N/A	750	Quad 1 (Figure 4)	Quad 2
LQFP 10x10	C52	52	24mm	16mm	N/A	750	Quad 1 (Figure 4)	Quad 2
L/TQFP 10x10	C64	64	24mm	16mm	N/A	750	Quad 1 (Figure 4)	Quad 2
LQFP 12x12	C76	76	24mm	20mm	N/A	1000	Quad 2 (Figure 4)	Quad 2
TQFP 12x12	C80	80	24mm	20mm	N/A	1000	Quad 1 (Figure 4)	Quad 2
LQFP 14x20	C128L	128	44mm	24mm	N/A	500	Quad 1 (Figure 4)	Quad 1
L/TQFP 20x20	C144	144	32mm	24mm	N/A	750	Quad 1 (Figure 4)	Quad 2
TQFP 5x5	H32	32	16mm	12mm	N/A	2500	Quad 1 (Figure 4)	Quad 2

7.4.25. For MQFP Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
MQFP 10x10	M44	44	24mm	24mm	N/A	500	Quad 1 (Figure 4)	Quad 2
MQFP 14x20	M80	80	44mm	32mm	N/A	250	Quad 1 (Figure 4)	Quad 2
MQFP 14x20	M100	100	44mm	32mm	N/A	250	Quad 1 (Figure 4)	Quad 2
MQFP 28x28	M144	144	44mm	32mm	N/A	250	Quad 1 (Figure 4)	Quad 2

7.4.26. For PLCC Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
PLCC 8.97x8.97	Q20	20	16mm	12mm	N/A	1000	Quad 1-2 (Figure 4)	Quad 1-2
PLCC 11.48x11.48	Q28	28	24mm	16mm	N/A	500	Quad 1-2 (Figure 4)	Quad 1-2
PLCC 11.51x11.51	Q28	28	24mm	16mm	N/A	500	Quad 1-2 (Figure 4)	Quad 1-2
PLCC 11.46x14	Q32	32	24mm	16mm	N/A	500	Quad 1-2 (Figure 4)	Quad 1-2
PLCC 16.59x16.59	Q44	44	32mm	24mm	N/A	500	Quad 1-2 (Figure 4)	Quad 1-2
PLCC 19.2x19.2	Q52	52	32mm	24mm	N/A	250	Quad 1-2 (Figure 4)	Quad 1-2
PLCC 24.3x24.3	Q68	68	44mm	32mm	N/A	250	Quad 1-2 (Figure 4)	Quad 1-2

7.4.27. For BGA Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
BGA 4x4	X16	16	12mm	8mm	N/A	2500	Quad 1 (Figure 4)	Quad 1
BGA 5x5	X25	25	12mm	8mm	N/A	2500	Quad 1 (Figure 4)	Quad 1
BGA 5.9x5.9	X495A5	49	16mm	12mm	N/A	1000	Quad 1 (Figure 4)	Quad 1
BGA 6x6	X2466	24	16mm	12mm	N/A	1000	Quad 1 (Figure 4)	Quad 1
BGA 6x5.35	X07265	26	12mm	8mm	N/A	2500	Quad 2 (Figure 7)	Quad 1/2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
14

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
BGA 6.8x6.2	X906A6	90	16mm	12mm	N/A	2500	Quad 1 (Figure 4)	Quad 1/2
BGA 7x7	X49	49	16mm	12mm	N/A	1500	Quad 1 (Figure 4)	Quad 1
BGA 7x7	X4977	49	16mm	12mm	N/A	2000	Quad 1 (Figure 4)	Quad 1
BGA 7x7	X6477	64	16mm	12mm	N/A	2000	Quad 1 (Figure 4)	Quad 1
BGA 7x7	X12077	120	16mm	12mm	N/A	2000	Quad 1 (Figure 4)	Quad 1
BGA 7x7	X19677	196	16mm	12mm	N/A	2000	Quad 1 (Figure 4)	Quad 1
BGA 7x14	B1271A7	127	24mm	12mm	N/A	2000	Quad 1 (Figure 4)	Quad 1/2
BGA 8x8	X8188	81	16mm	12mm	N/A	2500	Quad 1 (Figure 4)	Quad 1
BGA 8x8	X12188	121	16mm	12mm	N/A	2500	Quad 1 (Figure 4)	Quad 1
BGA 8.6x7.7	X767A8	76	16mm	12mm	N/A	2500	Quad 2 (Figure 4)	Quad 1/2
BGA 9x9	X100	100	16mm	12mm	N/A	2000	Quad 1 (Figure 4)	Quad 1
BGA 9x9	X32499	324	16mm	12mm	N/A	2000	Quad 1 (Figure 4)	Quad 1
BGA 9x9	X8899	88	16mm	12mm	N/A	2000	Quad 1 (Figure 4)	Quad 1
BGA 9x9	X16999	169	16mm	12mm	N/A	2000	Quad 1 (Figure 4)	Quad 1
BGA 10x10	X100	100	24mm	16mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 10x10	X14400	144	24mm	16mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 10x10	X81	81	24mm	16mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 10x10	X8100	81	24mm	16mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 11x11	X100	100	24mm	16mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 11x11	X10011	100	24mm	16mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 11x11	X169	169	24mm	16mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 11x11	X16911	169	24mm	16mm	N/A	500	Quad 1 Figure 4)	Quad 1
BGA 11x11	X22811	228	24mm	16mm	N/A	500	Quad 1 Figure 4)	Quad 1
BGA 11.43x10.16	V36	36	24mm	16mm	N/A	750	Quad 1 (Figure 4)	Quad 1/2
BGA 12x12	X14422	144	24mm	16mm	N/A	2000	Quad 1 Figure 4)	Quad 1
BGA 12x12	X19222	192	24mm	16mm	N/A	2000	Quad 1 Figure 4)	Quad 1
BGA 13x13	X144	144	24mm	16mm	N/A	1500	Quad 1 (Figure 4)	Quad 1
BGA 14x14	X169	169	24mm	20mm	N/A	1500	Quad 1 (Figure 4)	Quad 1
BGA 14x14	X16944	169	24mm	20mm	N/A	1500	Quad 1 (Figure 4)	Quad 1
BGA 15x15	X196	196	24mm	20mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 15x15	X19655	196	24mm	20mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 15x15	X32455	324	24mm	20mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 15x15	X25655	256	24mm	20mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 16x16	X36166	361	24mm	20mm	N/A	1000	Quad 1 (Figure 4)	Quad 1
BGA 16x10	X22860	228	24mm	16mm	N/A	1500	Quad 2 (figure 4)	Quad 1/2
BGA 17x17	X25677	256	32mm	24mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 17x12	X28027	280	32m	16mm	N/A	2000	Quad 1 (Figure 4)	Quad 1
BGA 17x16	X38076	380	32m	16mm	N/A	2500	Quad 2 (Figure 4)	Quad 1/2
BGA 17x17	V144	256	32mm	24mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 17x17	X256	256	32mm	24mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 23x10	X33602	336	44mm	16mm	N/A	1500	Quad 3 (Figure 4)	Quad 1/2
BGA 23x23	V448	448	44mm	28mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 23x23	V484	484	44mm	28mm	N/A	500	Quad 1 (Figure 4)	Quad 1

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
15

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
BGA 25x25	H192	192	44mm	32mm	N/A	250	Quad 1 (Figure 4)	Quad 1
BGA 25x25	X492	492	44mm	32mm	N/A	250	Quad 1 (Figure 4)	Quad 1
BGA 27x27	V256	256	44mm	32mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 27x27	H256	256	44mm	32mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 27x27	X67277	672	44mm	32mm	N/A	250	Quad 1 (Figure 4)	Quad 1
BGA 27x27	V676	676	44mm	32mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 31x31	V484	484	44mm	40mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 35x35	X924	924	56mm	40mm	N/A	250	Quad 1 (Figure 4)	Quad 1
BGA 35x35	V564	564	56mm	40mm	N/A	500	Quad 1 (Figure 4)	Quad 1
BGA 40x40	X1229	1229	56mm	44mm	N/A	750	Quad 1 (Figure 4)	Quad 1

7.4.28. For eMGA/eWLB/FCCSP Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
eMGA 2.6x2.1	M102A2	10	12mm	8mm	N/A	2500	Quad 1 (figure 4)	Quad 1/2
eMGA 2.6x3	M102A3	10	12mm	8mm	N/A	2500	Quad 1 (figure 4)	Quad 1/2
eMGA 3x3	M123A3	12	12mm	8mm	N/A	2500	Quad 1 (figure 4)	Quad 1
eMGA 3x3	M1633	16	12mm	8mm	N/A	2500	Quad 1 (figure 4)	Quad 1
eMGA 3.5x3.5	M123A3	12	12mm	8mm	N/A	2500	Quad 1 (figure 4)	Quad 1
eMGA 3.5x3.5	M203A3	20	12mm	8mm	N/A	2500	Quad 1 (figure 4)	Quad 1
eMGA 3.5x3.5	J493A3	49	12mm	8mm	N/A	2500	Quad 1 (figure 4)	Quad 1
eMGA 4x4	M2444	24	12mm	8mm	N/A	2500	Quad 1 (Figure 4)	Quad 1
eMGA 5x5	M325A5	32	12mm	8mm	N/A	2000	Quad 1 (Figure 4)	Quad 1
eMGA 7.4x3.25	M123A7	12	16mm	8mm	N/A	2500	Quad 1 (figure 4)	Quad 1/2
eMGA 7.5x7.5	M2367A7	236	16mm	12mm	N/A	2500	Quad 1 (figure 4)	Quad 1
eMGA 8x6.5	M2086A8	208	16mm	12mm	N/A	1500	Quad 1 (figure 4)	Quad 1/2
eMGA 9.2x6.5	M2346A9	234	16mm	12mm	N/A	1500	Quad 1 (figure 4)	Quad 1/2
eMGA 9.9x7.2	M2667A9	266	16mm	12mm	N/A	1500	Quad 1 (figure 4)	Quad 1/2
eWLB 3.2x3.2	M643A3	64	12mm	8mm	N/A	2500	Quad 1 (Figure 4)	Quad 1
FCCSP 7.7x7.7	X817A7	81	16mm	12mm	N/A	2500	Quad 1 (Figure 4)	Quad 1

7.4.29. TO92 Parts

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel	Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	14"		
TO92 4.7x4.7	Q2	2	N/A	N/A	2000	Figure 11 & 12	N/A
TO92 4.7x4.7	Q3	3	N/A	N/A	2000	Figure 11 & 12	N/A

7.4.30. MAXIM Die Parts

7.4.30.1. For uCSP Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
uCSP	B4+1	4	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 1

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
16

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
uCSP	B4+3	4	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 1
uCSP	B4+4	4	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 1
uCSP	B4+5	4	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 1
uCSP	B6+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B6+2	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B6+3	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B6+4	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B6+5	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B6+6	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B6-1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B6-2	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B6-3	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B6-4	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B6-5	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B6-6	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B8+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B8-1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B9+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B9+2	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B9+3	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B9+4	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B9+5	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B9+6	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B9+7	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B9+8	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B9-1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B9-2	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B9-3	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B9-4	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B9-5	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B9-6	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B9-7	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B9-8	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B12+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12+10	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12+11	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12+2	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12+3	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12+4	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12+5	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12+6	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12+7	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12+8	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12+9	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
uCSP	B12-1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12-10	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12-11	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12-2	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12-3	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12-4	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12-5	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12-6	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12-7	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12-8	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B12-9	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B16+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B16+2	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B16+3	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B16+4	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B16+5	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B16+6	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B16-1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B16-2	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B16-3	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B16-4	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B16-5	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B16-6	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B20+1	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B20+2	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B20+3	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B20+4	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B20+5	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B20+6	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B20+7	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B20+8	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B20-1	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B20-2	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B20-3	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B20-4	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B20-5	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B20-6	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B20-7	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B20-8	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B25+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B25+2	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B25+3	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B25+4	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B25+5	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
uCSP	B25-1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B25-2	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B25-3	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B25-4	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B25-5	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP	B30+1	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B30+2	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B30+3	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B30+4	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B30-1	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B30-2	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B30-3	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B30-4	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B36+1	36	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B36+2	36	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B36+3	36	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B36+4	36	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B36-1	36	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B36-2	36	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B36-3	36	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP	B36-4	36	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2

NOTE:

a.) For B4 packages, quantity may be changed into 10000 if the MAXIM part number has "+T10" extension.

7.4.30.2. For uCSP-R Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
uCSP-R	R41A1+1	4	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP-R	R41B1+1	4	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP-R	R41C1+1	4	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP-R	R61A1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP-R	R61B1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP-R	R61C1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP-R	R81A2+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP-R	R91A1+1	9	8	4	N/A	10000	Quad 1 (Figure 10)	Quad 2
uCSP-R	R91A2+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP-R	R91B1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP-R	R121A2+1	12	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP-R	R121B2+1	12	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP-R	R151A2+1	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP-R	R162A2+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP-R	R202A2+1	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
19

uCSP-R	R252A2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 2
uCSP-R	R302A3+1	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP-R	R423A3+1	42	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
uCSP-R	R564A3+1	56	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
uCSP-R	R813A3+1	81	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 2
uCSP-R	R814A4+1	81	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 2
uCSP-R	R1005A5+1	100	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 2

7.4.30.3. For WLP Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
WLP	B813A3+1	81	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N121A1+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N121A2+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N121B1+1	12	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N121C1+1	12	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N121D1+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N121D1+1S	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N121E1+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N121M1+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N151A1+1	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N151A2+1	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N151B1+1	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N151B2+1	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N151C2+1	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
Thin WLP	N161A1+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
Thin WLP	N161A2+1S	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
Thin WLP	N161B1+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N162A2+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N201A2+1	20	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N201B2+1	20	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N241A2+1	24	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N241A2+2	24	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N241A2+3	24	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N241A2+4	24	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N252A2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N252B2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N252C2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N281A2+1	28	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N281A2+2	28	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N281B2+1	28	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N281B2+2	28	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N281B2+2S	28	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
THIN WLP	N302A2+1	30	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N302B2+1	30	12	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N302C2+1	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N302D2+1	30	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP HC	N352A3Z+1	35	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP HC	N352A3Z+1S	35	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N362A3+1	36	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N362B2+1	36	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N362B2+2	36	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N362C2+1	36	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N362C2+2	36	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N362D2+1	36	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N362E2+1S	36	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N362F2+1	36	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N40A0+1	4	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N40B0+1	4	8	2	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N40B1+1	4	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N40C0+1	4	8	2	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N40C1+1	4	8	2	5000	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N40D0+1	4	8	2	2500	N/A	Quad 1 (Figure 10)	Quad 1
Thin WLP	N40D1+1	4	8	4	2500	N/A	Quad 3 (Figure 1)	Quad 2
THIN WLP	N40F0+1	4	8	2	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N422A2+1	42	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N492A2+1	49	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N493A3+1	49	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N60B1+1	6	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N60C1+1	6	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N60C1+1S	6	8	2	5000	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N60D1+1	6	8	2	5000	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N60E1+1	6	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N60E1+2	6	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N60E1+2S	6	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N60F1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N60G1+1	6	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
Thin WLP	N60H1+1	6	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
Thin WLP	N60J1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
Thin WLP	N60K1+1	6	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
Thin WLP	N60K1+2	6	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
Thin WLP	N60L1+1	6	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
Thin WLP	N60M1+1	6	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
Thin WLP	N60N1+1	6	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
21

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
Thin WLP	N60O1+1	6	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
Thin WLP	N60P1+1	6	8	2	5000	N/A	Quad 2 (Figure 10)	Quad 2
Thin WLP	N60R1+1	6	8	2	5000	N/A	Quad 2 (Figure 10)	Quad 2
Thin WLP	N60R1+2	6	8	2	5000	N/A	Quad 2 (Figure 10)	Quad 2
Thin WLP	N60S1+1	6	8	2	5000	N/A	Quad 2 (Figure 10)	Quad 2
Thin WLP	N61A1+1	6	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
Thin WLP	N61B1+1	6	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
Thin WLP	N61C1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
Thin WLP	N62A2+1	6	12	4	2500	N/A	Quad 3 (Figure 1)	Quad 1
THIN WLP	N80A1+1	8	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N80B1+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N80C1+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N80D1+1	8	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N80E1+1	8	8	2	5000	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N81A1+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
THIN WLP	N91A1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N91B1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N91C1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N91D1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N91E1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
THIN WLP	N91F1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1003A3+1	100	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1004A4+1	100	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1004B4+1	100	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1004D4+1	100	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1005A5+1	100	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1005B5+1	100	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1084A5+1	108	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W1084A6+1	104	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W1093A4+1	109	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W1103A3+1	110	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W1104A4+1	110	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W1105A5+1	110	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W1105B5+1	110	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W1105C5+1	110	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1214A4+1	121	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1214B4+1	121	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1214C4+1	121	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W121A1+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121A1+2	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121A1+3	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
22

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
WLP	W121A2+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121B1+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121B2+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121B2+2	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121C1+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121C1+2	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121C2+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121D2+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121E2+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121E2+2	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121F1+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121F2+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121G1+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121G2+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121H1+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121H2+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121J1+1	12	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W121J1+2	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121K1+1	12	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W121L1+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121M1+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W121N1+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W122A1+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W122A2+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W122A2+1	12	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W1324A4+1	132	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W1324A5+1	132	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W1324B4+1	132	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W1324B4+2	132	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W1404A4+1	140	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1444B4+1	144	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1445A5+1	144	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1445A5+2	144	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W151A2+1	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W151B2+1	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W151C2+1	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W151E2+1	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W151F2+1	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W151G2+1	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W151H2+1	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W151J2+1	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
23

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
WLP	W151J2+2	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP HC	W151K2Z+1	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W154A6+1	15	16	8	N/A	5000	Quad 3 (Figure 1)	Quad 2
WLP	W1566A6+1	156	16	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W161A2+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W161B1+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W161B1+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W161C1+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W161C1+2	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W161C2+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W161C2+1S	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W161E1+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W161F1+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W161H1+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W161J1+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W161K1+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W161L1+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W161M1+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W161N1+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W162A2+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W162B2+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W162C2+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W162D2+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W162E2+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W162F2+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W162G2+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP HC	W162H2Z+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP HC	W162J2Z+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W162K2+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W162L2+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W162M2+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W162N2+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W162P2+1	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W162P2+2	16	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1695A5+1	169	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1695A5+2	169	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1695B5+1	169	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1695B5+2	169	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1825A5+1	182	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W1825A6+1	182	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W1965B5+1	196	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
24

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
WLP	W1965D5+1	196	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1965E5+1	196	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W1965E5+2	196	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W201A2+1	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W201B2+1	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W201C2+1	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W201D2+1	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	N201D2+1	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W201E2+1	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W201F2+1	20	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W201G2+1	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W201H2+1	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W201J2+1	20	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W201K2+1	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W201L2+1	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W202A2+1	20	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W202A2+2	20	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W202B2+1	20	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W202C2+1	20	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W202D2Z+1	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W202E2+1	20	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W202E2Z+1	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W20A1+2	2	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W20A1+3	2	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W2106A6+1	210	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W2256A6+1	225	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W2256B6+1	225	16	12	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W2256C6+1	225	16	12	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W241B2+1	24	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W241C2+1	24	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W241D2+1	24	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W241E2+1	24	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W241F2+1	24	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W241F2+2	24	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W241G2+1	24	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W242A2+1	24	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W242A3+1	24	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP HC	W242A3Z+1	24	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W242B3Z+1	242	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP HC	W242C3Z+1	24	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W242D3+1	24	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
25

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
WLP	W251A1+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W251A2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252A2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252B2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252B2+2	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252C2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252C2+2	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252D2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252E2+1	25	12	8	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252F2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252G2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252H2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252J2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252K2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252L2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252M2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252N2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252O2+1	25	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252P2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252Q2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252R2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252S2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP HC	W252T2Z+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W252U2+1	25	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W281A2+1	28	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W282A3+1	282	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W282B3+1	28	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W282B3Z+1	28	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP HC	W282B3Z+2	28	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP HC	W282C3Z+1	28	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP HC	W282D3Z+1	28	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W301A2+1	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP HC	W301B2Z+1	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W302A2+1	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W302A2+2	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W302A2+3	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W302A3+1	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W302A3+2	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W302B2+1	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W302B2+2	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W302B3+1	30	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
26

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
WLP	W302C2+1	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W302D2+1	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W302E2+1	30	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W302F2+1	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W302G2+1	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W302H2+1	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W302J2+1	30	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W302K2+1	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W302L2+1	30	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W302M2+1	30	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W302N2+1	30	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W302O2+1	30	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W302P2Z+1	30	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W302Q2+1	30	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP HC	W302R2Z+1	30	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W303A3+1	30	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W303B3+1	30	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W303C3+1	30	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W312A2+1	31	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W321A3+1	32	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W321B3+1	32	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W322A4+1	32	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W322A4Z+2	32	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W322A4Z+2	32	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W352A2+1	35	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W352A3+1	35	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W352B3+1	35	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W352C3+1	35	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W352E3+1	35	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP HC	W352F3Z+1	35	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP HC	W352F3Z+1S	35	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W362A2+1	36	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W362A2+2	36	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W362A2+3	36	12	8	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W362A3+1	36	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W362B2+1	36	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W362C2+1	36	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W362D2+1	36	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W362F2+1	36	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W362F2+2	36	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W362G2+1	36	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
27

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
WLP	W362G2+2	36	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W362H2+1	36	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W362H2+1S	36	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W362J2+1	36	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W363A3+1	36	12	8	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W363A3+2	36	12	8	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W363A3+3	36	12	8	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W363B3+1	36	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W402A3+1	40	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W402A3+2	40	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W402A4+1	40	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W402B3+1	40	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP HC	W402B4Z+1	40	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W40A0+1	4	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W40A1+1	4	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W40B1+1	4	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W40C1+1	4	8	4	N/A	10000	Quad 1 (Figure 10)	Quad 1
WLP	W40D0+1	4	8	2	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W40D1+1	4	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W40E0+1	4	8	2	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W41A1+2	4	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W41C1+1	4	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W41D1+1	4	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W41E1+1	4	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 1
WLP	W41F1+1	4	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 1
WLP	W422A3+1	42	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W422B2+1	42	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W422B3+1	42	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W422C2+1	42	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W422D2+1	42	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W422E2+1	42	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W422F2+1	42	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W423A3+1	42	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W423B3+1	42	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W423B3+1	42	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W423C3+1	42	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W423D3+1	42	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W423E3+1	42	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W423F3+1	42	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W423G3+1	42	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W452A2+1	45	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
28

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
WLP HC	W452A4Z+1	45	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W453A2+1	45	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W463A3+1	46	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W482A2+1	48	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W482A3+1	48	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W482B2+1	48	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W492A2+1	49	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W492A3+1	49	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W493A3+1	49	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W493B3+1	49	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W493B3+2	49	12	8	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W493C3+1	49	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W493D3+1	49	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W493E3+1	49	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W493F3+1	49	12	8	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W493G3+1	49	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W493G3+2	49	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W542A3+1	54	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W542B3+1	54	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W542C3+1	54	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W546A9+1	54	12	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W562A3+1	56	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W562B3+1	56	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W563A4+1	56	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W563A4+2	56	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W563C3+1	56	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W563D3+1	56	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W563D3+2	56	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W563E3+1	56	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W563F3+1	56	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W563G3+1	56	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W563H3+1	56	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W564A3+1	56	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W573A3+1	56	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W584B2+1	58	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W603A3+1	60	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W60A0+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W60A1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W60B1+1	6	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W60C1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W60C1+2	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
29

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
WLP	W60C1+3	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W60D1+1	6	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W60H1+1	6	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W61A1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W61B1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W61C1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W61C1+2	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W61D1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W61E1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W61F0+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W61F1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W61G1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W61H0+1	6	8	2	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W61J1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W61J1+2	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W61K1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W61L1+1	6	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W633A3+1	63	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W633B3+1	63	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 2
WLP	W633D3+1	63	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W642A2+1	64	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W642B2+1	64	12	8	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W643A3+1	64	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W643B3+1	64	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W643C3+1	64	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W643D3+1	64	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W644A4+1	64	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W644A4+2	64	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W674A2+1	67	12	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W703A4+1	70	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W704A4+1	70	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W723A3+1	72	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W723B3+1	72	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W723C3+1	72	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W724A4+1	72	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W733A5+1	73	12	8	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W763A3+1	76	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W773A4+1	77	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W803A3+1	80	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W803A4+1	80	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W80A1+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
30

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
WLP	W80B1+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W80C1+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W80D1+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W813A3+1	81	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W813B3+1	81	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W813C3+1	81	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W813D3+1	81	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W814A4+1	81	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W814B4+1	81	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W814C4+1	81	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W814D4+1	81	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W81A1+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W81A2+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W81A2+2	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W81B1+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W81B2+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W81C1+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W81C2+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W81D1+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W903A4+1	90	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W903B4+1	90	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W903C4+1	90	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W904A4+1	90	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W904C4+1	90	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W904D4+1	90	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W90A0+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91A2+1	9	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W91B1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91B1+2	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91B1+3	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91B1+5	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91B1+6	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91B1+7	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91B1+8	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91B1+9	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91B2+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91C1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91C2+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91C2+2	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91D1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91D1+2	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
WLP	W91E1Z+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91F1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91F1+2	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91G1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91G1+2	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91G1+3	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91J1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91K1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91L1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91N1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91P1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91Q1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W91R1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W92A1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W964A4+1	96	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
WLP	W993B4+1	99	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
WLP	W993C4+1	99	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
Thick WLP	Y1443A5+1	144	12	8	2000	N/A	Quad 2 (Figure 10)	Quad 2
Thick WLP HC	Y1445A5Z+1	144	12	8	2000	N/A	Quad 1 (Figure 10)	Quad 1
ULTRA THIN WLP	Z151A2+1	15	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
ULTRA THIN WLP	Z201A1+1	20	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
ULTRA THIN WLP	Z40A0+1	4	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
ULTRA THIN WLP	Z40B0+1	4	8	2	2500	N/A	Quad 1 (Figure 10)	Quad 1
ULTRA THIN WLP	Z40C0+1	4	8	2	2500	N/A	Quad 1 (Figure 10)	Quad 1
ULTRA THIN WLP	Z40C0+2	4	8	2	2500	N/A	Quad 1 (Figure 10)	Quad 1
ULTRA THIN WLP	Z41A1+1	4	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
ULTRA THIN WLP	Z60A1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
ULTRA THIN WLP	Z60C1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
ULTRA THIN WLP	Z60D1+1	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
ULTRA THIN WLP	Z60D1+2	6	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
ULTRA THIN WLP	Z60E1+1	6	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
ULTRA THIN WLP	Z80A1+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
32

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
ULTRA THIN WLP	Z80B1+1	8	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
ULTRA THIN WLP	Z80C1+1	8	8	2	2500	N/A	Quad 2 (Figure 10)	Quad 2
ULTRA THIN WLP	Z80D1+1	8	8	4	2500	N/A	Quad 2 (Figure 10)	Quad 2
ULTRA THIN WLP	Z91A1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1
ULTRA THIN WLP	Z91B1+1	9	8	4	2500	N/A	Quad 1 (Figure 10)	Quad 1

Note: Refer to Figure 10 for other information.

7.4.31. For SOT Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
SOT23 2.85x1.3	U3	3	8mm	4mm	2500 /3000	10000	Quad 3 (Figure 3a&3b)	Quad 3
SOT23 2.85x1.3	U4	4	8mm	4mm	2500	10000	Quad 3 (Figure 3a &3b)	Quad 3
SOT23 2.9x1.62	U5	5	8mm	4mm	2500 /3000	10000	Quad2(Figure 3a) Quad3 (Figure 3b)	Quad 3
SOT23 2.9x1.62	U6	6	8mm	4mm	2500 /3000	10000	Quad2(Figure 3a) Quad3(Figure 3b)	Quad 3
SOT23 2.9x1.62	K8	8	8mm	4mm	2500	10000	Quad2(Figure 3a) Quad3(Figure 3b)	Quad 3
SOT223 6.5x3.5	K3	4	16mm	12mm	N/A	2500	Quad3(Figure 9)	Quad 3

Note: SOT-23 Pin 1 orientation would depend on the part numbers.

7.4.32. For Thin SOT Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
Thin SOT	Z5	5	8mm	4mm	2500 /3000	10000	Quad2(Figure 3a) Quad3 (Figure 3b)	Quad 3
Thin SOT	Z6	6	8mm	4mm	2500 /3000	10000	Quad2(Figure 3a) Quad3 (Figure 3b)	Quad 3

7.4.33. For SC70 Packages

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
SC70 2x1.25	X3	3	8mm	4mm	2500	N/A	Quad3 (Figure 5)	Quad 3
SC70 2x1.25	X4	4	8mm	4mm	2500	N/A	Quad3 (Figure 5)	Quad 3
SC70 2x1.25	X5	5	8mm	4mm	2500	N/A	Quad2 (Figure 5)	Quad 3
SC70 2x1.25	X6	6	8mm	4mm	2500	N/A	Quad2 (Figure 5)	Quad 3
SC70 2x1.25	X8	8	8mm	4mm	2500	N/A	Quad 2 (Figure 5)	Quad 3

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
33

7.4.34. For SFN and Ultra SFN Packages


Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
SFN 6x6	G266	2	16mm	12mm	N/A	2500	Quad 4 (Figure 8)	Quad 2
SFN 3.5x6.5	T23A6	2	16mm	8mm	N/A	2500	Quad 4 (Figure 8)	Quad 1/2
SFN 5x3.5	S23A5	2	12mm	8mm	N/A	2500	Quad 1 (Figure 8)	Quad 1/2

7.4.35. For Dallas Die Parts

Package	Package Code	Pin Count	Carrier Tape		Quantity per Reel		Pin 1 Orientation	EIA481-F Standard
			Width	Pitch	7"	13"		
uCSP	BF1223-2	12	8mm	4mm	N/A	10000	Quad 2 (Figure 10)	Quad 2
uCSP	BF411-1	4	8mm	4mm	N/A	10000	Quad 1	Quad 1
uCSP	BF211-1	2	8mm	4mm	N/A	10000	Quad 2 (Figure 10)	Quad 2
uCSP	BF211-2	2	8mm	4mm	N/A	10000	Quad 2 (Figure 10)	Quad 2
uCSP	BF823-1	8	8mm	4mm	N/A	10000	Quad 2 (Figure 10)	Quad 2
uCSP	BF1422-1	14	8mm	4mm	N/A	10000	Quad 1 (Figure 10)	Quad 1
uCSP	BF1522-1	15	8mm	4mm	N/A	10000	Quad 2 (Figure 10)	Quad 2
uCSP	BF411-3	4	8mm	4mm	N/A	10000	Quad 1 (Figure 10)	Quad 1
uCSP	BF422-1	4	8mm	4mm	N/A	10000	Quad 1 (Figure 10)	Quad 1
uCSP	BF611-1	6	8mm	4mm	N/A	10000	Quad 2 (Figure 10)	Quad 2
uCSP	BF623-3	6	8mm	4mm	N/A	10000	Quad 2 (Figure 10)	Quad 2
uCSP	BF622+1	6	8mm	4mm	N/A	10000	Quad 2 (Figure 10)	Quad 2
uCSP	BF823+1	8	8mm	4mm <td N/A	10000	Quad 2 (Figure 10)	Quad 2	

7.5. TAPE AND REEL ORIENTATION:

7.5.1. FIGURE 1: General Tape and Reel Orientation

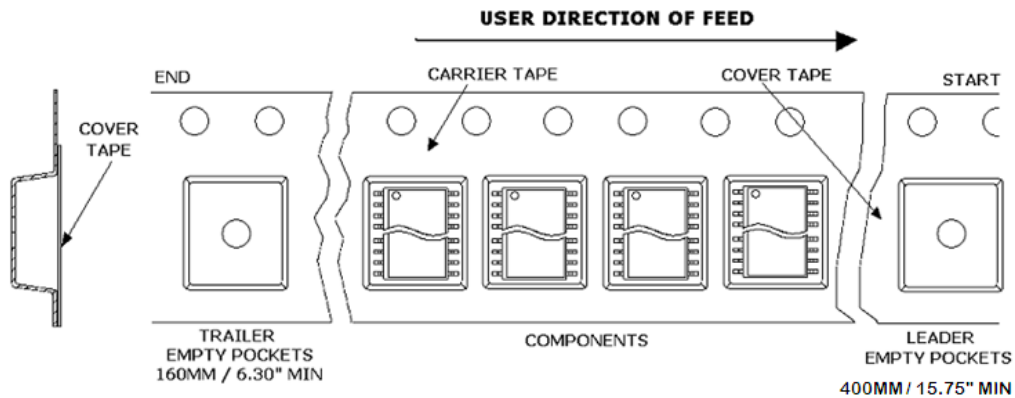


7.5.1.1. QUADRANT DESIGNATION


Use pin1 mark to determine the correct orientation of unit in reel

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL		
DOCUMENT I.D. 04-4051	REVISION AO	PAGE 34




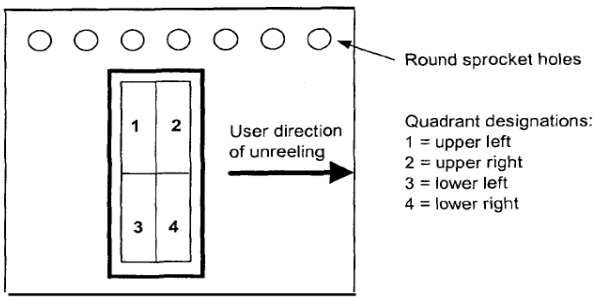

7.5.2. FIGURE 2: SOIC/SSOP/TSSOP/MSOP/QSOP/TSOC

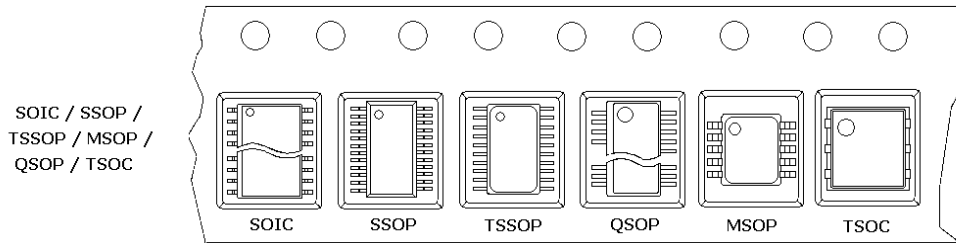


7.5.3. FIGURE 3a: SOT-23 Maxim Part Numbers (COMETS) – MAX prefix.

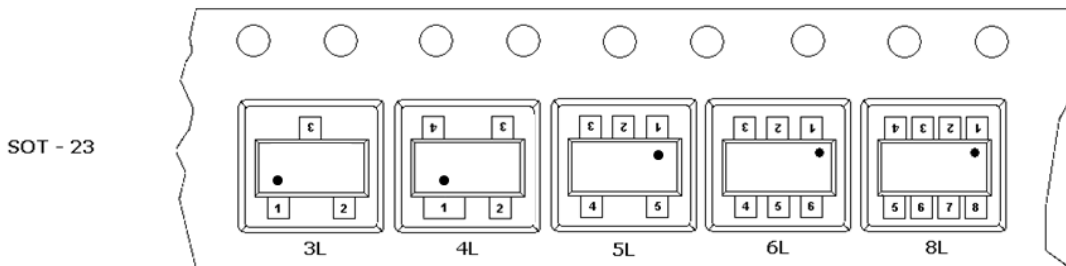

Note: For SOT-23 4L, pin1 is wider than other pins

7.5.4. FIGURE 3b: SOT-23 Dallas Part Numbers (MAXCIM) – DS prefix.

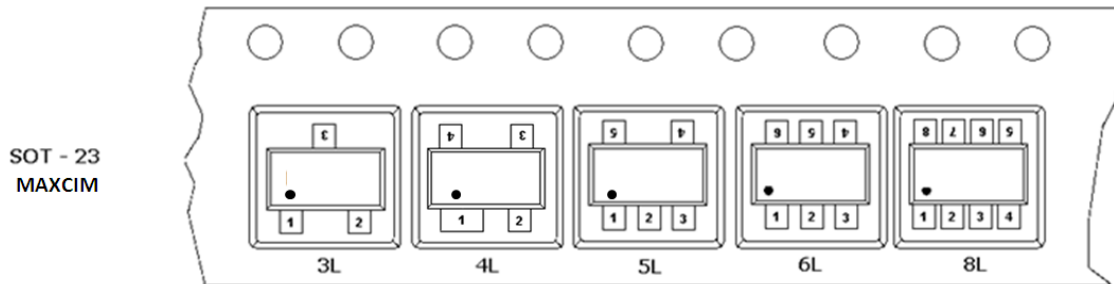

Note: For SOT-23 4L, pin1 is wider than other pins

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL


DOCUMENT I.D.
04-4051

REVISION
AO


PAGE
35



7.5.5. FIGURE 4: PLCC / TQFP / LQFP / MQFP / BGA / eMGA

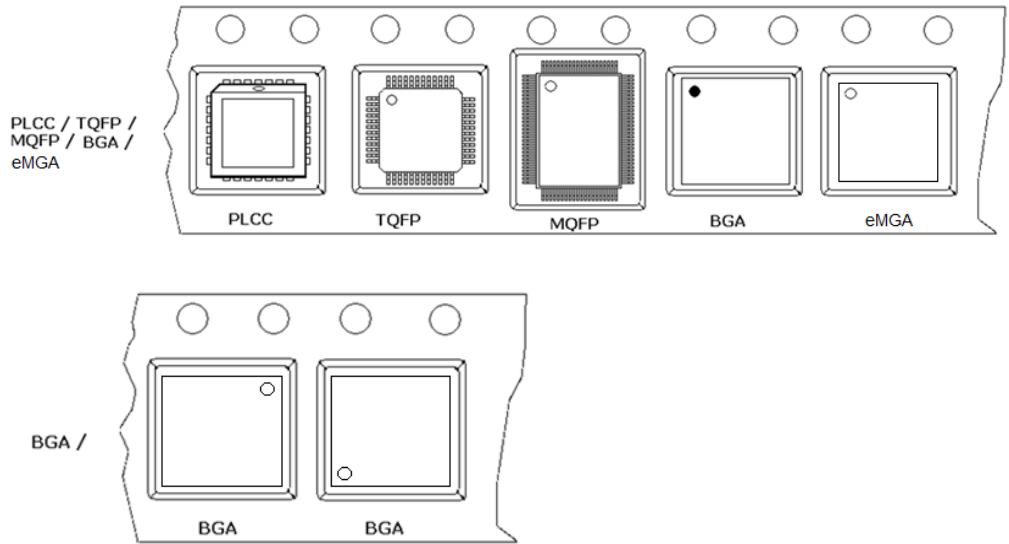


7.5.6. FIGURE 5: SC70

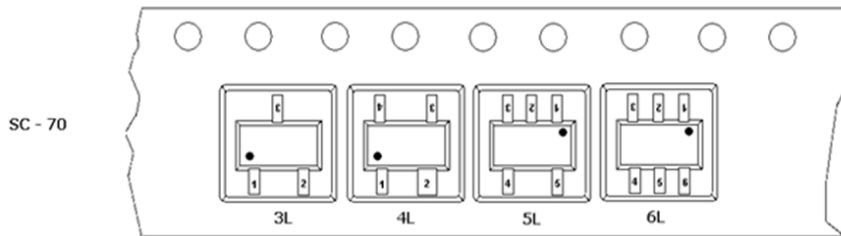

Note: For SC70 4L, pin2 is wider than other pins

7.5.7. FIGURE 6: T/QFN / OTDFN / T/DFN / MRQ / WLQFN / RQFN / FCQFN / FC2QFN

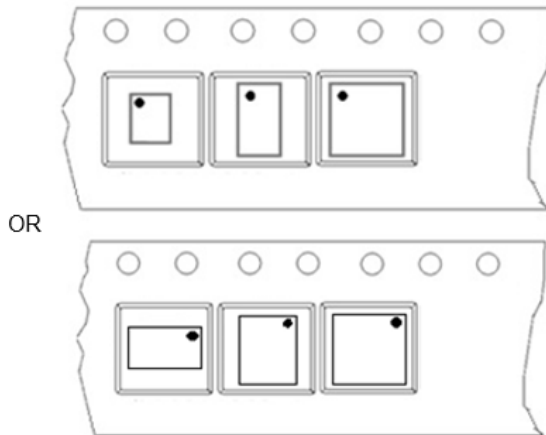

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL


DOCUMENT I.D.
04-4051

REVISION
AO


PAGE
36




7.5.8. FIGURE 7: LGA / OLGA / Thin LGA

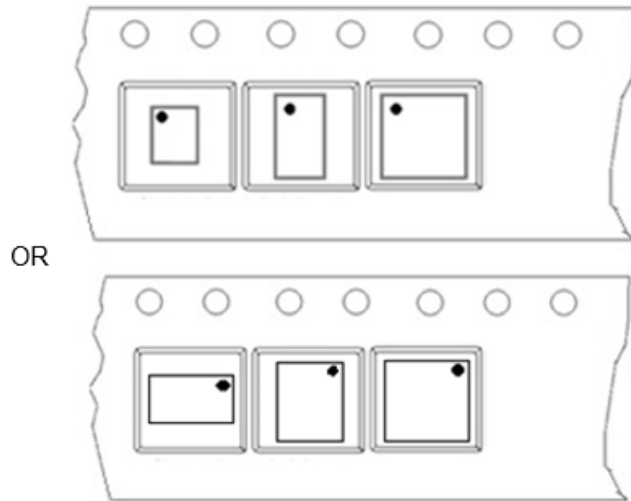

7.5.9. FIGURE 8: SFN DEAD BUG

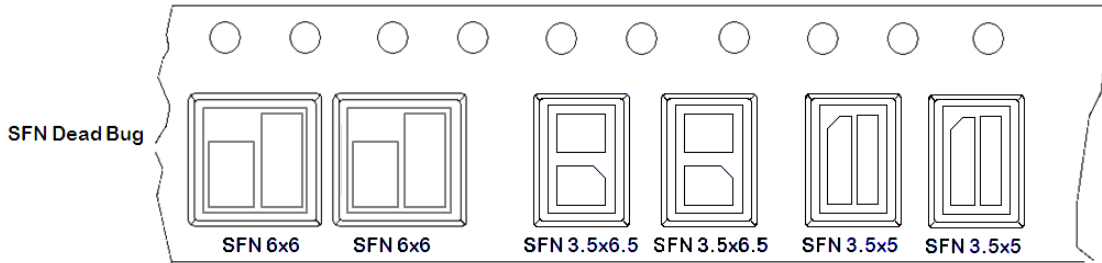

7.5.10. FIGURE 9: MECHANICAL POLARIZATION SOT 223 DEVICE

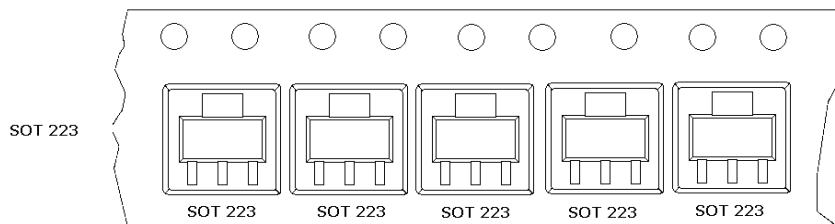

7.5.11. FIGURE 10: WLP/uCSP/uCSP-R.

FOR SQUARE DIE:


TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL

DOCUMENT I.D.
04-4051


REVISION
AO

PAGE
37



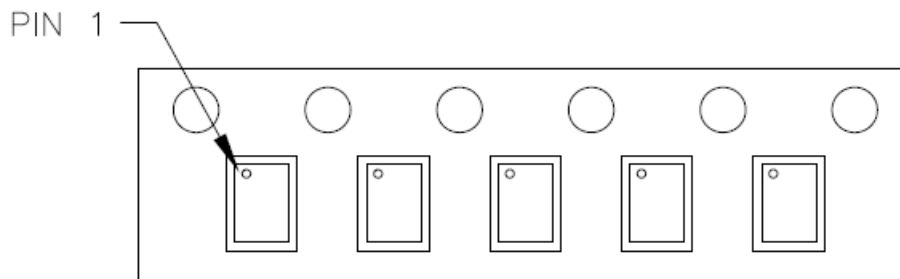

FOR RECTANGULAR DIE:

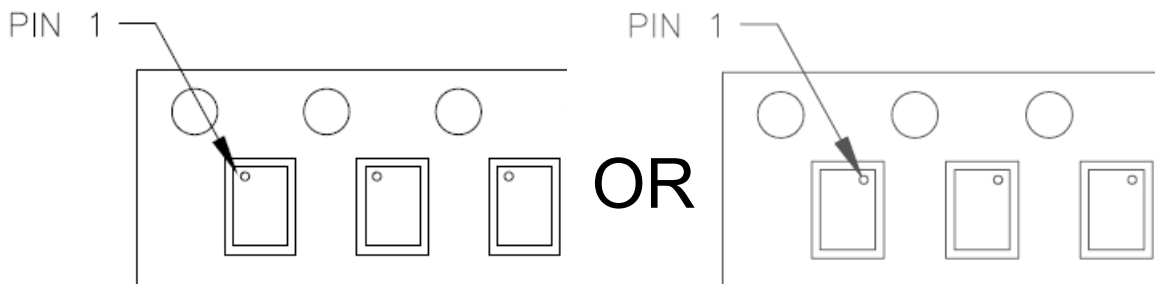


NOTE:

- A. For rectangular die, Component should be placed with it's longer side perpendicular to tape length with the Pin 1 indicator near the round sprocket hole.
- B. A component is considered square if the edges have a difference no greater than 0.3mm between the nominal length and width.

EXEMPTION TO ABOVE STANDARD:


- A. Customer Special Request for preferred orientation.
- B. Previously approved orientation by Customer.

7.5.12. FIGURE 11a: TO-92 Rounded side of Transistor and Adhesive Tape Visible (Style A).

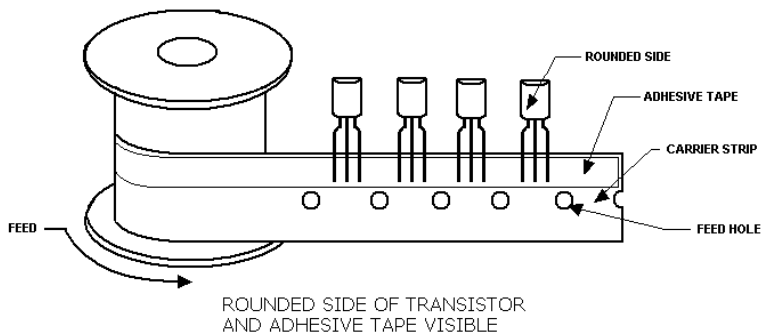


7.5.13. FIGURE 11b: Flat side of Transistor and Carrier Strip Visible (Style B)


TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL		
DOCUMENT I.D. 04-4051	REVISION AO	PAGE 38

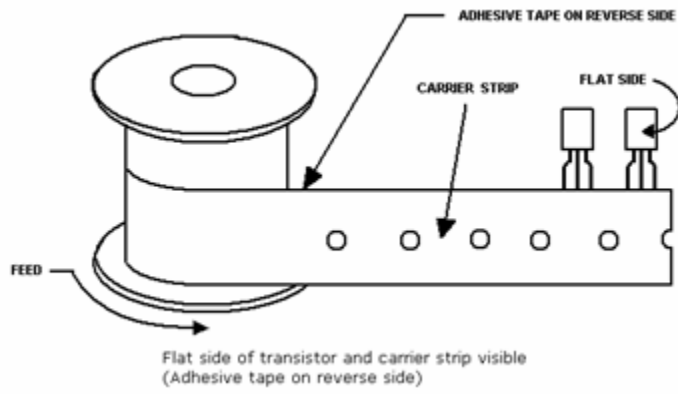

7.5.14. FIGURE 11c: Flat side of Transistor and Adhesive Tape Visible Style E

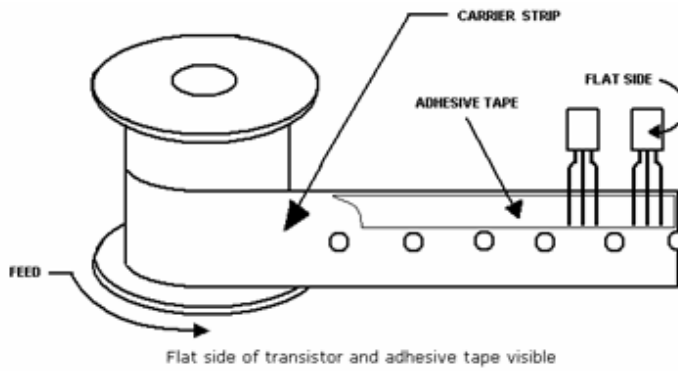

7.5.15. FIGURE 11d: Rounded side of transistor and carrier strip visible (Style F)

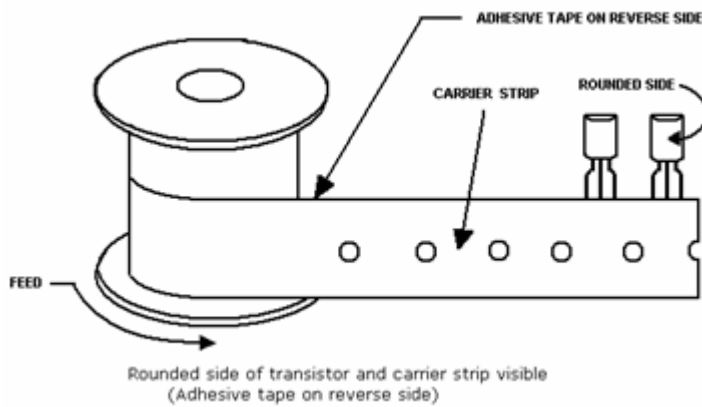

7.5.16. FIGURE 12: Rounded side transistor and adhesive tape visible (Style Straight Leads)


TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL

DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
39



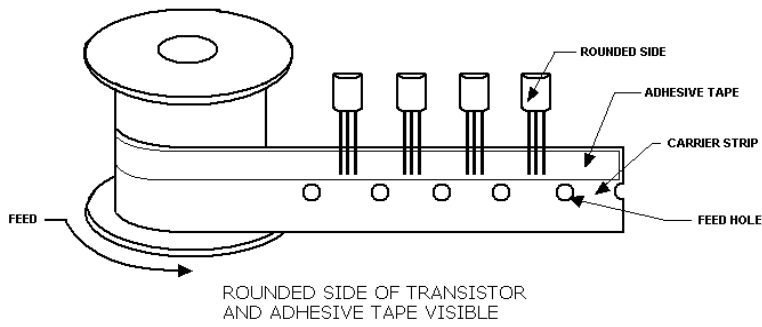

- 8. **ACCEPTANCE:** N/A
- 9. **DISPOSITION OF MATERIAL:** N/A
- 10. **DATA RECORDING:** N/A
- 11. **MAINTENANCE:** N/A
- 12. **APPENDICES:**

12.1. List of TQFN 3x3 Using 12mm Carrier Tape Width

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL		
DOCUMENT I.D. 04-4051	REVISION AO	PAGE 40

APPENDIX 12.1 List of TQFN 3x3 Using 12mm Carrier Tape Width

806-0723-20+T	MAX16024LTBS+T	MAX3945ETE+T	MAX9700AETB+T
90-1190N+TRL (DS1190N+T)	MAX16024LTBZ18+T	MAX3948ETE+T	MAX9700BETB+T
90-1343D+18T (DS1343D-18+T&R)	MAX16024PTBS+T	MAX3949ETE+T	MAX9700CETB+T
90-1343D+33T (DS1343D-33+T&R)	MAX16056ATA16+T	MAX3982UTE+T	MAX9700DETb+T
90-1343D+3TR (DS1343D-3+T&R)	MAX16056ATA17+T	MAX44205ATC+T	MAX9712ETB+T
90-1344D+18T (DS1344D-18+T&R)	MAX16056ATA26+T	MAX4695ETC+T	MAX9724CETC+T
90-1344D+33T (DS1344D-33+T&R)	MAX16056ATA31+T	MAX4701ETE+T	MAX9814ETD+T
90-1344D+3TR (DS1344D-3+T&R)	MAX16056ATA46+T	MAX4702ETE+T	MAX98357AETE+T
90-1841N+TRL (DS1841N+T&R)	MAX16057ATT17+T	MAX4734ETC+T	MAX98357AGTE/V+T
90-1842A+NTR (DS1842AN+T&R)	MAX16057ATT23+T	MAX4740ETE+T	MAX98357BETE+T
90-1842N+TRL (DS1842N+T&R)	MAX16057ATT31+T	MAX4780ETE+T	MAX98358ETE+T
90-1L8CN+T33 (DS1088CN-133+T)	MAX16057ATT33+T	MAX4780ETE+TG05	MAX9890BETA/V+T
90-2741N+TRL (DS2741N+)	MAX16057ATT46+T	MAX4781ETE+T	MAX9947ETE+T
90-2746G+C1T (DS2786G-C01+T&R)	MAX16058ATA16+T	MAX4782ETE+T	MAX9947ETE+TGH7
90-2746G+C2T (DS2746G-C02+T&R)	MAX16058ATA17+T	MAX4783ETE+T	MAX49918IATB+T
90-2746G+C3T (DS2746G-C03+T&R)	MAX16058ATA18+T	MAX4784ETE+T	MAX49925ATB/VY+T
90-2746G+TRL (DS2746G+T&R)	MAX16058ATA22+T	MAX4852ETE+T	
90-2786G+BTR (DS2786BG+T&R)	MAX16058ATA23+T	MAX4854ETE+T	
90-2786G+C1T (DS2786G-C1+T&R)	MAX16058ATA26+T	MAX4854ETE-T	
90-2786G+C29 (DS2786G-C29+T)	MAX16058ATA27+T	MAX4854HETE+T	
90-2786G+C2T (DS2786G-C2+T&R)	MAX16058ATA28+T	MAX4887ETE+T	
90-2786G+C3T (DS2786G-C03+T&R)	MAX16058ATA29+T	MAX4899AEETE+T	
90-2786G+CB3 (DS2786BG-C3+T&R)	MAX16058ATA30+T	MAX4899AEETE+TGH7	
90-2786G+TRL (DS2786G+T&R)	MAX16058ATA31+T	MAX4899EETE+T	

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL

DOCUMENT I.D. 04-4051	REVISION AO	PAGE 41
---------------------------------	-----------------------	-------------------



90-30205+TTR (MAX30205MTA+T)	MAX16058ATA44+T	MAX4910ETE+T
90-31629+TTR (MAX31629MTA+T)	MAX16058ATA46+T	MAX4990ETD+T
90-31725+TTR (MAX31725MTA+T)	MAX16059ATT16+T	MAX5084ATT+T
90-31730+TRT (MAX31730ATC+T)	MAX16059ATT17+T	MAX5085ATT+T
90-31D80+T03 (MAX31D80T-003+T)	MAX16059ATT19+T	MAX5417LETA+T
90-31D80+UGQ (MAX31D80T-UGQ+T)	MAX16059ATT22+T	MAX5417META+T
90-34565+00T (MAX34565ETB+T)	MAX16059ATT23+T	MAX5417NETA+T
90-3908N+TRL (DS3908N+T&R)	MAX16059ATT26+T	MAX5418LETA+T
90-4402N+TRL (DS4402N+T&R)	MAX16059ATT29+T	MAX5418META+T
90-4404N+TRL (DS4404N+T&R)	MAX16059ATT30+T	MAX5418META+TG002
90-4420N+C01 (DS4420N-C01+T)	MAX16059ATT31+T	MAX5418NETA+T
90-4420N+TRL (DS4420N+T&R)	MAX16059ATT32+T	MAX5418PETA+T
90-4422N+TRL (DS4422N+T&R)	MAX16059ATT46+T	MAX5419LETA+T
90-4424N+TRL (DS4424N+T&R)	MAX16126TCC+T	MAX5419META+T
90-B151G+TRL (MAX17201G+T)	MAX16819ATT+T	MAX5419NETA+T
90-B155G+TRL (MAX17205G+T)	MAX16820ATT+T	MAX5419PETA+T
90-B15FG+TRL (MAX17215G+T)	MAX16990ATCD/V+T	MAX5422ETA+T
MAX11165ETC+T	MAX16991ATCC/V+T	MAX5423ETA+T
MAX11166ETC+T	MAX16991ATCD/V+T	MAX5423ETA-T
MAX11167ETC+T	MAX16992ATCC/V+T	MAX5424ETA+T
MAX12000ETB+T	MAX16992ATCD/V+T	MAX5477ETE+T
MAX12000ETB+TG128	MAX16992ATCE/V+T	MAX5478ETE+T
MAX12001ETB+T	MAX16992ATCF/V+T	MAX5479ETE+T
MAX13042EETD+T	MAX20001ETE/V+T	MAX5481ETE+T
MAX13342EETD+T	MAX20001ETE+T	MAX5482ETE+T
MAX13342EETD+TG40	MAX20050ATC/V+T	MAX5483ETE+T
MAX13345EETD+T	MAX20050ATC/V+TCMS	MAX5484ETE+T
MAX13366BGTE/V+T	MAX20050ATC/V+TW	MAX5547ETA+T
MAX13366GTE/V+T	MAX20052ATC/V+TCMS	MAX5548ETE+T
MAX13366GTE/V+TW	MAX20060ATC/V+T	MAX5550ETE+T
MAX13366GTE/VSMP+T	MAX2014ETA+T	MAX6397LATA+T

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL

DOCUMENT I.D. 04-4051	REVISION AO	PAGE 42
---------------------------------	-----------------------	-------------------



MAX1391ETB+T	MAX2181AETE/V+T	MAX6397LATA+TG071
MAX1392ETB+T	MAX2181AETE/V+TGH7	MAX6397SATA+T
MAX1393ETB+T	MAX2181AETE+T	MAX6397TATA+T
MAX1394ETB+T	MAX2181ETE/V+T	MAX6398ATT+T
MAX1395ETB+T	MAX2371ETC+T	MAX6398ATT+TG071
MAX1396ETB+T	MAX2373ETC+T	MAX6399ATA+T
MAX14514ETD+T	MAX2373ETC+TG071	MAX6399ATA+TGA4
MAX14580EETE+TC77	MAX2373ETC-TG071	MAX6495ATT/V+T
MAX14580EETE+TCCE	MAX2388ETC+T	MAX6495ATT+T
MAX1479ATE+T	MAX2670GTB/V+T	MAX6495ATT+TG071
MAX15006AATT/V+T	MAX2670GTB+T	MAX6496ATA+T
MAX15006AATT+T	MAX3205EATE+T	MAX6496ATA+TG071
MAX15006BATT/V+T	MAX3205EATE+TG069	MAX6497ATA+T
MAX15006BATT+T	MAX3208EATE+T	MAX6498ATA+T
MAX15006CATT/V+T	MAX3377EETD+T	MAX6499ATA/V+T
MAX15006CATT+T	MAX3378EETD+T	MAX6499ATA+T
MAX15006DATT/V+T	MAX3391EETD+T	MAX6767TALD2/V+T
MAX15007AATT+T	MAX3394EETA+T	MAX6782TEA+T
MAX15007AATT+TW	MAX3450EETE+T	MAX6783TEA+T
MAX15007BATT/V+T	MAX3450EETE+TGA8	MAX6785TCB+T
MAX15007BATT+T	MAX3453EETE+T	MAX6786TA+T
MAX15007CATT/V+T	MAX3456EETE+T	MAX6946ATE+T
MAX15007CATT+T	MAX3456EETE+TG071	MAX6946ATE+TG47
MAX15041ETE+T	MAX3456EETE+TG126	MAX6947ATE+T
MAX15041ETE+TC90	MAX3657ETC+T	MAX6965ATE+T
MAX15041ETE+TCGM	MAX3658AETA+T	MAX6966ATE+T
MAX16010TAA+T	MAX3736ETE+T	MAX7302ATE+T
MAX16010TAA-T	MAX3736ETE-T	MAX7315ATE+T
MAX16010TAB+T	MAX3741ETE-T	MAX7316ATE+T
MAX16010TAC+T	MAX3741ETE-TG002	MAX7317ATE+T
MAX16011TAA+T	MAX3741HETE#TG16	MAX7317ATE+TGH7
MAX16011TAB+T	MAX3746ETE-T	MAX7319ATE+T
MAX16011TAC+T	MAX3746HETE#TG16	MAX7320ATE+T
MAX16012TT+T	MAX3748AETE-T	MAX7320ATE+TG104
MAX16013TT+T	MAX3748BETE#TG16	MAX7321ATE+T
MAX16016LTBM+T	MAX3748HETE#TG16	MAX7322ATE+T
MAX16016LTBR+T	MAX3748HETE#TGC6	MAX7323ATE+T
MAX16016LTBS+T	MAX3748HETE+T	MAX8568AETE+T
MAX16016PTBZ+T	MAX3785ITT+T	MAX8614BETD/V+T
MAX16023PTAL33+T	MAX3785UTT+T	MAX8678ETE+T
MAX16023PTAM33+T	MAX3785UTT-T	MAX9225ETE+T
MAX16023PTAS25+T	MAX3804ETE#TG16	MAX9226ETE+T
MAX16023PTAT12+T	MAX3804ETE+T	MAX9235ETE+T
MAX16024LTBL+T	MAX3804ETE-T	MAX9507ATE+T
MAX16024LTBR+T	MAX3806GTC+T	MAX9507ATE+TG071

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL

DOCUMENT I.D. 04-4051	REVISION AO	PAGE 43
---------------------------------	-----------------------	-------------------



REVISION HISTORY

REV	JUSTIFICATION OF ECN	DATE	INIT.
	See previous revision for earlier details on changes		
U	ECN#PH-15-1340. Revised all 3x3 package types mentioned in items 7.4.11 and 7.4.13 .Removed PH-Batangas on the affected facility.	10/04/15	LO
W	ECN#PH-18-0366 Added Thai Language	02/20/18	KM/LO
X	ECN PH-18-2758. Revised items 7.4.3., 7.4.5., 7.4.6., 7.4.10., 7.4.12., 7.4.18., 7.4.19., 7.4.21., 7.4.23., - 7.4.27., 7.4.29., 7.4.31., 7.4.33., 7.4.34., 7.5.5., 7.5.7 and 7.5.8. Added items 7.4.11., 7.4.13.-7.4.17., 7.4.20., 7.4.22., 7.4.32.	08/02/18	LO
Y	ECN# PH-18-4757. Added note under item 7.4.12. Revised under table 7.4.28 for eMGA Packages to eMGA 3.5x3.5. Added eMGA 4x4 and 5x5. Added Appendix 12.1.	12/05/18	LO
Z	CN 1097733. Corrected orientation for B4+1, B4+3, and B4+4. Removed obsolete packages B4+2, B4-1, B4-2, B4-3, B4-4. Added new WLP packages in item 7.4.30.3	09/02/20	SJT
AA	CN 1110623. Revised to correct tape width on some affected package codes and updated tape multiple for U6 per MAXCIM requirement.	12/28/20	LO
AB	CN 1115590. Revised to update tables to latest EIA 481 E. Revised table 7.4.6 to add tape width and pitch used by Assembly for 48L TSSOP. Revised items 7.5.7 and 7.5.8	02/25/21	LO
AC	CN 1119493. Revised to update EIA 481 E component orientation in the table for rectangular geometry of tables 7.4.10 to 16, 7.4.18 to 19, 7.4.21 to 23 and 7.4.27 to 28. Added new package codes in tables 7.4.10 to 11, 7.4.13 to 14, 7.4.17, 7.4.21 to 23 and 7.4.28.	04/10/21	LO
AD	CN 1122141. Revised tables 7.4.12 and 7.4.19 to include additional information on the 3x3 TQFN/TDFN devices with 12mm tape with requirement. Added DS part number equivalent for MAXCIM parts in appendix 12.1.	04/19/21	LO
AE	CN 1158050. Changed EIA481 revision from E to F to align with the current industry std release.	04/11/22	LO
AF	CN 1180976. Updated spec to align carrier tape width and unit orientation on tape. Added tape info for new package codes AF	02/20/23	LO
AG	CN 1202280. Updated spec to align carrier tape width and unit orientation on tape for FC2QFN 4.5X5.75 / F234A5.	01/15/24	PY
AH	CN 1204078. Updated tables for new package codes	02/14/24	LO
AI	CN 1205695. Added new package codes in item 7.4.14.	03/11/24	LO
AJ	CN 1206056 Added new package code W91F1+2 at 7.4.30.3 For WLP Packages	03/15/24	JH
AK	CN 1208520. Added new package code Z41A1+1 at 7.4.30.3 For WLP Packages	04/30/24	JH
AL	CN 1209896. Added new package code N201D2+1 at 7.4.30.3 For WLP Packages	05/24/24	ST
AM	CN 1211156. Added new package code W362A3+1 at 7.4.30.3 For WLP Packages.	06/19/24	ST
AN	CN 1212246. Added new package code W492A3+1 at 7.4.30.3 For WLP Packages.	07/08/24	ST
AO	CN 1212716. Revise orientation quadrant of Package Code F142A3 to match with EIA standard	07/16/24	AS

TITLE: STANDARD QUANTITY ON REEL AND ORIENTATION OF TAPE AND REEL



DOCUMENT I.D.
04-4051

REVISION
AO

PAGE
44