EVALUATION KIT AVAILABLE

MAX20015–MAX20018 Single 2.2MHz, Low-Voltage, Step-Down DC-DC Converter Family for Safety Applications

General Description

The MAX20015–MAX20018 family of ASIL B-compliant high-efficiency switching regulators delivers up to 3A load current from 0.5V to 3.8V. The devices operate from a 2.7V to 5.5V input voltage range, making them ideal for on-board point-of-load and post-regulation applications. Total output error is less than ±1.5% over load, line, and temperature.

The devices feature fixed-frequency PWM mode operation, with a 2.2MHz switching frequency. High-frequency operation allows for an all-ceramic capacitor design and small external components.

The low-resistance on-chip switches ensure high efficiency at heavy loads while minimizing critical inductances, making the layout a much simpler task with respect to discrete solutions. Following a simple layout and footprint ensures first-pass success in new designs.

The devices provide an enable input, spread-spectrum enable input, and $\overline{\text{RESET}}$ output. The output voltage can be preset at the factory to allow customers to achieve ±1.5% output-voltage accuracy without using expensive 0.1% resistors. In addition, the output voltage can be set to any customer value by using two external resistors at the feedback, with 0.5V internal reference. The devices offer factory-programmable soft-start and $\overline{\text{RESET}}$ hold times.

The 10-pin TDFN exposed pad devices include overtemperature shutdown and overcurrent limiting. All devices are designed to operate over the -40°C to +125°C ambient temperature range.

Applications

- Automotive
- Point-of-Load (PoL)

Benefits and Features

- High Feature Set in Ultra-Small Footprint
  - High-Efficiency DC-DC Converter
  - Up to 3A Output Current
  - 2.7V to 5.5V Operating Supply Voltage
  - Resistor-Adjustable or Factory-Preset Output Voltages
  - Synchronizable, 2.2MHz Switching Frequency
  - Enable Input
  - $\overline{\text{RESET}}$ Output
  - Spread-Spectrum Enable Input
  - Forced-PWM and Skip Modes
  - Current-Mode Architecture
  - 3mm x 3mm x 0.75mm, 10-Pin TDFN
- High Precision
  - Selectable Overvoltage/Undervoltage Thresholds
  - ±1.5% OV/UV Accuracy
  - ±1.5% Output-Voltage Accuracy
  - Excellent Load-Transient Performance
  - Overtemperature and Short-Circuit Protection
  - -40°C to +125°C Operating Temperature Range
- Diagnostics and Redundant Circuits
  - ASIL B Compliant
  - Redundant Reference
  - Shorted Pin Detection on $\overline{\text{RESET}}$


Visit Web Support to complete the nondisclosure agreement (NDA) required to receive additional product information.

Ordering Information appears at end of data sheet.

19-8599; Rev 3; 2/26

© 2026 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners.

Typical Operating Circuit

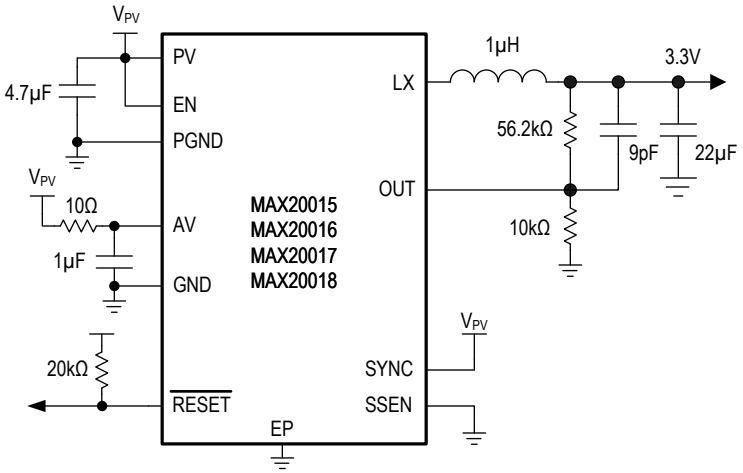

MAX20018
$5V_{IN}$, $3.3V_{OUT}$, 3A Configuration

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.