


NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4, 2 OZ. COPPER.
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH
HOLES WITH COPPER, .001 INCH THICK MIN. ALL
HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/- .003
INCH IN RELATION TO CENTER
4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR GREEN.
5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
7. SCORING:

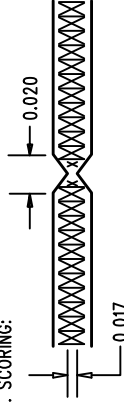

FAB DRAWING

SIZE	QTY	SYM	PLTD
15	20	+	PLTD
95	5	X	PLTD
80	4	□	PLTD
35	3	◇	PLTD
70	2	⊗	NPLTD

APPROVALS		LINEAR TECHNOLOGY		1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
DRAWN	INIT	DATE			
CHECK					
DESIGN	JUNE WU	11/27/01	TITLE: SINGLE CELL WHITE LED DRIVER		
ENGR	David C.	11/27/01			
			SIZE	DEMO	REV. A
			A	DC484A LT1937ES5	A
SCALE = NONE			DES-230501 SHT 1 of 1		