


REVISION HISTORY

ECO	REV	DESCRIPTION	APP. ENG.	DATE
-	1	1ST PROTOTYPE	CLARENCE M.	06-24-14

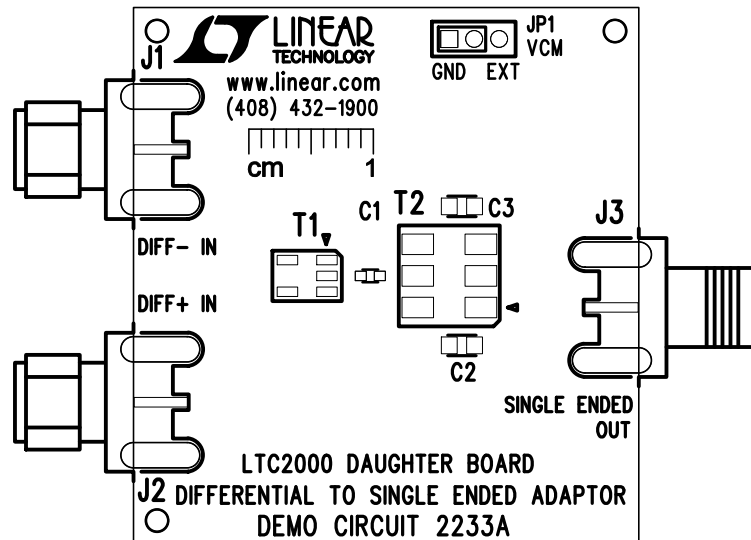


NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
2. ASSEMBLY PROCESS SHALL INCLUDE: REFLOW SOLDER TOP SIDE SMD. MAXIMUM SOLDER TEMPERATURE IS 240 DEGREES CELSIUS.
3. PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS. LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER. MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
4. INSTALL SHUNT AS SHOWN.
5. DEPANELIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
6. DO NOT APPLY ANY KIND OF ASSEMBLY STAMP OR QA STAMP TO ANY BOARD.

APPROVALS

PCB DES.	KIM T.
APP ENG.	CLARENCE M.
SCALE = NONE	

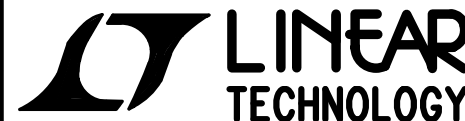

1630 MCCARTHY BLVD
MILPITAS, CA 95035
PH: (408)432-1900
www.linear.com
LTC CONFIDENTIAL-
FOR CUSTOMER USE ONLY

TITLE: TOP ASSEMBLY DRAWING
DIFFERENTIAL TO SINGLE ENDED ADAPTOR

SIZE N/A	IC NO. LTC2000 DAUGHTER BOARD DEMO CIRCUIT 2233A	REV. 1
FILENAME: DC2233A-1.PCB		SHT 1 OF 1