

REVISIONS			
REV	DESCRIPTION	APPROVED	DATE
A	RELEASE		

NOTES: UNLESS OTHERWISE SPECIFIED

1. DIMENSIONS ARE IN INCHES (EXCEPT WHERE NOTED).

MATERIAL: (USE CHECKED ITEMS FOR MATERIAL)

2. BOARD MATERIAL:

(X) FR4 (RHS COMPLIANT) OR EQUIVALENT

( ) ISOLA-FR408HR

( ) NELCO-4000-13 OR EQUIVALENT

( ) 370HR (RHS COMPLIANT) OR EQUIVALENT

( ) ROGERS 4350B

( ) ROGERS 4003C

( ) OTHER \_\_\_\_\_

3. THE PCB SHALL BE FABRICATED TO IPC-6012, TYPE X, CLASS 2. WORKMANSHIP SHALL CONFORM TO IPC-A-600, CLASS 2. CURRENT REVISIONS

4. BOARD MATERIAL & CONSTRUCTION SHALL MEET THE REQUIREMENTS OF ULTR96 WITH FLAMMABILITY RATING OF 94V-0.

5. OVERALL BOARD THICKNESS REFER TO LAMINATION DIAGRAM. TOLERANCE APPLIES AFTER ALL LAMINATION AND PLATING PROCESSES. IT IS TO BE MEASURED FROM TOP PCB METAL TO BOTTOM PCB METAL UNLESS OTHERWISE SPECIFIED.

6. BOW & TWIST NOT TO EXCEED 0.0075 IN. (0.75%) PER LINEAR INCH.

7. BOW & TWIST SHOULD BE MEASURED PER IPC-TM-650, METHOD 2.4.22.

7. PHOTO ETCH CIRCUITRY PER ENCLOSED GERBER RS274X OR ODB++ FORMAT FILE.  
DRILL LOCATION AND SIZE CONTROLLED BY EXCELLON CNC DRILL FILE.

8. IF STATED IN THE LAMINATION DIAGRAM, THE DIELECTRIC THICKNESS OF ANY CONTROLLED IMPEDANCE LAYER IS FOR REFERENCE ONLY. FINAL ACCEPTANCE SHALL BE DETERMINED BY THESE LAYERS HAVING A CHARACTERISTIC IMPEDANCE OF +/- 10% OHMS AS STATED IN THE LAMINATION DIAGRAM. THE VENDOR CAN MAKE ADJUSTMENTS AS LONG AS THE STATED IMPEDANCE AND OVERALL BOARD THICKNESS IS MAINTAINED. ANY ADJUSTMENT MADE TO TRACE WIDTH OR SPACING MUST HAVE PRIOR WRITTEN APPROVAL FROM MAXIM.

9. ALL TRACES FILLETED OPTION TO ENHANCE RELIABILITY AT PAD JUNCTIONS WHERE SPACING PERMITS, UNLESS OTHERWISE SPECIFIED:

( ) FILLETED

10. LAYER TO LAYER REGISTRATIONS SHALL BE WITHIN .003 INCHES.  
LEGEND TO LEGEND +/- 0.007 INCHES

FINISH: (USE CHECKED ITEMS FOR PLATING)

11. PLATING SPECIFICATION:

(X) STARTING COPPER WEIGHT FOR OUTER LAYERS TO BE {1 OZ}, THE FINISH COPPER WEIGHT IS {1 OZ} FOR OUTER LAYERS WHERE SPACING PREVENTS THE USE OF {1 OZ} AS A STARTING WEIGHT THE STARTING WEIGHT CAN BE {0.5 OZ} AS LONG AS THE FINISH COPPER WEIGHT IS {1 OZ} UNLESS OTHERWISE SPECIFIED

( ) STARTING COPPER WEIGHT FOR OUTER LAYERS TO BE ( 1 OZ ), THE FINISH COPPER WEIGHT IS ( 2 OZ ) FOR OUTER LAYERS WHERE SPACING PREVENTS THE USE OF ( 1 OZ ) AS A STARTING WEIGHT. THE STARTING WEIGHT CAN BE ( 0.5 OZ ) AS LONG AS THE FINISH COPPER WEIGHT IS ( 2 OZ ). UNLESS OTHERWISE SPECIFIED

( ) STARTING COPPER WEIGHT FOR OUTER LAYERS TO BE {2 OZ}, THE FINISH COPPER WEIGHT IS {2 OZ} MINIMUM FOR OUTER LAYERS WHERE SPACING PREVENTS THE USE OF {2 OZ} AS A STARTING WEIGHT. THE STARTING WEIGHT CAN BE {<2 OZ} AS LONG AS THE FINISH COPPER WEIGHT IS {2 OZ}. UNLESS OTHERWISE SPECIFIED

( ) OTHER \_\_\_\_\_

. CHECK ALL THAT APPLY

( ) FINISH CONDUCTOR SURFACES: IMMERSION GOLD, 3-8 MICRO INCHES OVER  
100 MICRO INCHES MINIMUM OF ELECTROLESS NICKEL.

(X) LEAD FREE AND RoHS COMPLIANT OR EQUIVALENT LEAD FREE PLATING

( ) ELECTRODEPOSITED HARD GOLD PLATE, TYPE 1 (99.75 MIN GOLD), GRADE C (KNOOP HARDNESS 130-200), CLASS 1 (50-100 MICROINCHES THICK) IN ACCORDANCE WITH MIL-G-45204C GENERAL SURFACING REQUIREMENTS MUST MEET ANSI/IPC-A-600(CURRENT REV) SECTION 4.0, CLASS 3 (50-100 MICROINCHES THICK) OVER ELECTRODEPOSITED NICKEL PLATE IN ACCORDANCE WITH ANSI/IPC-A-600D, SECTION 4.0, CLASS 3 (200-600 MICROINCHES THICK).

( ) FINISH CONDUCTOR SURFACES: IMMERSION GOLD, 2-5 MICRO INCHES OVER  
118-236 MICRO INCHES MINIMUM OF ELECTROLESS NICKEL.

( ) FINGERS TO BE GOLD PLATED.  
( ) OTHER \_\_\_\_\_

13. DRILL SIZES ARE FINISHED HOLE SIZES. ALL HOLES SHALL BE LOCATED WITHIN .005 DTP. MINIMUM BARREL PLATING OF .001 IN. PLATED HOLES SHALL NOT BE ROUGH OR IRREGULAR SO AS TO HINDER PROPER SOLDER WICKING.

14. CHECK ALL THAT APPLY

(X) GREEN SOLDERMASK OVER BARE COPPER/BARE GOLD (BOTH SIDES) WITH LIQUID PHOTO IMAGEABLE INK (LPI)

PER ARTWORK.  
( ) GREEN TAIYO PSR-4000  
( ) OTHER

15. CHECK ALL THAT APPLY

(X) APPLY SILKSCREEN USING A NON-CONDUCTIVE, WHITE EPOXY  
BASED INK PER ARTWORK.

( ) OTHER \_\_\_\_\_

16. VENDOR LOGO & DATE CODE REQUIRED IN INK ON BOTTOM SIDE ONLY. DATE CODE FORMAT MUST BE YYWW ONLY.

17. FINAL ELECTRICAL TEST TO BE PERFORMED USING PROVIDED IPC-D-356A NETLIST OR ODB++ FORMAT FILE  
(REQUIRED UNLESS OTHERWISE SPECIFIED IN QUOTE)  
THE PCB SHALL HAVE A VERIFICATION STAMP.

18. A TIME DOMAIN REFLECTOMETER REPORT FOR EACH IMPEDANCE CONTROLLED LAYER AND A CERTIFICATE OF COMPLIANCE SHALL BE PROVIDED BY VENDOR AT TIME OF SHIPMENT.

MISCELLANEOUS:

19. IF PRESENT, ALL BLIND/BURIED VIAS WITH AN ASPECT RATIO  $< 1:1$  TO BE PLATED SHUT WITH COPPER WHEN USED AS VIA IN PAD OR AS A STACKED VIA. BLIND/BURIED VIAS WITH AN ASPECT RATIO  $> 1:1$  TO BE FILLED WITH NON-CONDUCTIVE EPOXY, UNLESS OTHERWISE SPECIFIED.

20. FOR ALL DRILL INFORMATION REFER TO DRILL CHART.  
 ( ) NON-CONDUCTIVE EPOXY. FILL AND CAP ALL 0.0XXX INCH DRILLED VIAS  
 ( ) SILVER. FILL AND CAP ALL 0.0XXX INCH DRILLED VIAS.


21. FINISHED SURFACE CONTACTS AND FILLED VIAS TO BE FREE OF ANY PITS, SCRATCHES PROBE MARK OR OTHER DEFORMITIES THAT COULD EFFECT THE APPERANCE AND PERFORMANCE OF THE CONTACT SURFACE. CONTACTS ARE TO BE AS FLAT AS POSSIBLE. NOT TO EXCEED +/- 0.001" OF FLATNESS.


22. THIEVING:

( ) SUPPLIER MAY ADD THIEVING TO COMPENSATE FOR LOW COPPER DENSITY AREAS ON THIS DESIGN.

(X) SUPPLIER MAY NOT ADD THIEVING TO COMPENSATE FOR LOW COPPER DENSITY AREAS ON THIS DESIGN.

23. PENNUT  
☐ PENNUTS TO BE INSTALLED BY SUPPLIER  
☐ PENNUTS NOT TO BE INSTALLED BY SUPPLIER  
☒ NOT APPLICABLE

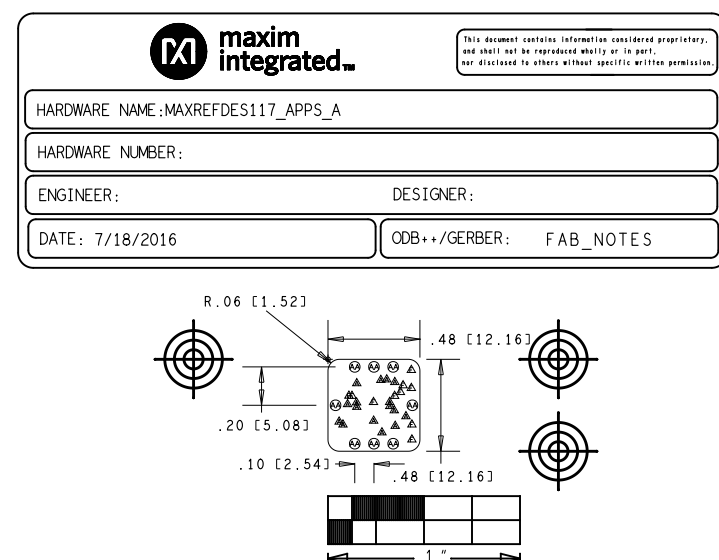

LAMINATION DIAGRAM					
LAYER NUMBER	LAYER NAME	FINISHED CU WEIGHT (OZ)	DIELECTRIC THICKNESS (in.)	DIELECTRIC MATERIAL	
1	TOP	1		FOIL	
2	L2_GND	1		TBD	FR4(RoHS)/EIOIV
3	L3_PWR	1		TBD	FR4(RoHS)/EIOIV
4	BOTTOM	1		TBD	FR4(RoHS)/EIOIV
THE FINISHED PCB THICKNESS TO BE:			0.031" +/- 0.005"		

DRILL CHART: TOP to BOTTOM				
ALL UNITS ARE IN MILS				
FIGURE	SIZE	TOLERANCE	PLATED	QTY
A	5.0	+3.0/-3.0	PLATED	10
B	6.0	+3.0/-4.0	PLATED	16
C	47.24	+3.0/-3.0	PLATED	8

			<div><div></div><div>maxim integrated™</div></div>			
TOLERANCES UNLESS OTHERWISE SPECIFIED			THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO MAXIM. THE INFORMATION IN THIS DOCUMENT IS NOT TO BE SHOWN, REPRODUCED, OR DISCLOSED TO ANYONE OUTSIDE OF MAXIM WITHOUT PRIOR WRITTEN PERMISSION FROM MAXIM.			
FRACTIONS	DECIMALS	ANGLES				
$\frac{\text{ } / \text{ }}{\text{ }}$	.XX +/- .01 .XXX +/- .005	$\angle \text{ } / \text{ }$				
MATERIAL:						
SEE NOTES			DRAWN BY:	DATE: 7/18/2016	TITLE: FABRICATION DWG. MAXREFDES117_APPS	
FINISH:			CHECKED BY:	DATE:		
SEE NOTES			APPR. BY:	DATE:		
			APPR. BY:	DATE:		
			NOT TO SCALE		TEMPLATE REV 1.6	SHEET 1 OF